



(12) **United States Patent**  
**Conrad**

(10) **Patent No.:** **US 10,827,889 B2**  
(45) **Date of Patent:** **Nov. 10, 2020**

- (54) **SURFACE CLEANING APPARATUS**
- (71) Applicant: **Omachron Intellectual Property Inc.**,  
Hampton (CA)
- (72) Inventor: **Wayne Ernest Conrad**, Hampton (CA)
- (73) Assignee: **Omachron Intellectual Property Inc.**,  
Hampton (CA)
- (\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 273 days.

- (56) **References Cited**
- U.S. PATENT DOCUMENTS
- 4,894,882 A 1/1990 Toya
- 5,107,567 A 4/1992 Ferrari et al.
- 5,230,722 A 7/1993 Yonkers
- (Continued)

FOREIGN PATENT DOCUMENTS

- CN 1506016 A 6/2004
- CN 1626025 A 6/2005
- (Continued)

- (21) Appl. No.: **15/993,189**
- (22) Filed: **May 30, 2018**

OTHER PUBLICATIONS

TotalPatent: English machine translation of CN101288572; pub-  
lished on Oct. 22, 2008.  
(Continued)

- (65) **Prior Publication Data**
- US 2019/0365173 A1 Dec. 5, 2019

*Primary Examiner* — Minh Chau T Pham  
(74) *Attorney, Agent, or Firm* — Philip C. Mendes da  
Costa; Bereskin & Parr LLP/S.E.N.C.R.L., s.r.l.


- (51) **Int. Cl.**
- B01D 45/12** (2006.01)
- A47L 9/22** (2006.01)
- A47L 9/20** (2006.01)
- A47L 9/10** (2006.01)
- A47L 5/24** (2006.01)
- B01D 46/00** (2006.01)
- (Continued)
- (52) **U.S. Cl.**
- CPC ..... **A47L 9/102** (2013.01); **B01D 45/16**  
(2013.01); **B01D 46/002** (2013.01); **B01D**  
**50/002** (2013.01); **B01D 2279/55** (2013.01)

(57) **ABSTRACT**

A surface cleaning apparatus includes an air flow path, a filter housing, and a filter member in the filter housing. An air treatment member, a suction motor, and the filter housing are positioned in the air flow path. The filter member includes a plurality of individual filter elements arranged in parallel, each including porous filter material having at least one upstream face and at least one portion defining a porous filter media air outlet. The at least one upstream face has a larger surface area than the at least one portion. An outside gap is provided between at least some of the upstream faces and opposed facing walls of the filter housing, and an inside gap is provided between opposed upstream faces. A cross-sectional area of the outside gaps and the inside gaps is at least as large as a cross-sectional area of an air treatment member air inlet.

- (58) **Field of Classification Search**
- CPC .... B01D 46/002; B01D 50/002; B01D 45/16;  
B01D 2279/55; A47L 9/102; A47L 9/122;  
A47L 9/322; A47L 9/22; A47L 9/20;  
A47L 9/2884; A47L 5/24; A47L 9/10
- USPC .... 55/459.1, 429, 433, DIG. 3; 15/347, 352,  
15/353, 300.1
- See application file for complete search history.

**19 Claims, 39 Drawing Sheets**

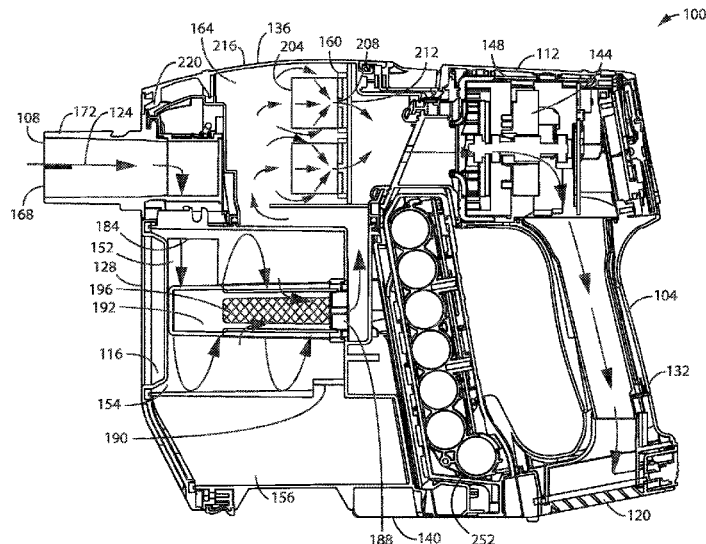

- (51) **Int. Cl.**  
**B01D 50/00** (2006.01)  
**B01D 45/16** (2006.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,113,663	A	9/2000	Liu
6,129,550	A	10/2000	Culberson et al.
6,406,505	B1	6/2002	Oh et al.
6,775,882	B2	8/2004	Murphy et al.
6,901,625	B2	6/2005	Yang et al.
7,335,242	B2	2/2008	Oh
7,488,362	B2	2/2009	Jeong et al.
7,540,894	B2	6/2009	Ni
7,645,309	B2	1/2010	Jeong et al.
7,708,789	B2	5/2010	Fester
7,887,612	B2	2/2011	Conrad
8,206,482	B2	6/2012	Williams et al.
8,544,143	B2	10/2013	Hwang et al.
8,997,309	B2	4/2015	Conrad
2001/0018865	A1	9/2001	Wegelin et al.
2002/0092119	A1	7/2002	Vystrcil et al.
2003/0084536	A1	5/2003	Yung
2006/0090290	A1	5/2006	Lau
2007/0033765	A1	2/2007	Walker et al.
2007/0067943	A1	3/2007	Makarov
2008/0178416	A1	7/2008	Conrad
2010/0236016	A1	9/2010	Tran
2010/0299866	A1	12/2010	Conrad
2011/0219570	A1	9/2011	Conrad
2011/0219575	A1	9/2011	Conrad
2012/0023701	A1	2/2012	Lenkiewicz et al.
2012/0304417	A1	12/2012	Riley
2013/0091660	A1	4/2013	Smith
2013/0091661	A1	4/2013	Smith
2013/0232722	A1	9/2013	Conrad
2014/0237768	A1	8/2014	Conrad
2016/0120382	A1	5/2016	Conrad
2017/0290479	A1*	10/2017	Conrad ..... A47L 9/1608
2017/0290481	A1*	10/2017	Conrad ..... A47L 5/24
2018/0303301	A1*	10/2018	Conrad ..... A47L 9/1641
2019/0290084	A1*	9/2019	Conrad ..... A47L 9/1666
2019/0320863	A1*	10/2019	Conrad ..... A47L 9/1666
2020/0022546	A1*	1/2020	Conrad ..... A47L 9/122
2020/0022547	A1*	1/2020	Conrad ..... A47L 5/16
2020/0046190	A1*	2/2020	Conrad ..... A47L 9/1683
2020/0077854	A1*	3/2020	Conrad ..... A47L 9/1683

FOREIGN PATENT DOCUMENTS

CN	100998484	A	7/2007
CN	101108106	A	1/2008
CN	101108110	A	1/2008
CN	201008534	Y	1/2008
CN	101288572	A	10/2008
CN	101288574	A	10/2008
CN	201131706	Y	10/2008
CN	101612025	A	12/2009
CN	101822506	A	9/2010
CN	202277306	U	6/2012
CN	103040412	A	4/2013
CN	103040413	A	4/2013
CN	102256523	B	11/2014
DE	10110581	C2	11/2003
DE	69907201	T2	2/2004
DE	10360002	A1	12/2004
DE	60116336	T2	8/2006
DE	102007011457	A1	10/2007
DE	102004055192	B4	11/2007
DE	102005015004	B4	2/2008
DE	102005008278	B4	3/2008
DE	102005014541	B4	8/2008
DE	112007001314	T5	4/2009
DE	202012101457	U1	8/2012
DE	112011104642	T5	10/2013
DE	112012000251	T5	10/2013

EP	1559359	A2	8/2005
JP	03176019	A	7/1991
JP	2006272019	A	10/2006
JP	2010227287	A	10/2010
KR	1020040050174	A	6/2004
KR	1020040088978	A	10/2004
KR	1020050091821	A	9/2005
KR	1020050091824	A	9/2005
KR	1020050091826	A	9/2005
KR	1020050091829	A	9/2005
KR	1020050091830	A	9/2005
KR	1020050091833	A	9/2005
KR	1020050091834	A	9/2005
KR	1020050091835	A	9/2005
KR	1020050091836	A	9/2005
KR	1020050091837	A	9/2005
KR	1020050091838	A	9/2005
KR	1020050103343	A	10/2005
KR	1020050104613	A	11/2005
KR	1020050104614	A	11/2005
KR	1020050108623	A	11/2005
KR	1020060008365	A	1/2006
KR	1020060018004	A	2/2006
KR	1020060112420	A	11/2006
KR	1020060118795	A	11/2006
KR	1020060118800	A	11/2006
KR	1020060118801	A	11/2006
KR	1020060118802	A	11/2006
KR	1020060118803	A	11/2006
KR	1020060119587	A	11/2006
KR	1020060122249	A	11/2006
WO	9930602	A2	6/1999
WO	2008070971	A1	6/2008
WO	2008070972	A1	6/2008
WO	2008070975	A1	6/2008

OTHER PUBLICATIONS

TotalPatent: English machine translation of CN101108110, published on Jan. 23, 2008.

TotalPatent: English machine translation of CN101108106; published on Jan. 23, 2008.

TotalPatent: English machine translation of CN100998484, published on Jul. 18, 2007.

TotalPatent: English machine translation of DE69907201, published on Feb. 5, 2004.

TotalPatent: English machine translation of DE60116336, published on Aug. 31, 2006.

TotalPatent: English machine translation of DE10360002; published on Dec. 16, 2004.

TotalPatent: English machine translation of DE10110581, published on Nov. 13, 2003.

TotalPatent: English machine translation of JP03176019, published on Jul. 31, 1991.

TotalPatent: English machine translation of CN1626025, published on Jun. 15, 2005.

TotalPatent: English machine translation of CN1506016, published on Jun. 23, 2005.

English machine translation of KR1020060122249, published on Nov. 30, 2006.

English machine translation of KR1020060119587, published on Nov. 24, 2006.

English machine translation of KR1020060118803, published on Nov. 24, 2006.

English machine translation of KR1020060118802, published on Nov. 24, 2006.

English machine translation of KR1020060118801, published on Nov. 24, 2006.

English machine translation of KR1020060118800, published on Nov. 24, 2006.

English machine translation of KR1020060118795, published on Nov. 24, 2006.

English machine translation of KR1020060112420, published on Nov. 1, 2006.

(56)

**References Cited**

## OTHER PUBLICATIONS

English machine translation of KR1020060018004, Published on Feb. 28, 2006.  
English machine translation of KR1020060008365, published on Jan. 26, 2006.  
English machine translation of KR1020050108623, published on Nov. 17, 2005.  
English machine translation of KR1020050104614, published on Nov. 3, 2005.  
English machine translation of KR1020050104613, published on Nov. 3, 2005.  
English machine translation of KR1020050103343, published on Oct. 31, 2005.  
English machine translation of KR1020050091838, published on Sep. 15, 2005.  
English machine translation of KR1020050091837, published on Sep. 15, 2005.  
English machine translation of KR1020050091836, published on Sep. 15, 2005.  
English machine translation of KR1020050091835, published on Sep. 15, 2005.  
English machine translation of KR1020050091834, published on Sep. 15, 2005.  
English machine translation of KR1020050091833, published on Sep. 15, 2005.  
English machine translation of KR1020050091830, published on Sep. 15, 2005.  
English machine translation of KR1020050091829, published on Sep. 15, 2005.  
English machine translation of KR1020050091826, published on Sep. 15, 2005.  
English machine translation of KR1020050091824, published on Sep. 15, 2005.  
English machine translation of KR1020050091821, published on Sep. 15, 2005.  
English machine translation of KR1020040088978, published on Oct. 20, 2004.  
English machine translation of KR1020040050174, published on Jun. 16, 2004.  
English machine translation of DE202012101457, published on Aug. 16, 2012.  
English machine translation of DE112012000251, published on Oct. 17, 2013.

English machine translation of DE112011104642, published on Oct. 2, 2013.  
English machine translation of DE112007001314, published on Apr. 23, 2009.  
English machine translation of DE102007011457, published on Oct. 25, 2007.  
English machine translation of DE102005015004, published on Feb. 7, 2008.  
English machine translation of DE102005014541, published on Aug. 28, 2008.  
English machine translation of DE102005008278, published on Mar. 27, 2008.  
English machine translation of DE102004055192, published on Nov. 15, 2007.  
English machine translation of JP2010227287, published on Oct. 14, 2010.  
English machine translation of JP2006272019, published on Oct. 12, 2006.  
English machine translation of CN202277306, published on Jun. 20, 2012.  
English machine translation of CN201131706, published on Oct. 15, 2008.  
English machine translation of CN201008534, published on Jan. 23, 2008.  
English machine translation of CN103040413, published on Apr. 17, 2013.  
English machine translation of CN103040412, published on Apr. 17, 2013.  
English machine translation of CN102256523, published on Nov. 5, 2014.  
English machine translation of CN101822506, published on Sep. 8, 2010.  
English machine translation of CN101612025, published on Dec. 30, 2009.  
International Search Report and Written Opinion, received in connection to international patent application No. PCT/CA2013/000121, mailed on.  
Abstract of the Japanese Patent Application No. JP03176019A, as received in connection to International patent application No. PCT/CA2013/000121.  
International Search Report which issued in connection to co-pending International Patent Application No. PCT/CA2019/05736, dated Jul. 24, 2019.

\* cited by examiner

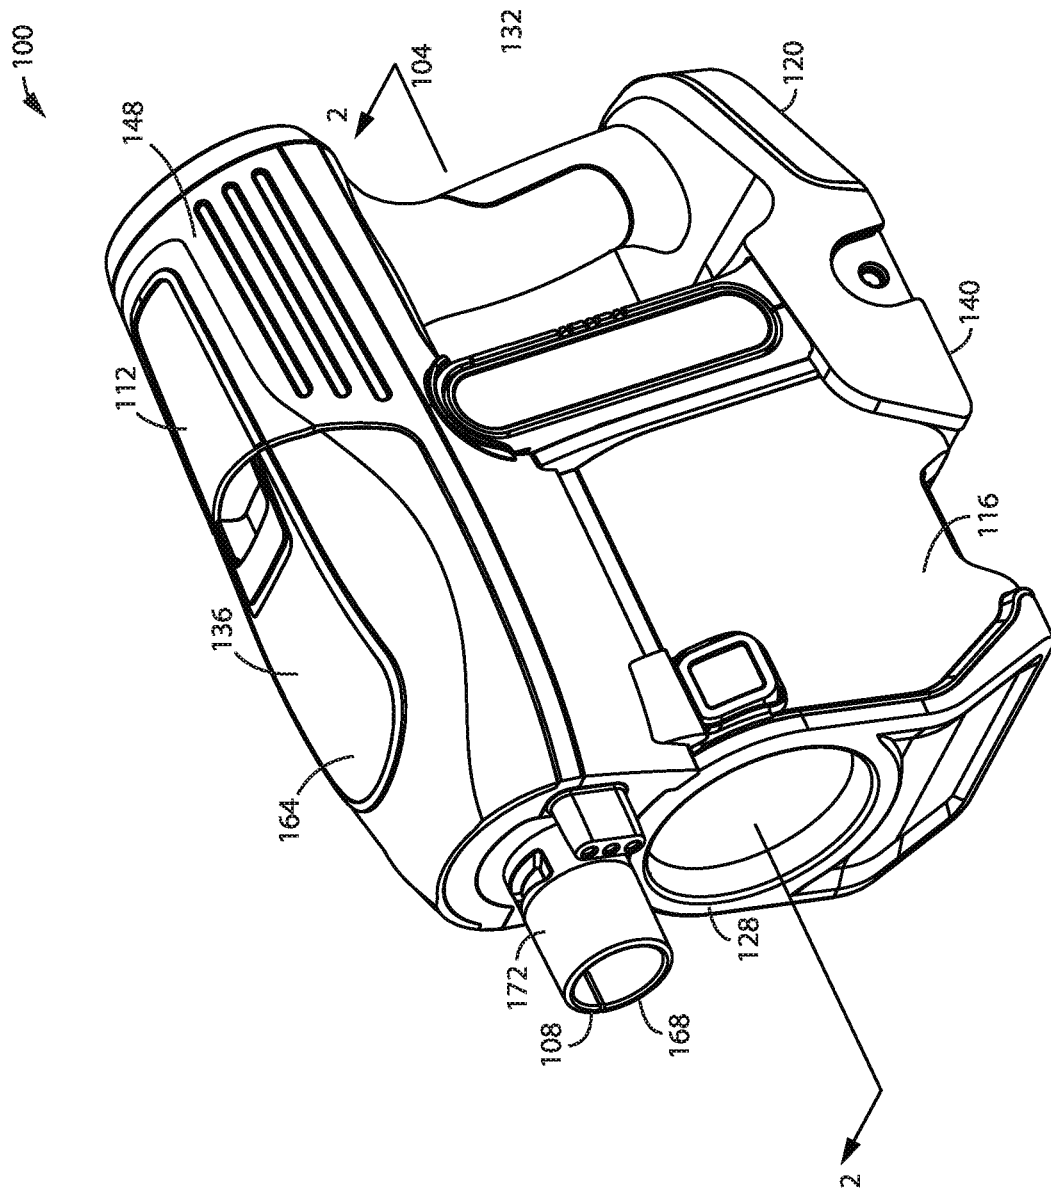


FIG. 1

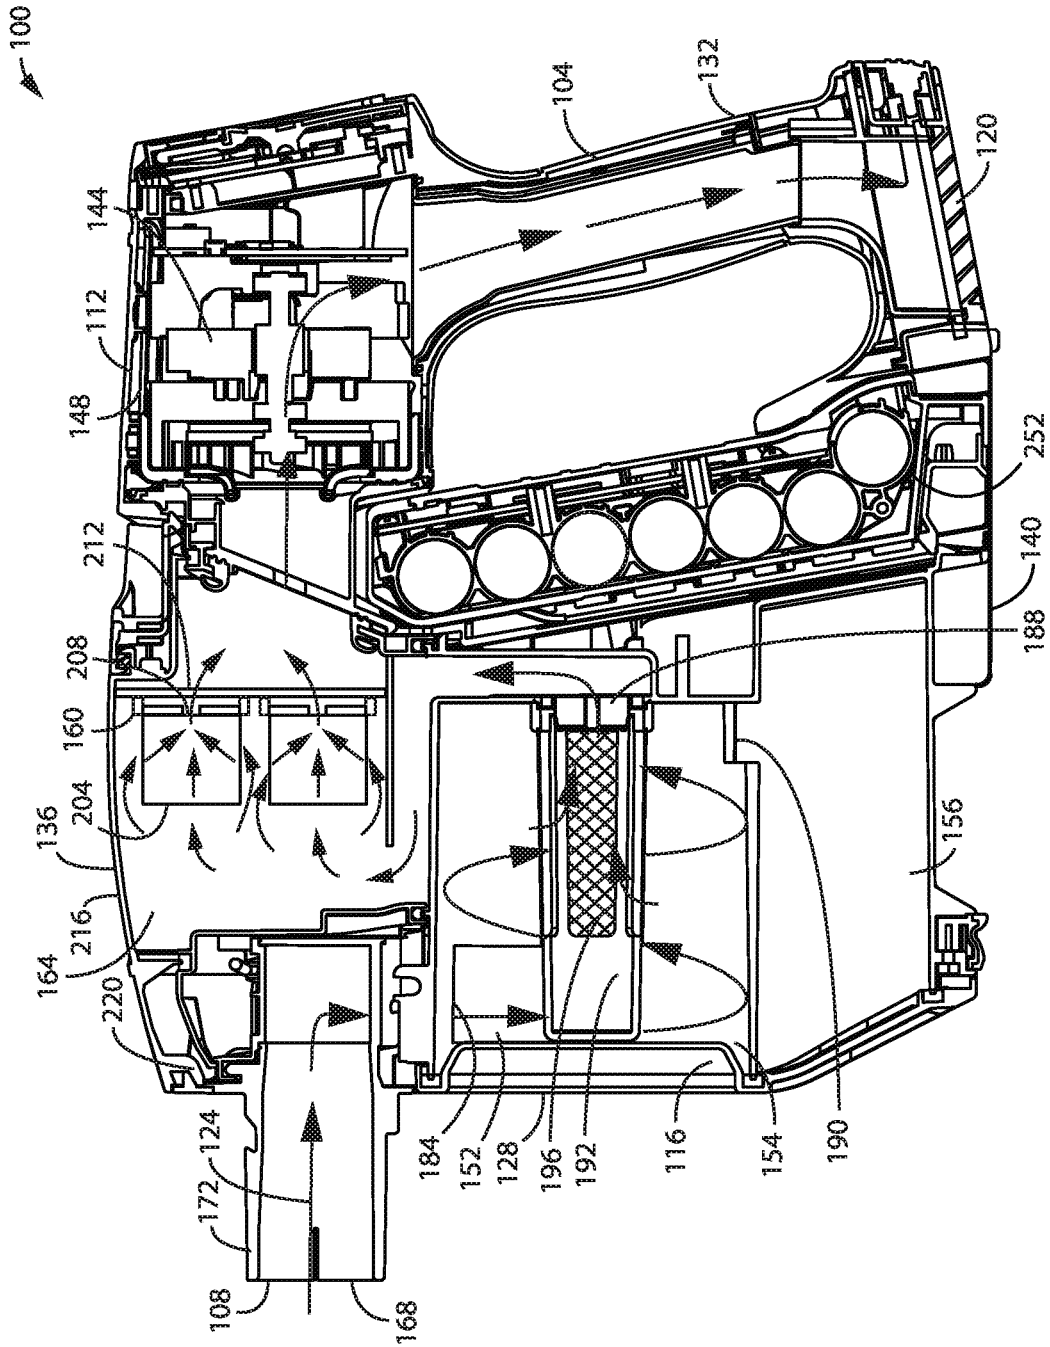


FIG. 2

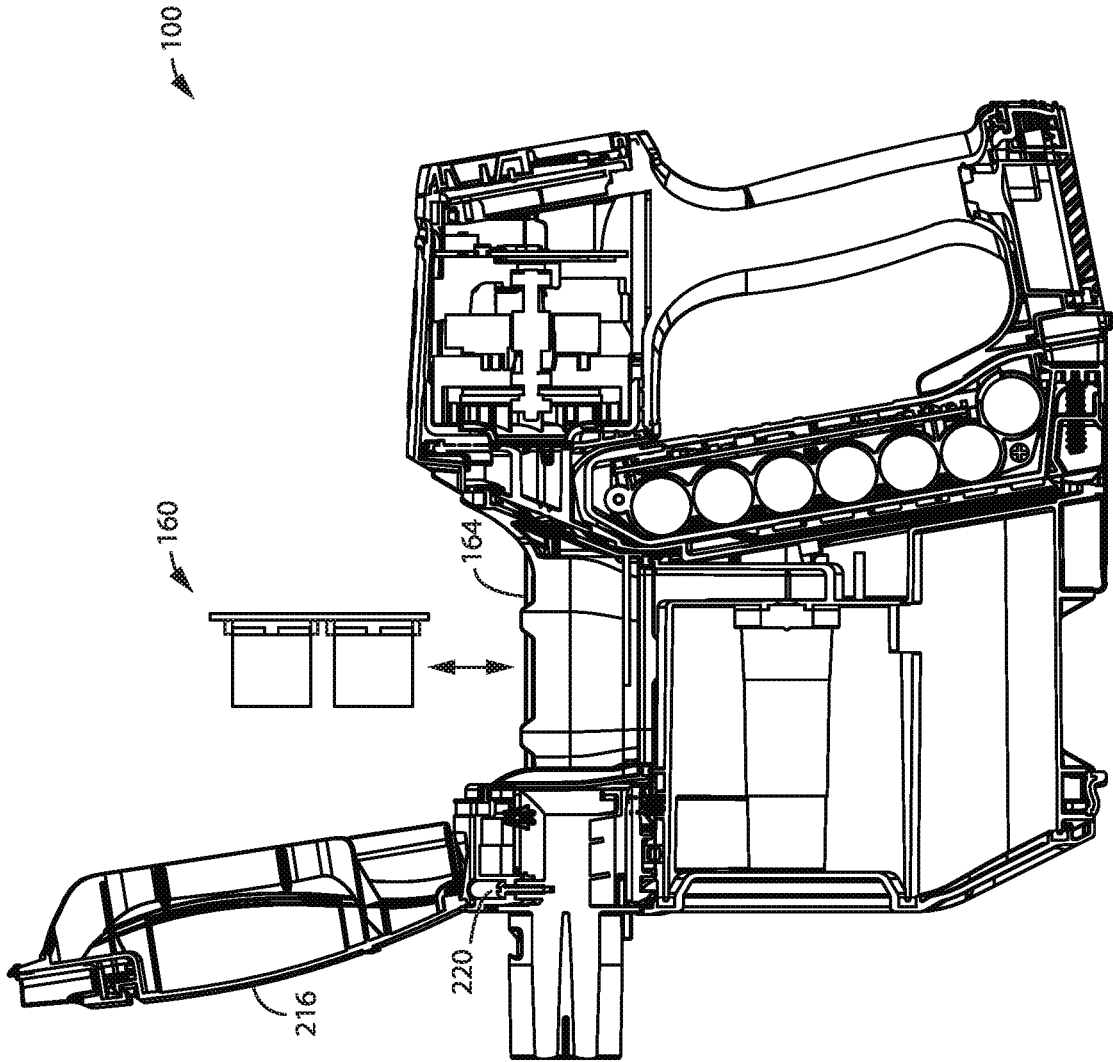


FIG. 3

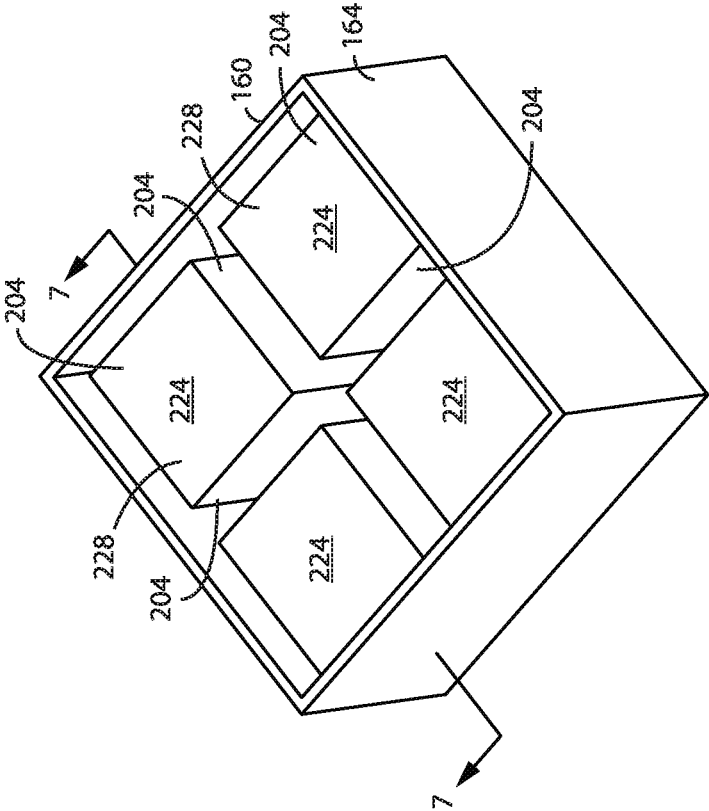


FIG. 4

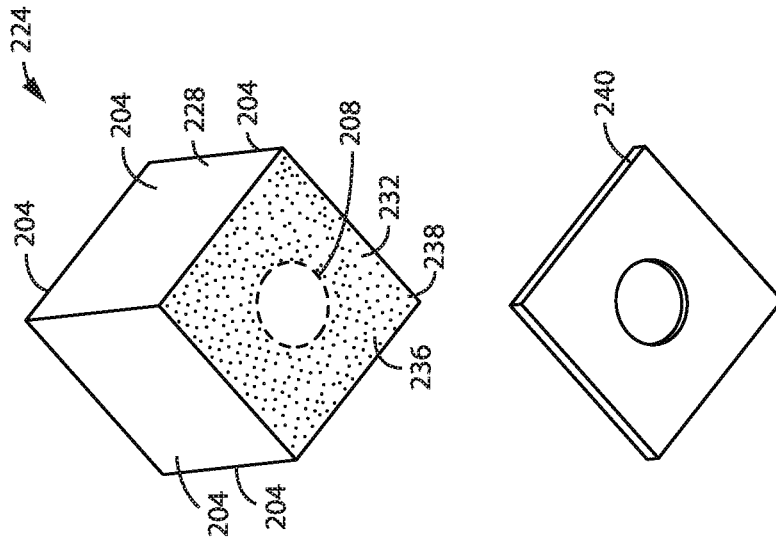


FIG. 5A

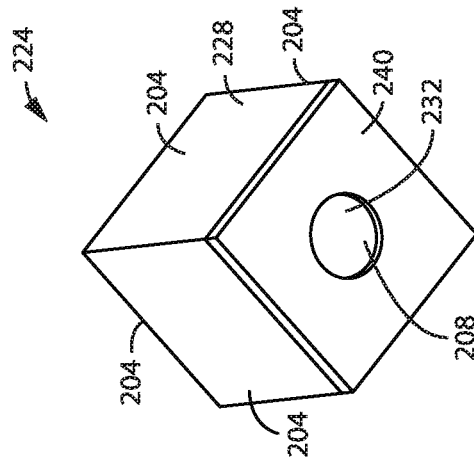


FIG. 5B



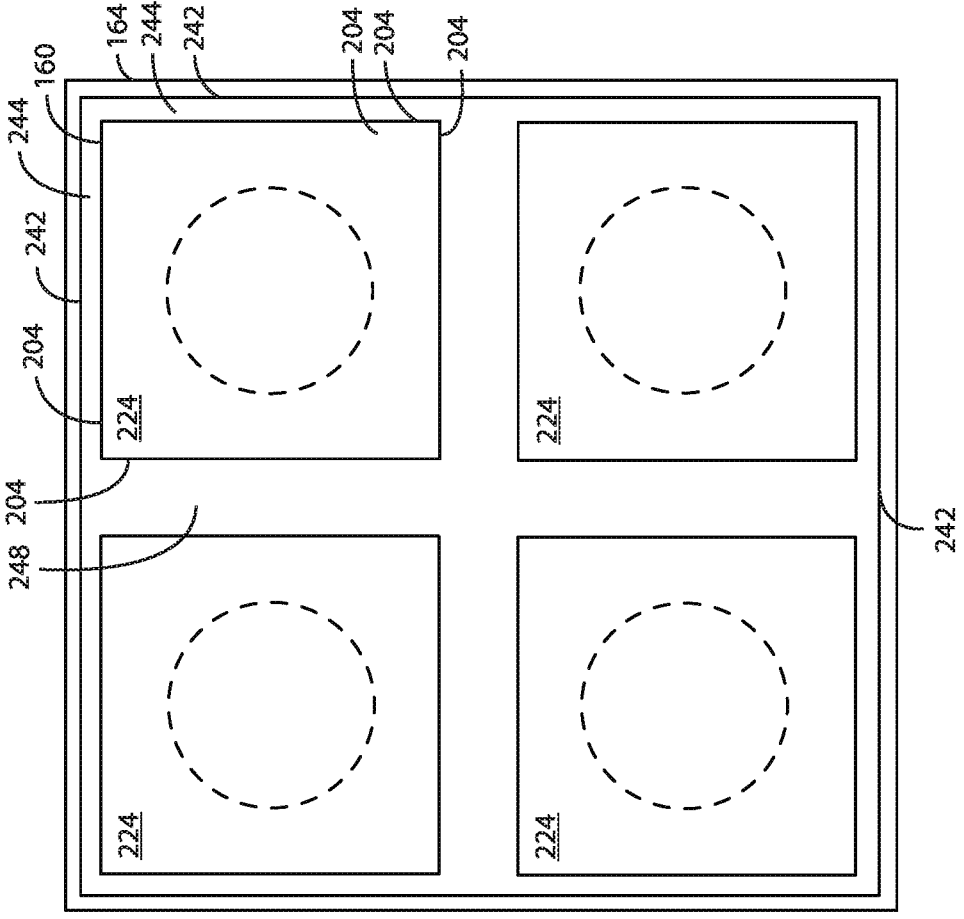


FIG. 6

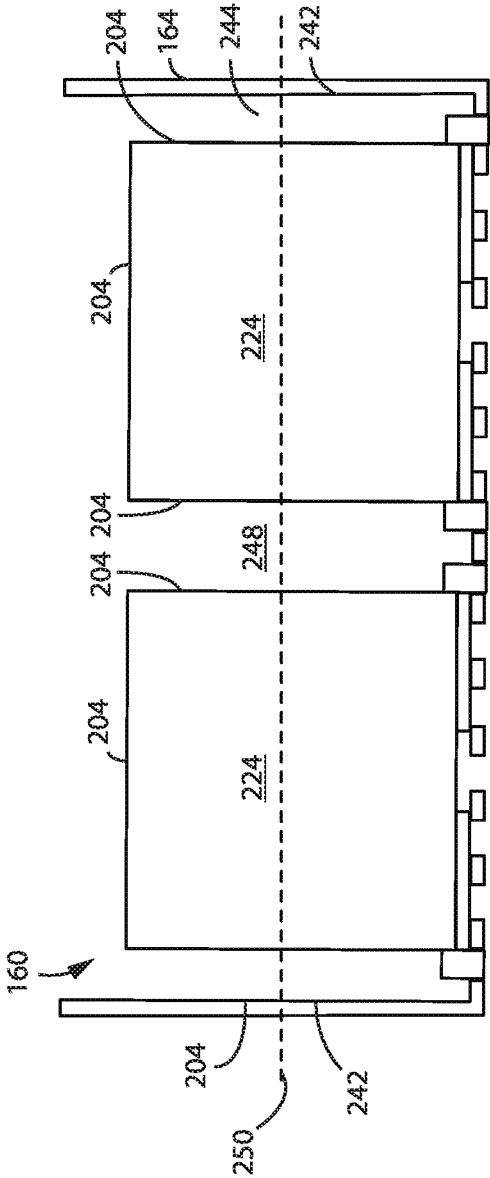


FIG. 7

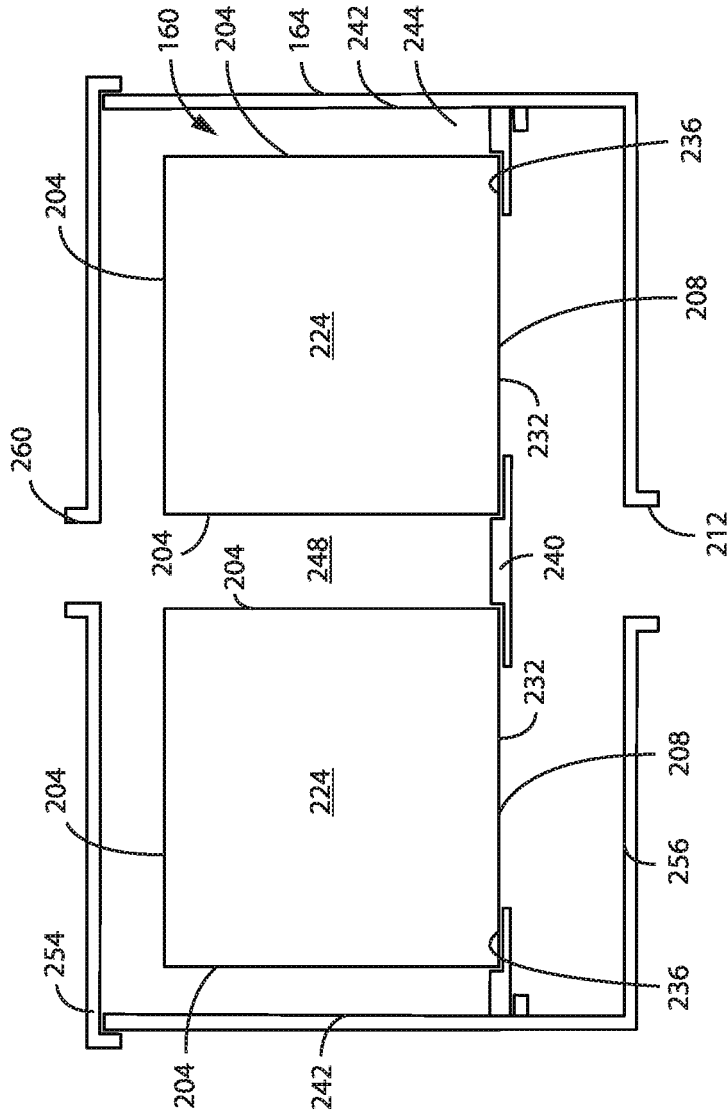


FIG. 8

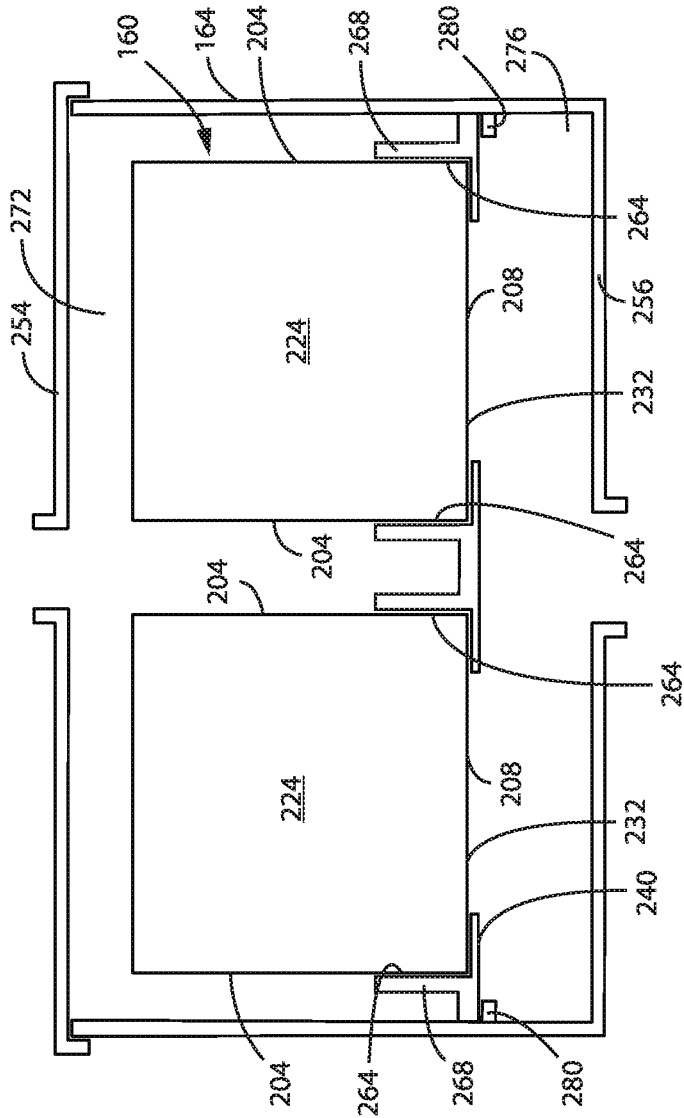


FIG. 9

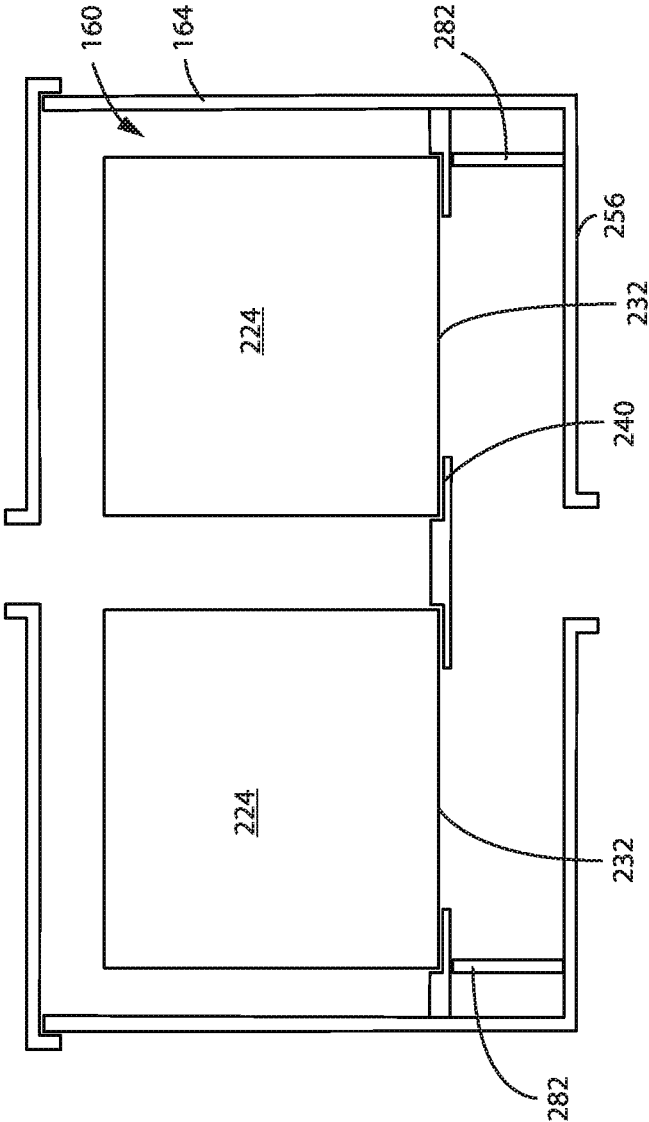


FIG. 10

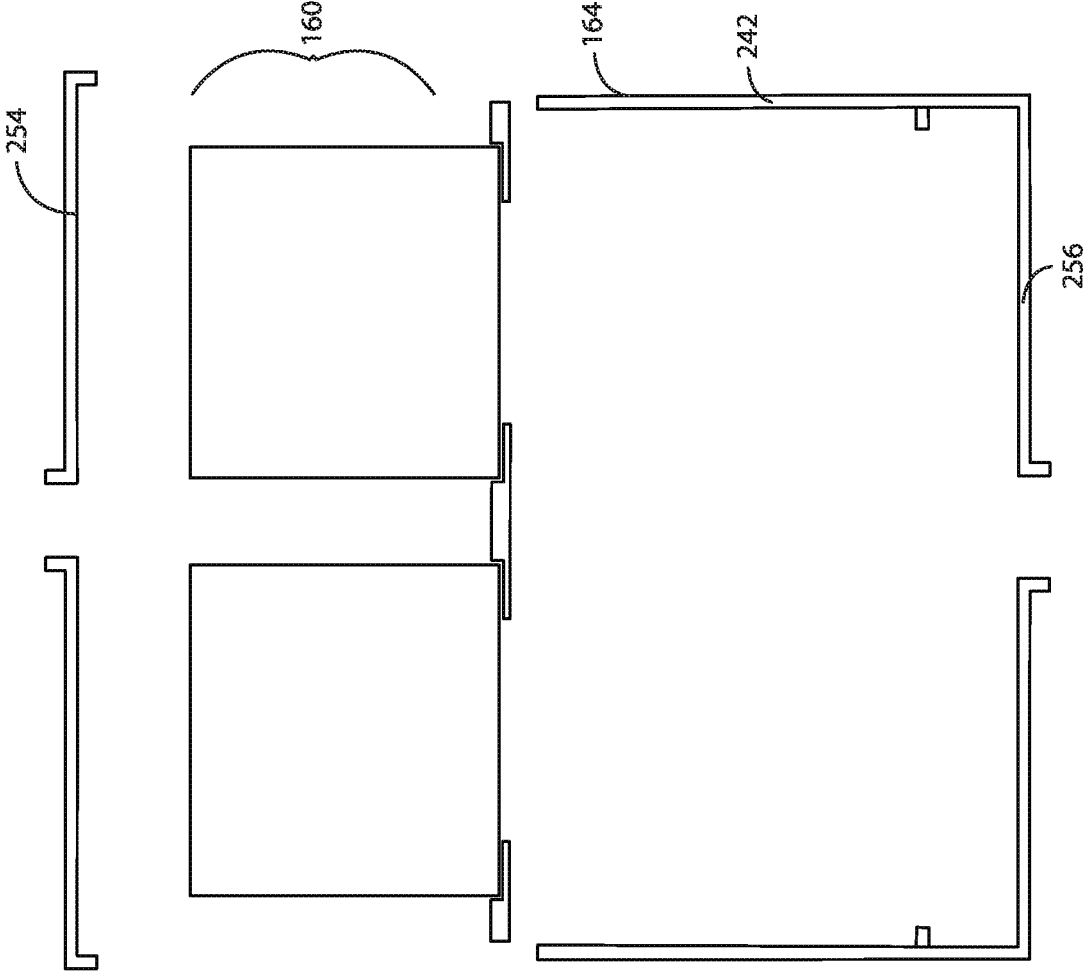


FIG. 11

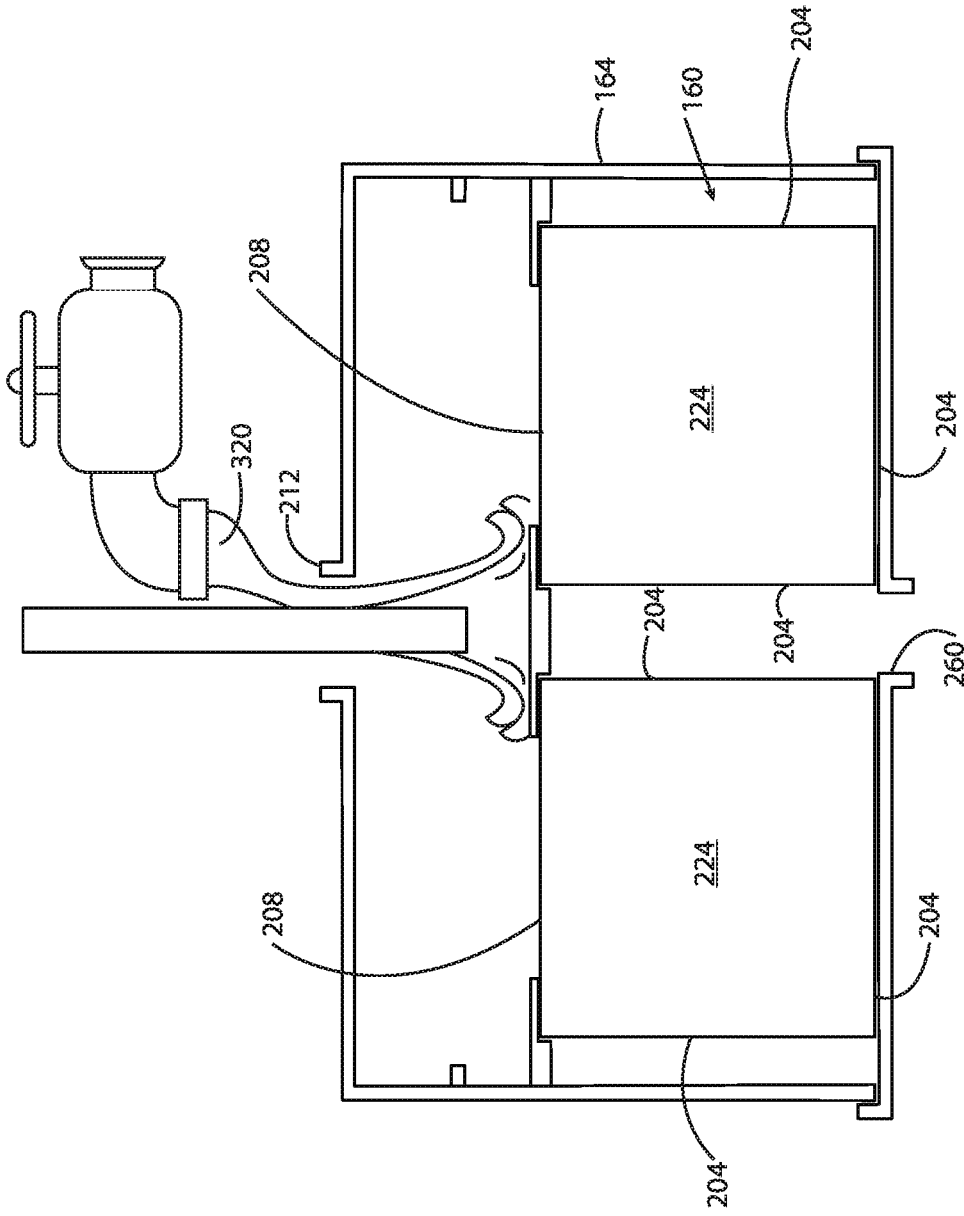


FIG. 12

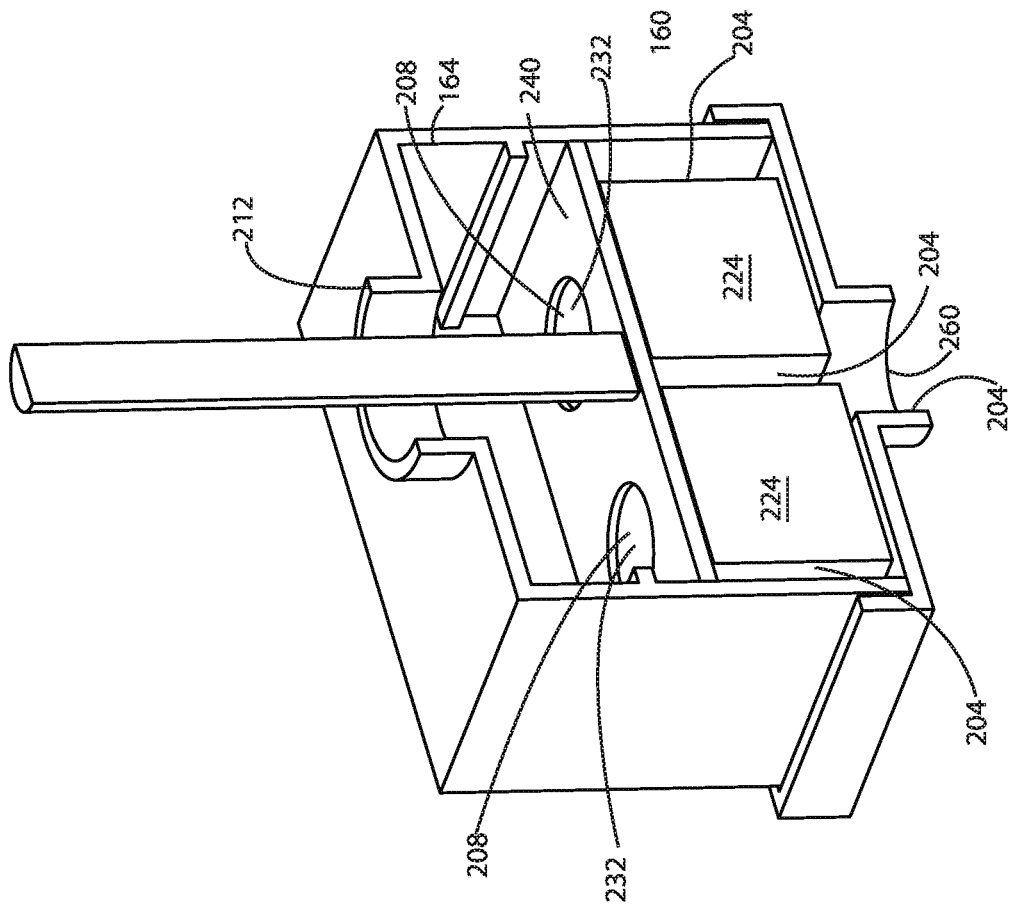


FIG. 13



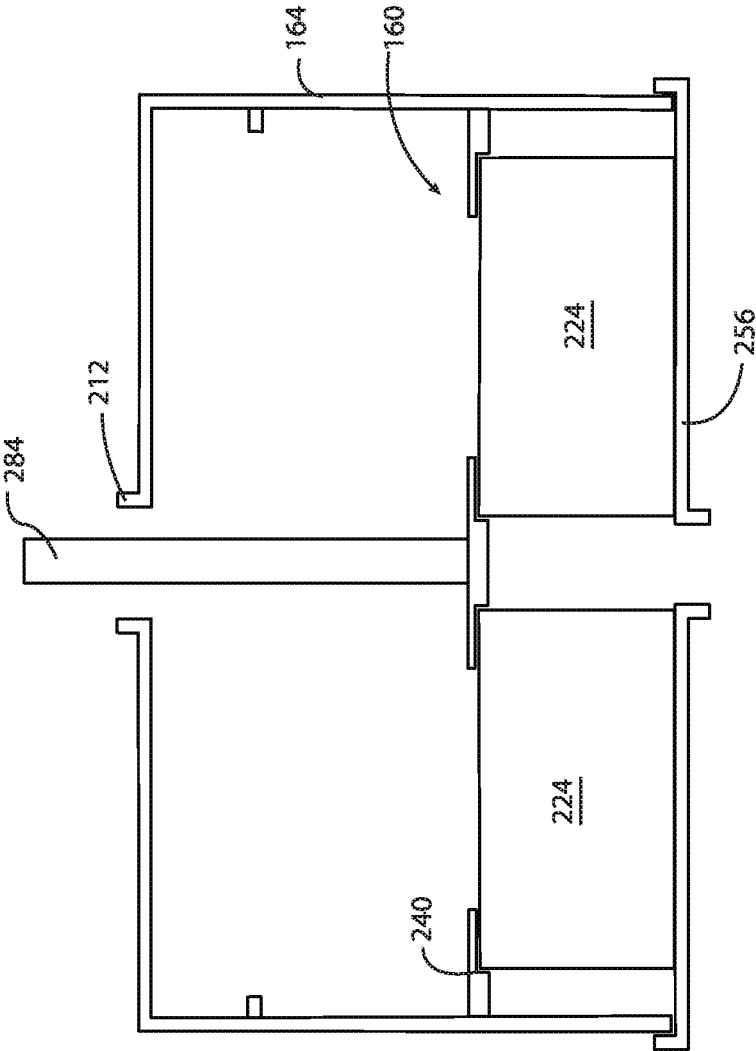


FIG. 14

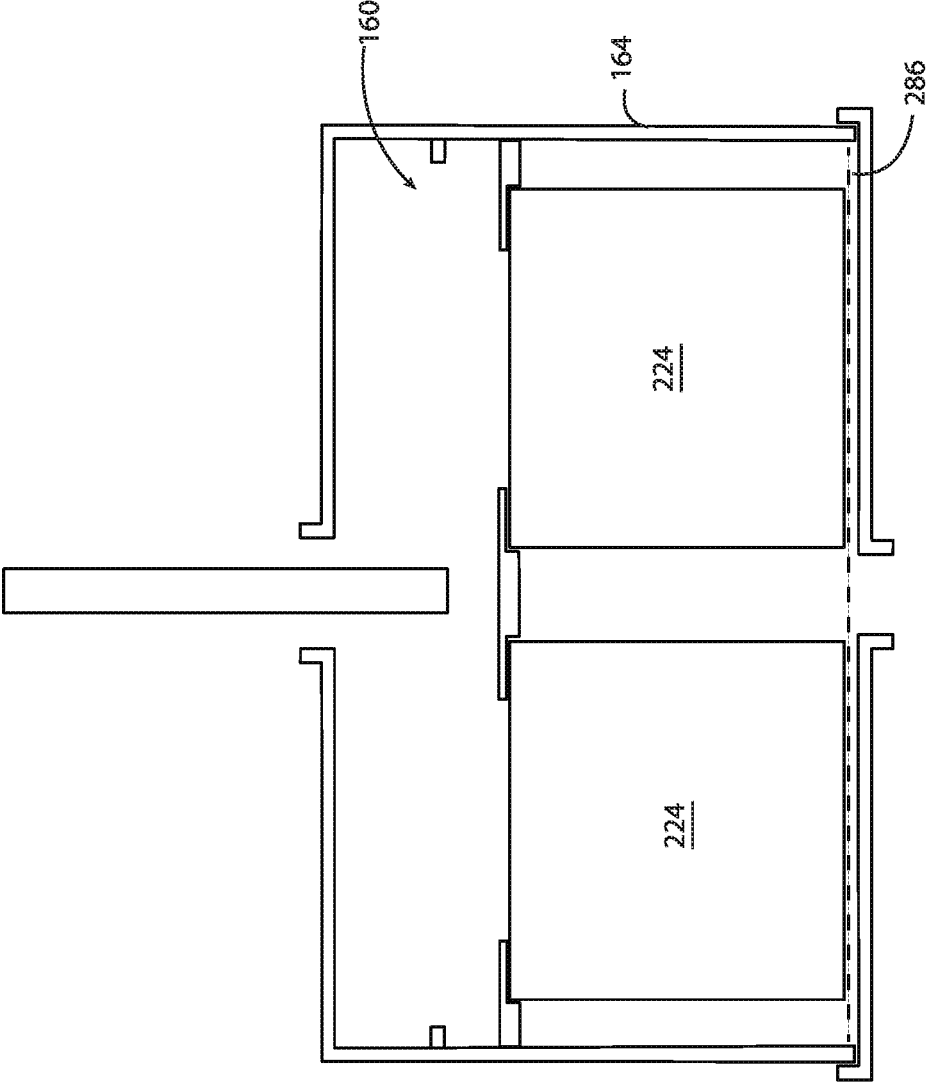


FIG. 15

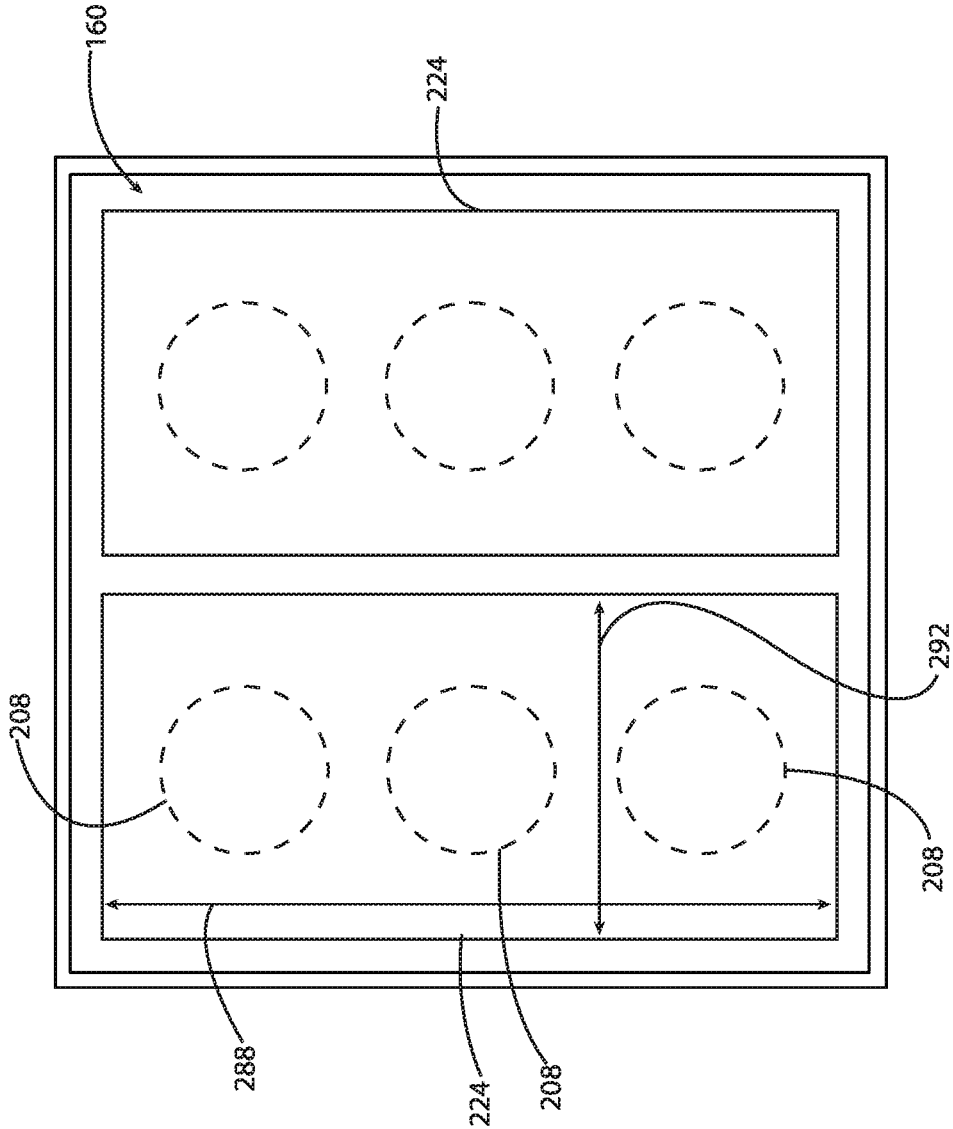


FIG. 16

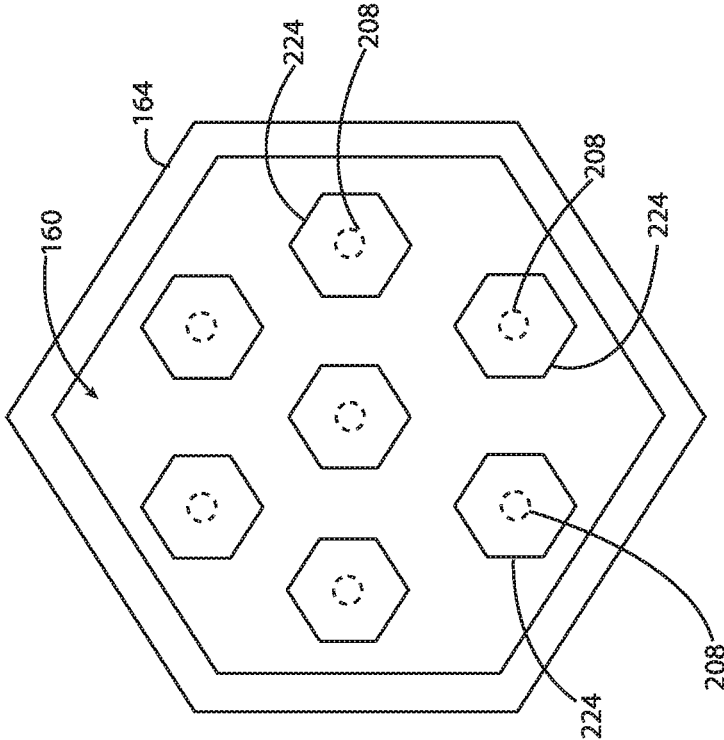


FIG. 17

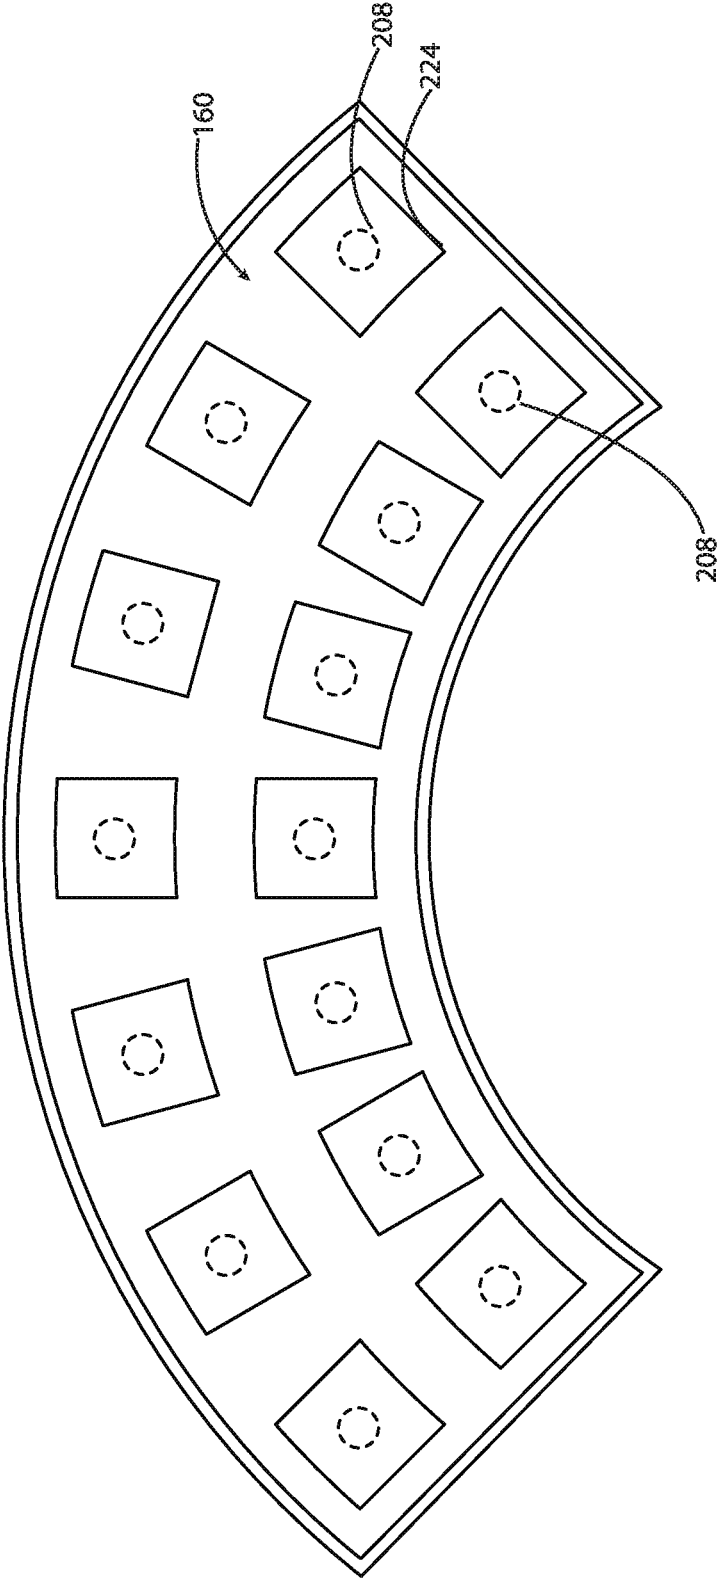


FIG. 18

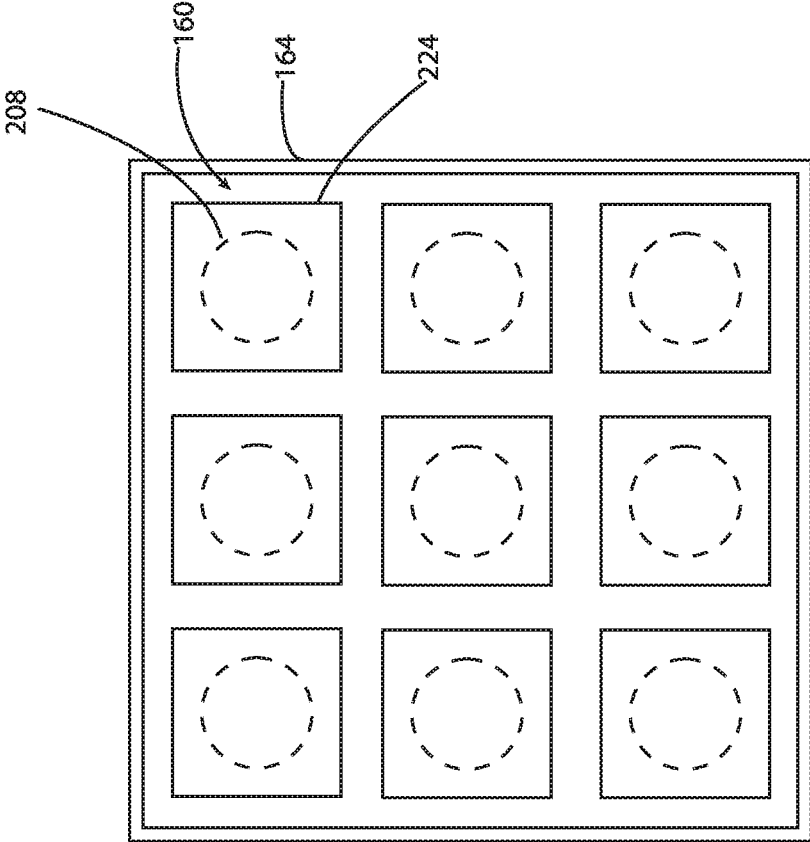


FIG. 19

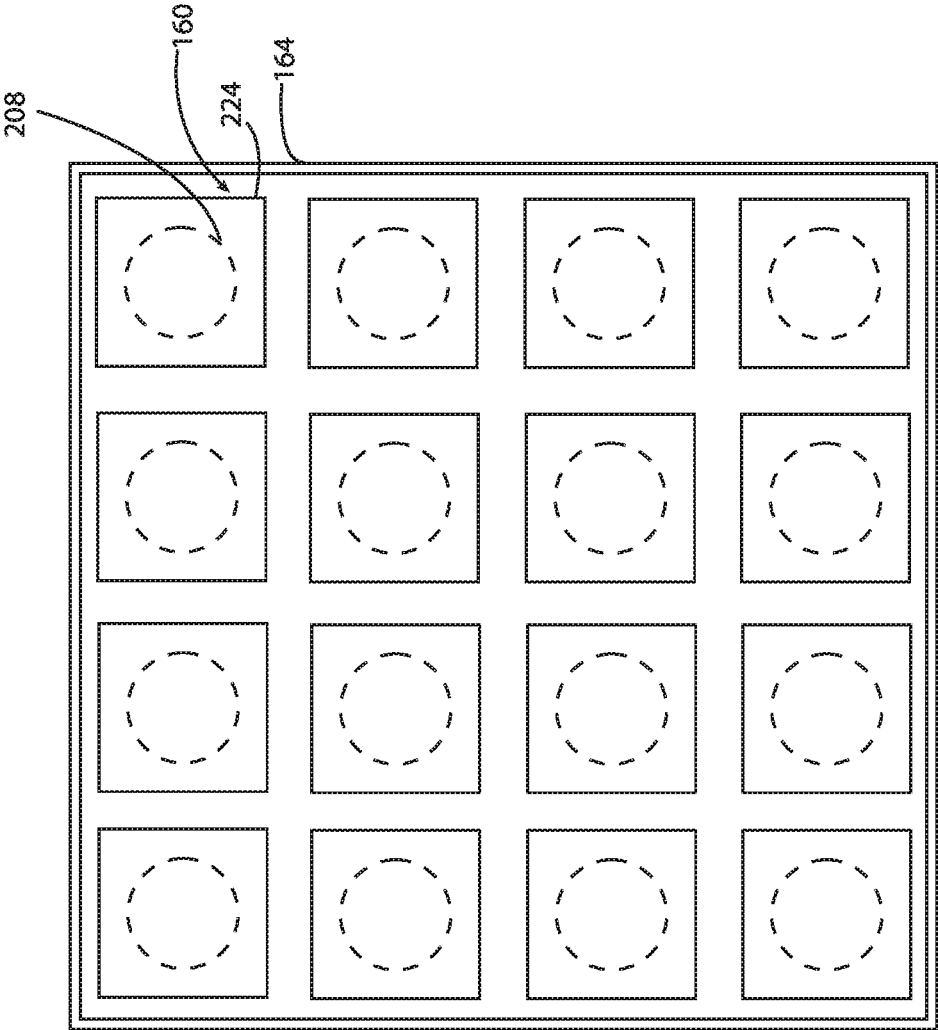


FIG. 20

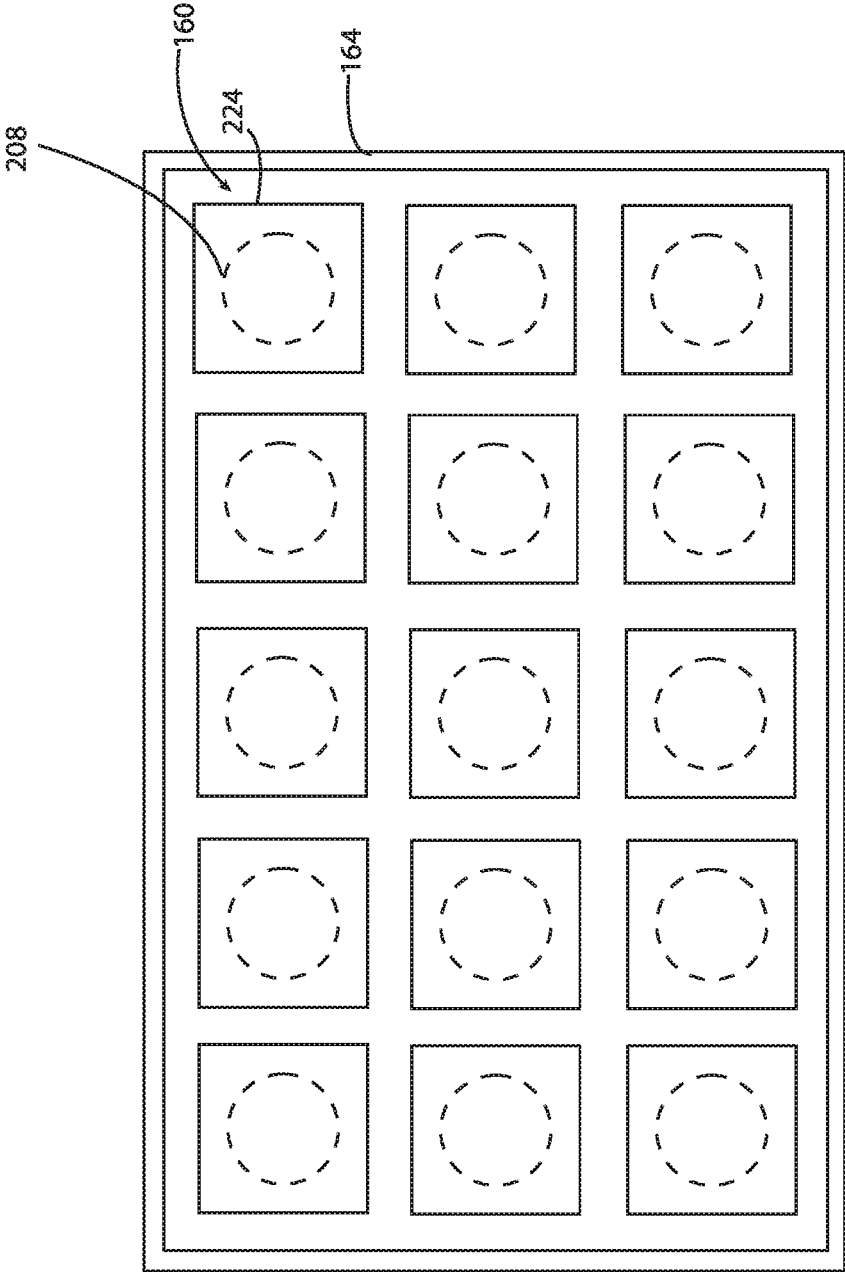


FIG. 21



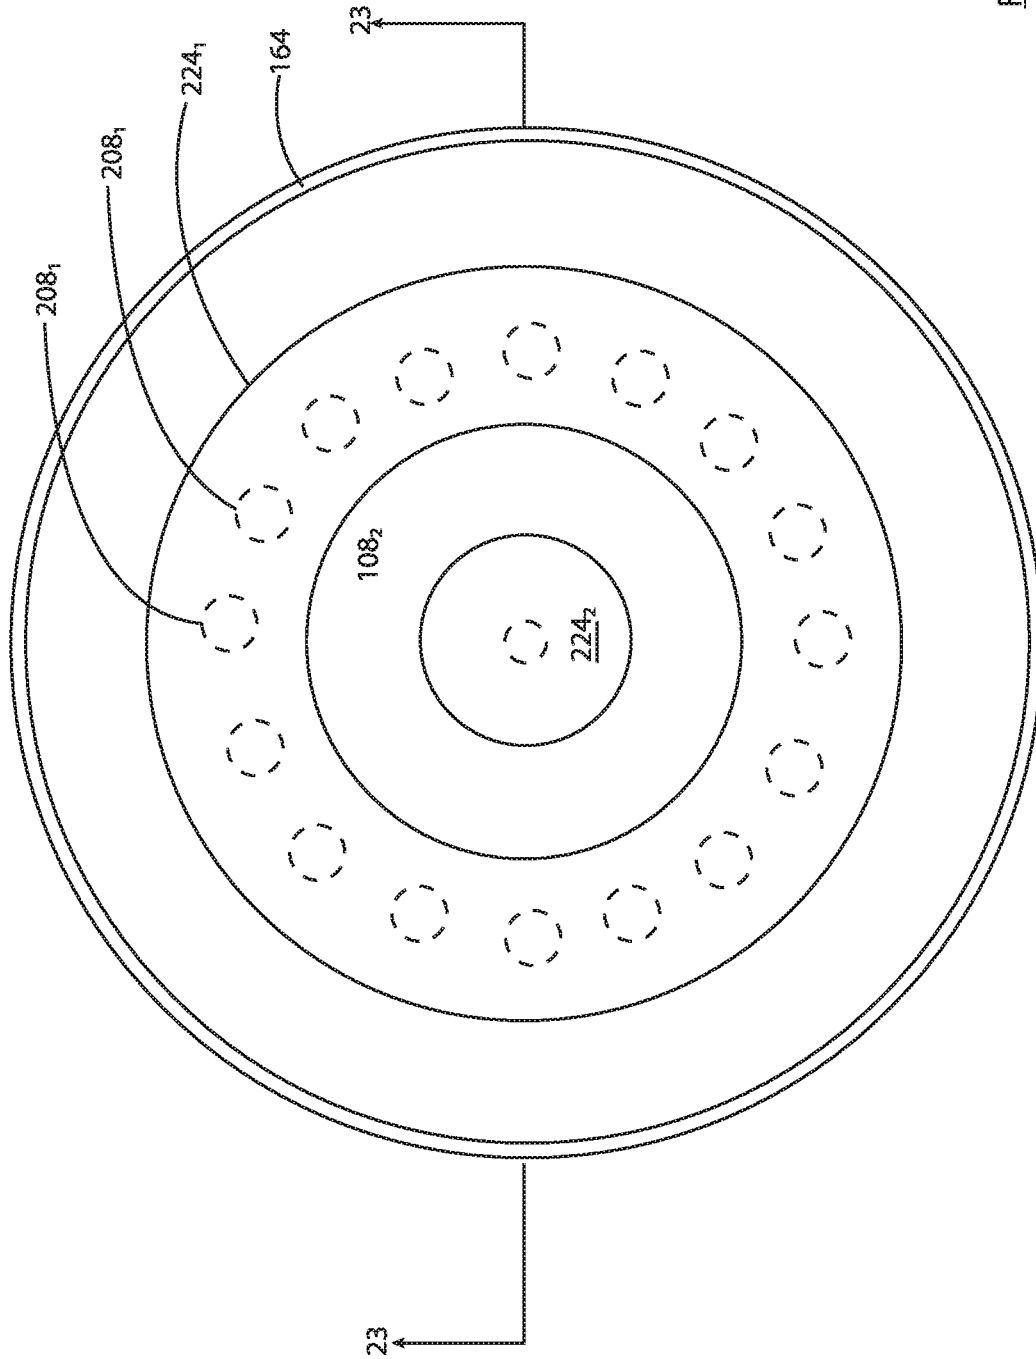


FIG. 22

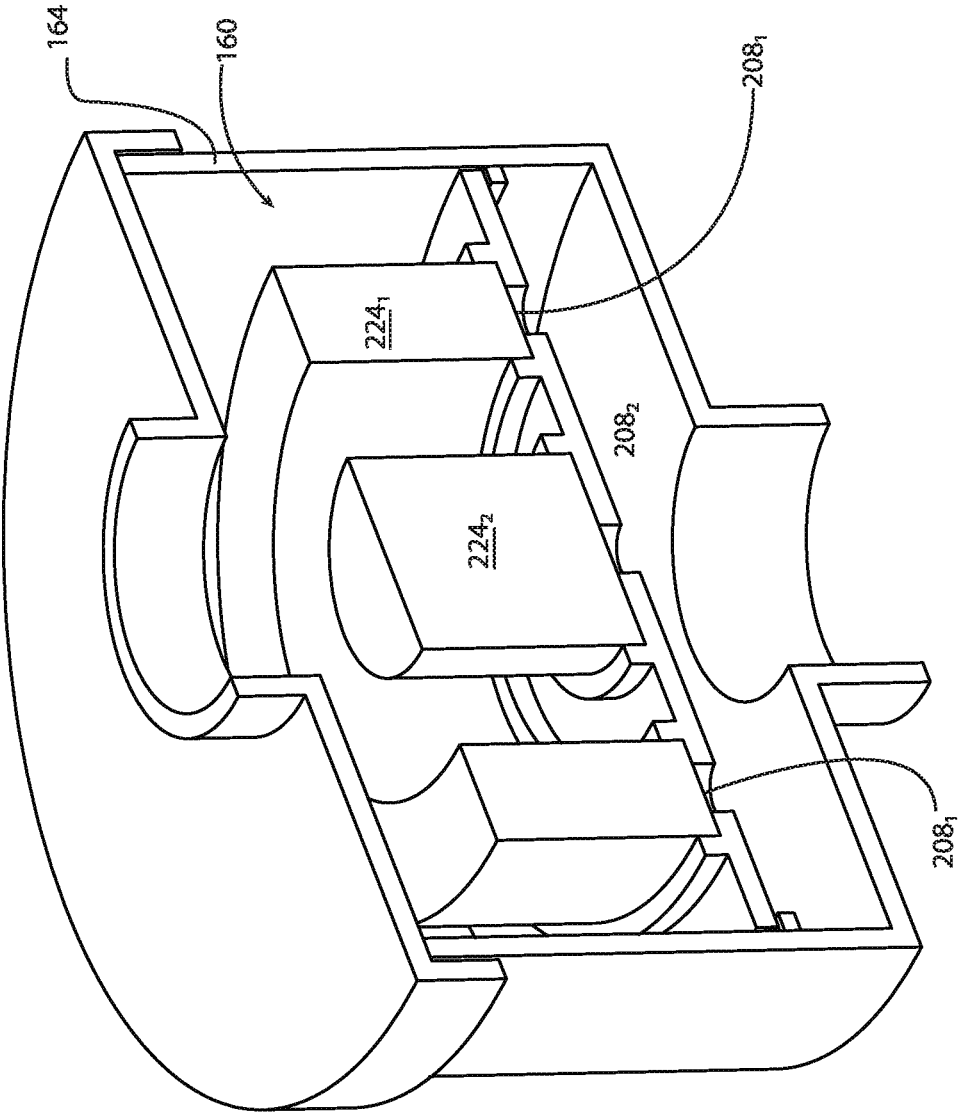


FIG. 23

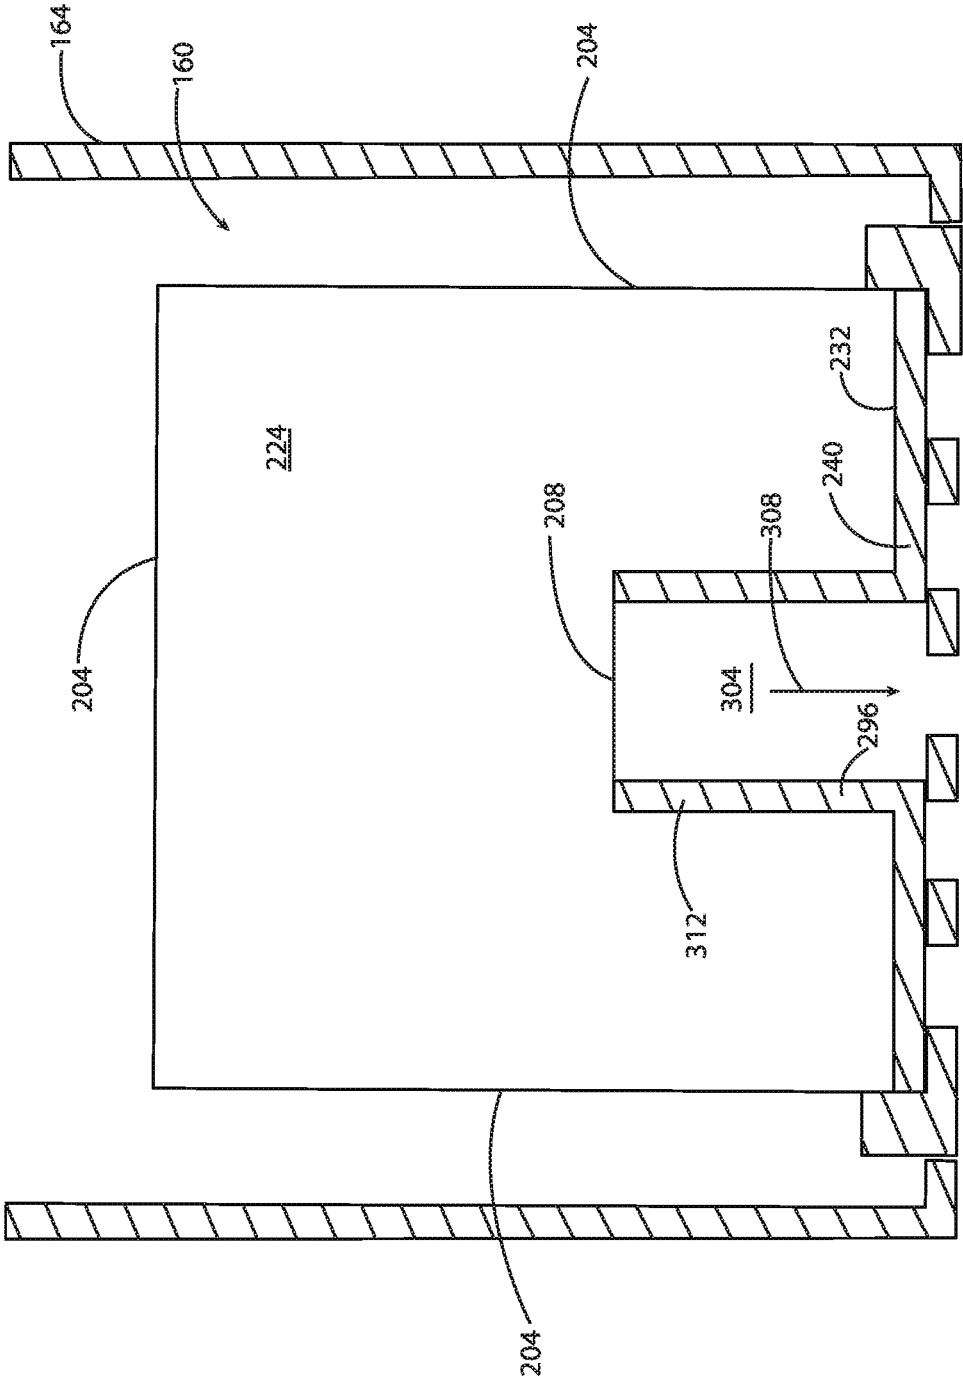


FIG. 24

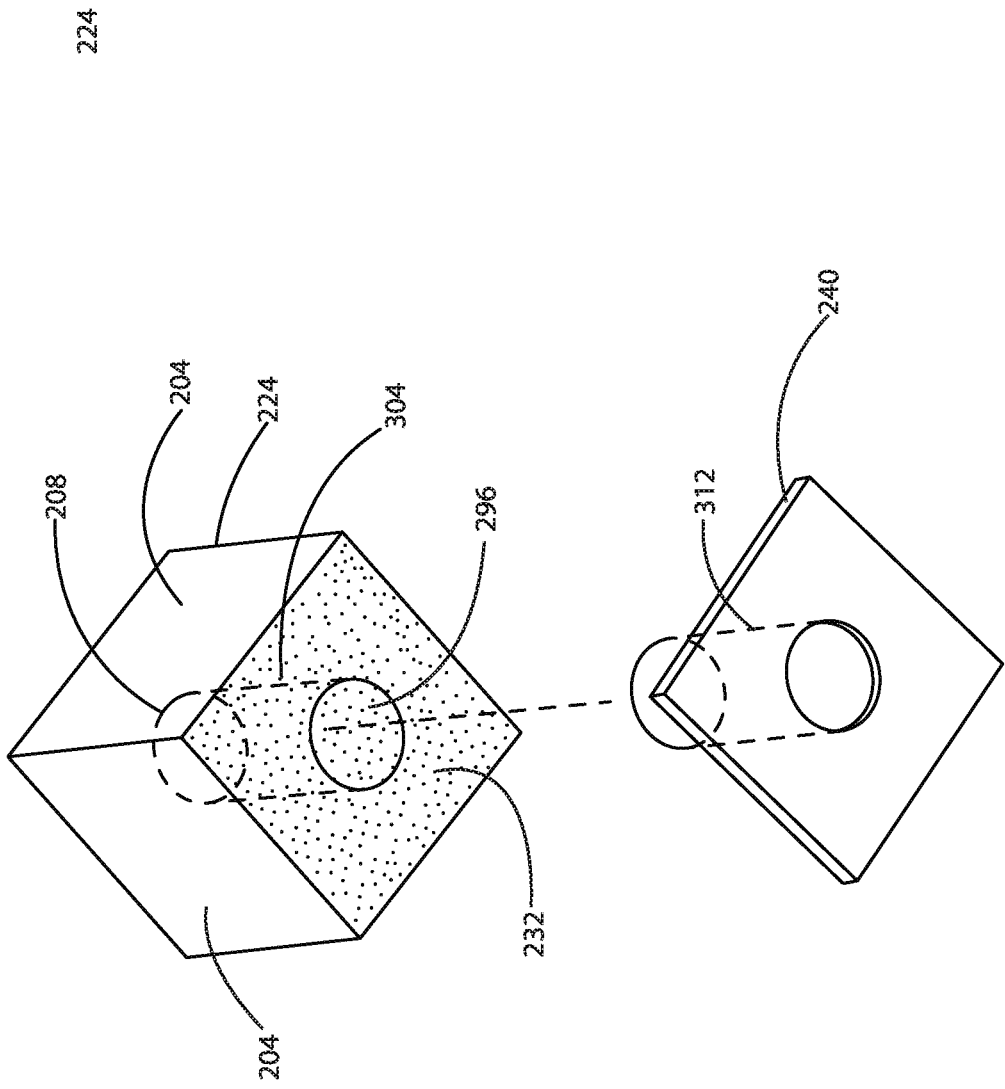


FIG. 25

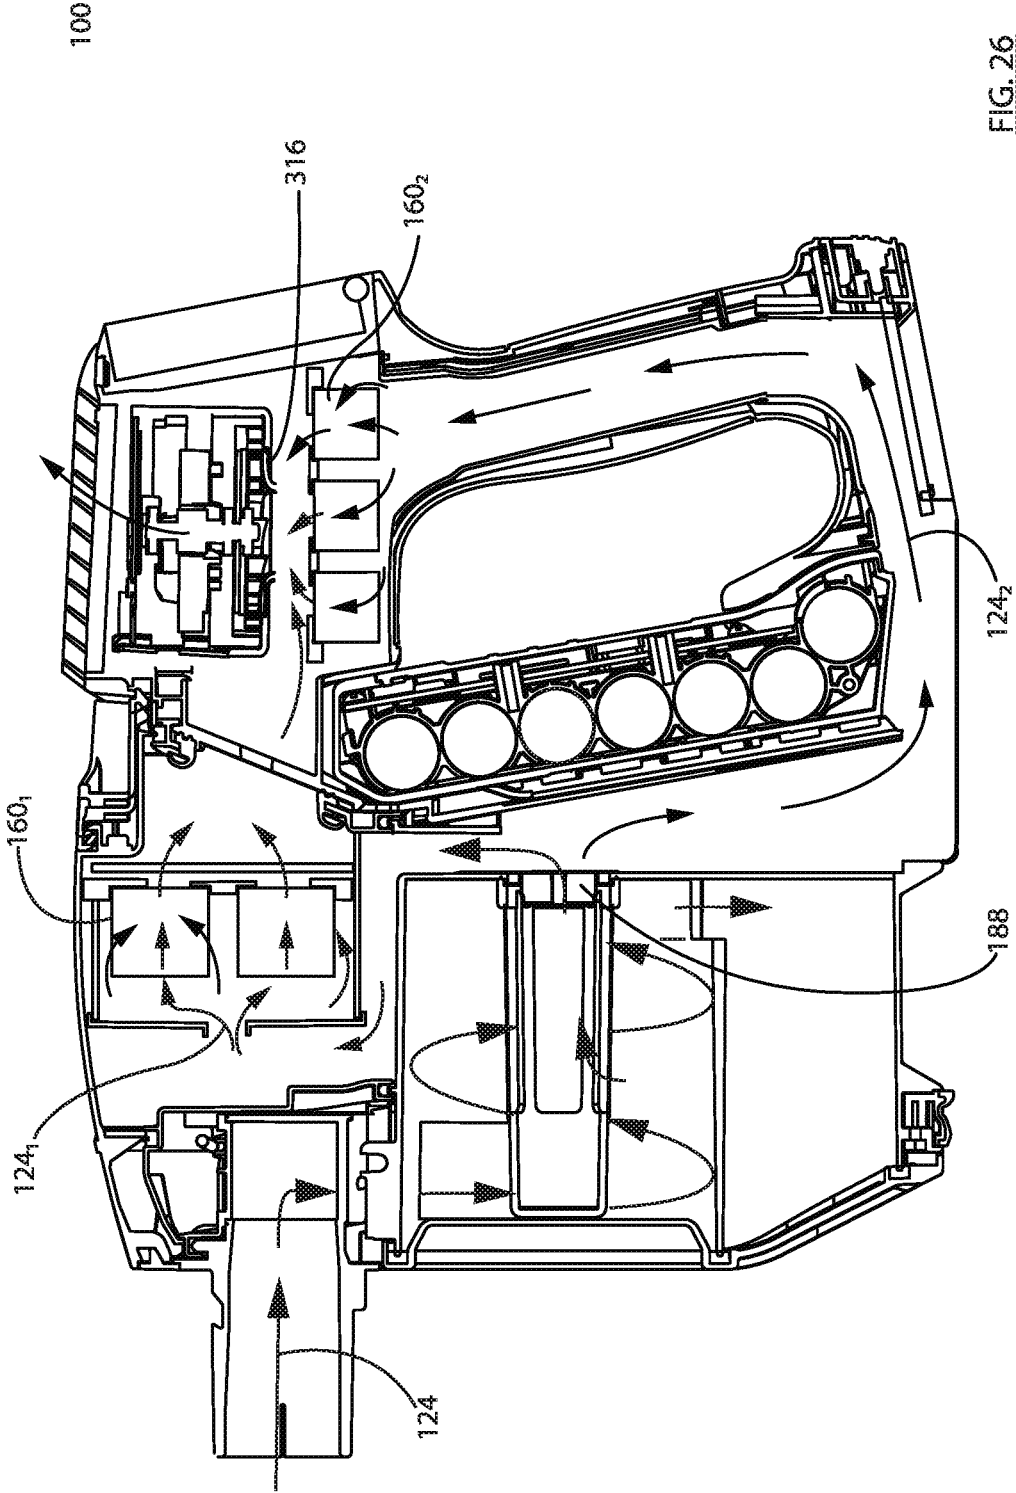


FIG. 26

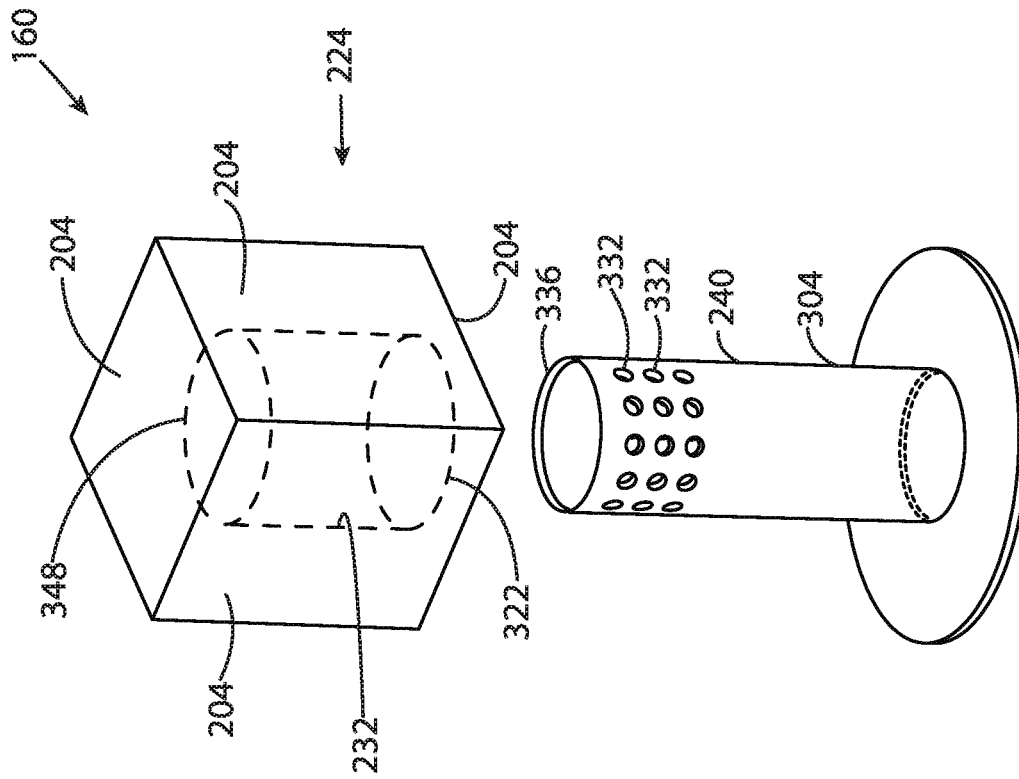


FIG. 27

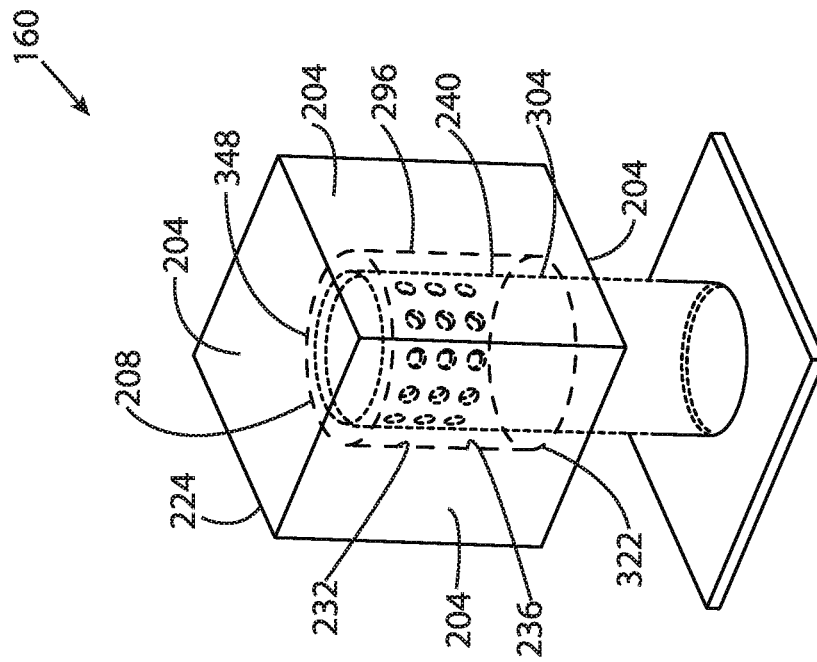


FIG. 28

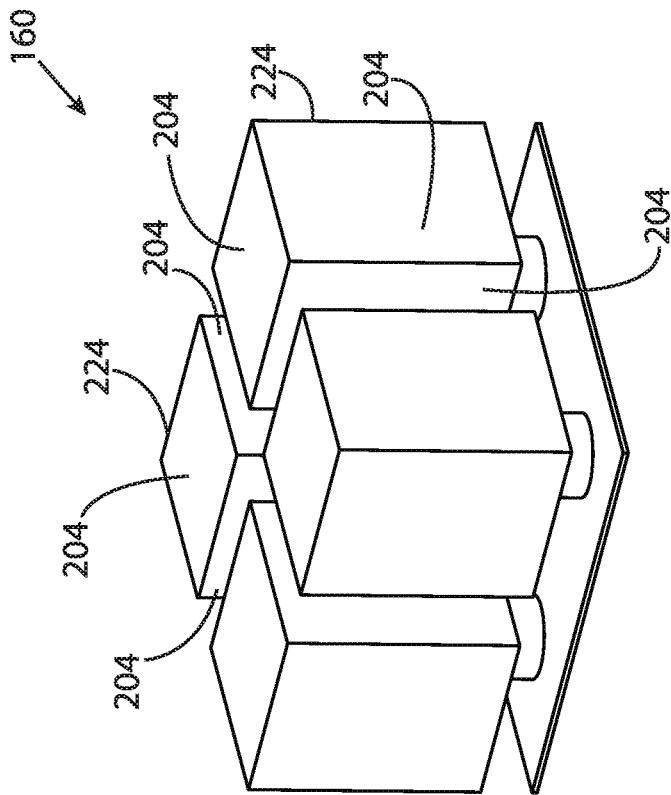
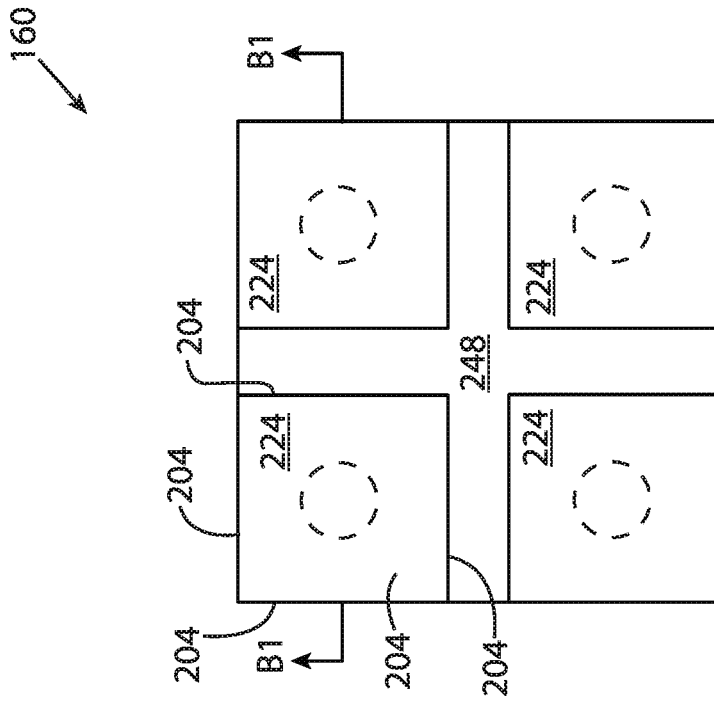


FIG. 30

FIG. 29

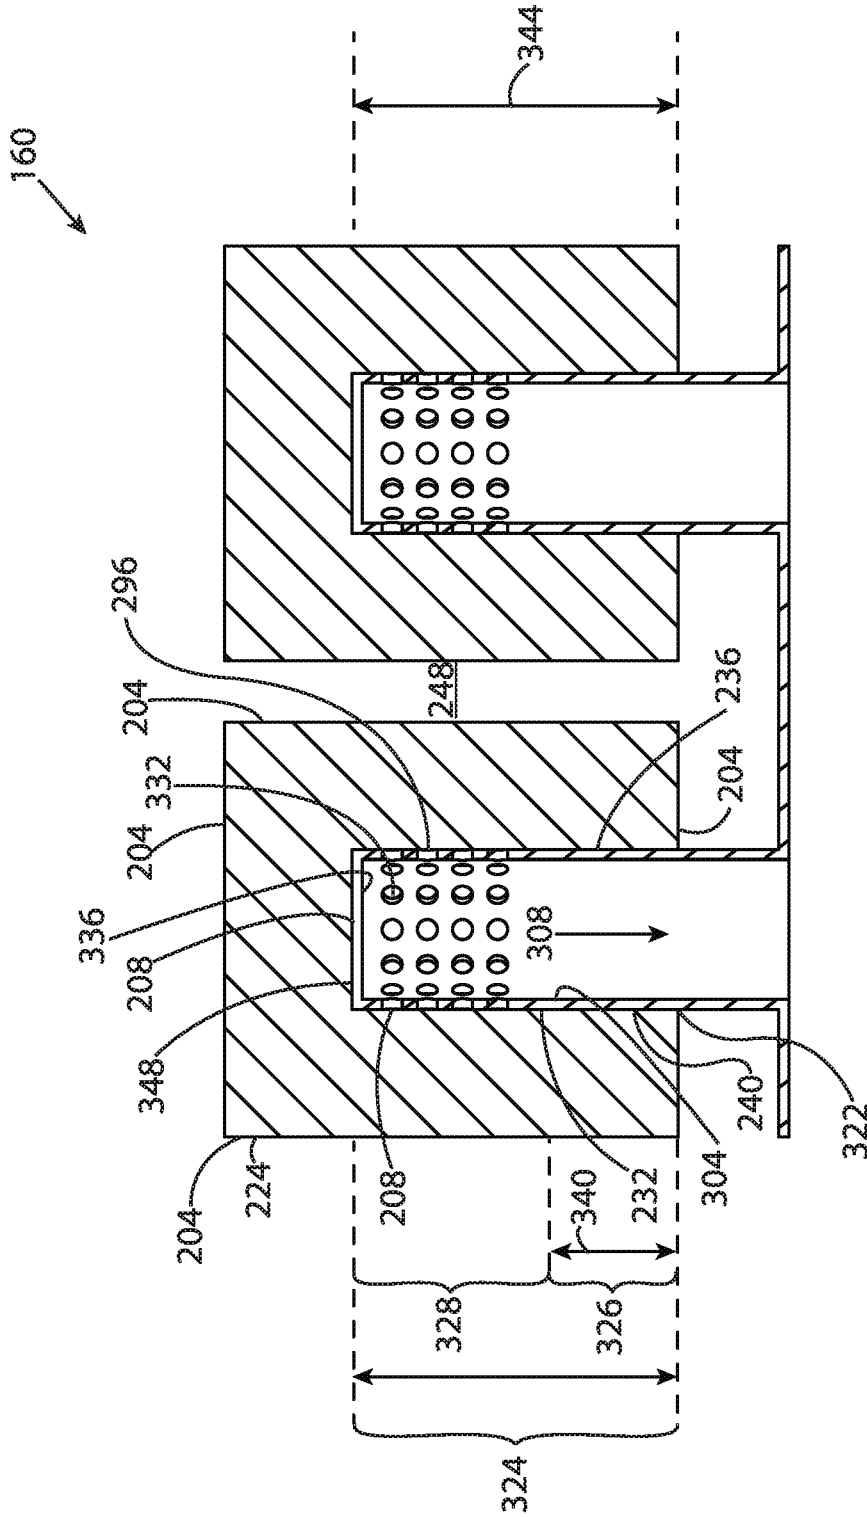


FIG. 31



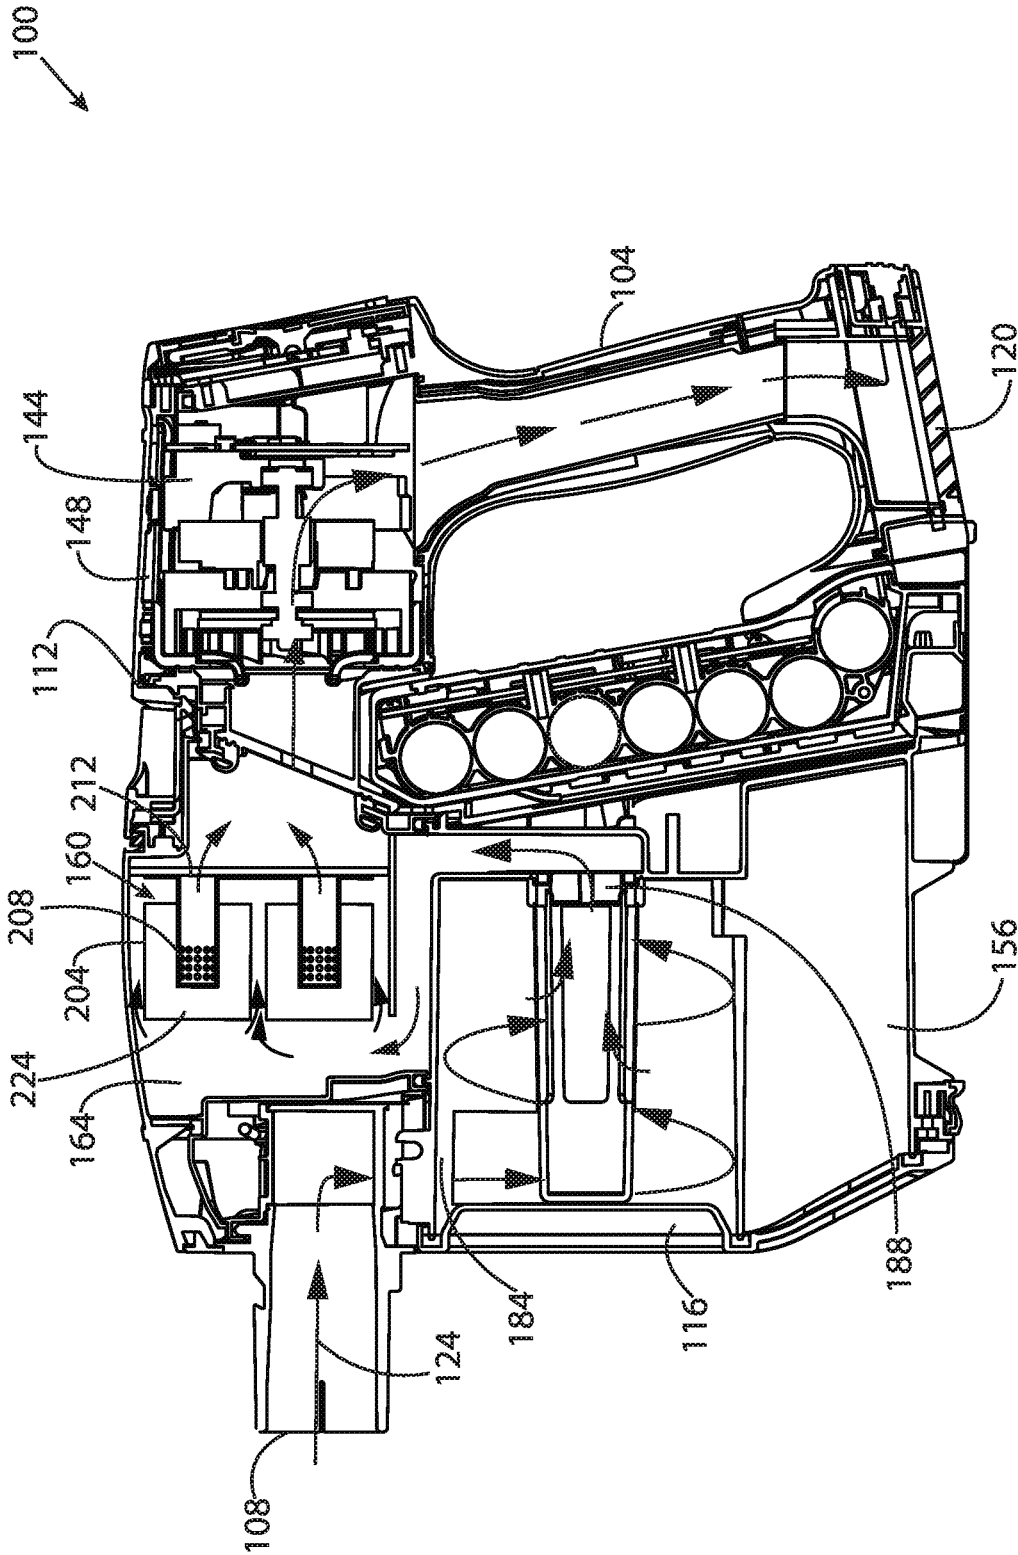


FIG. 32

100

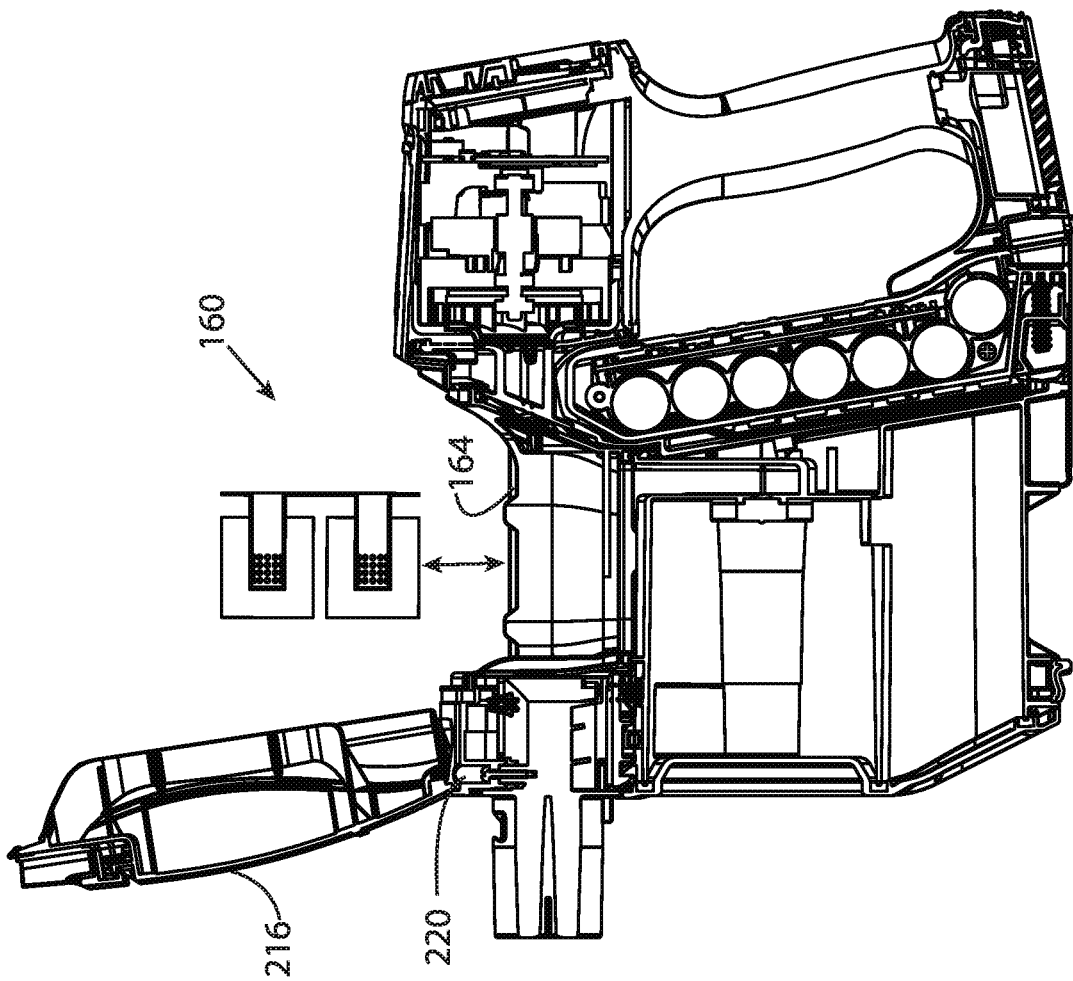


FIG. 33

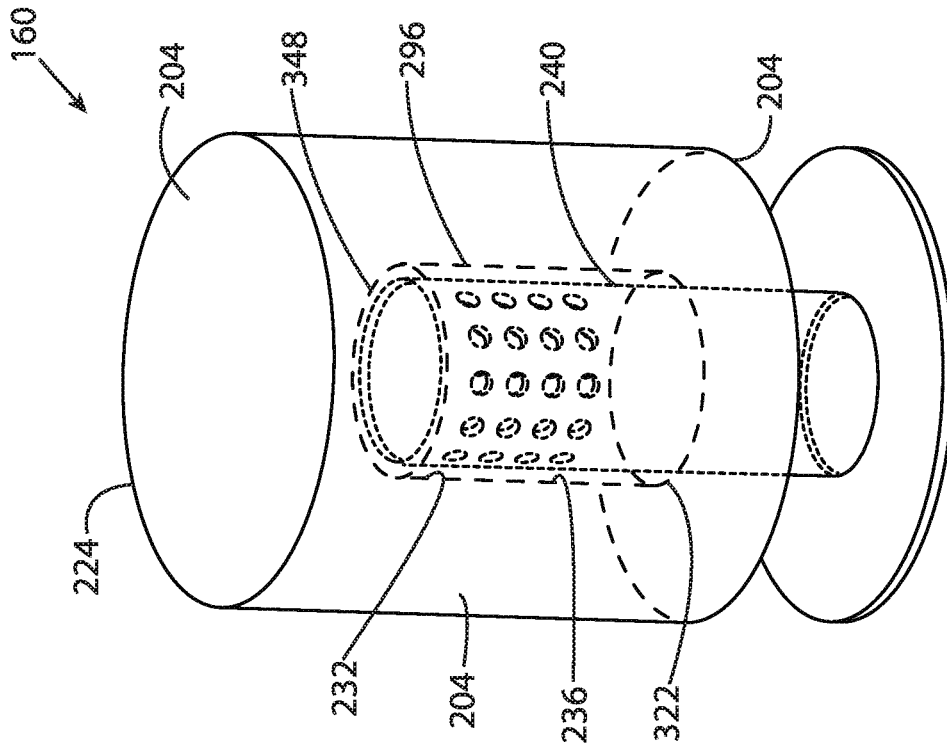
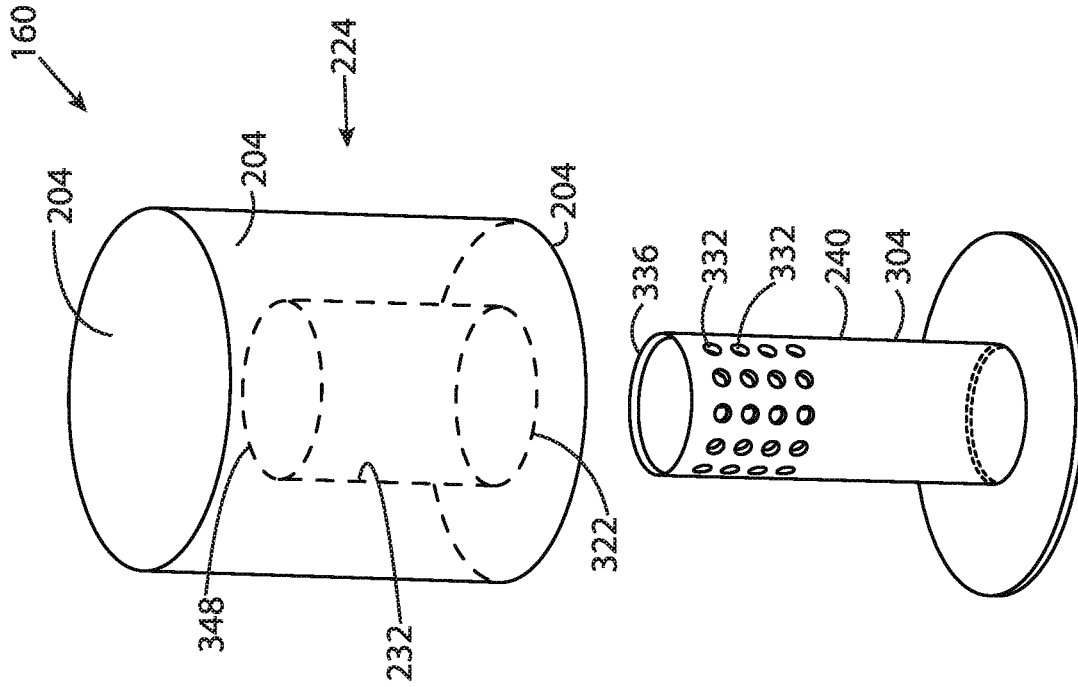


FIG. 34

FIG. 35

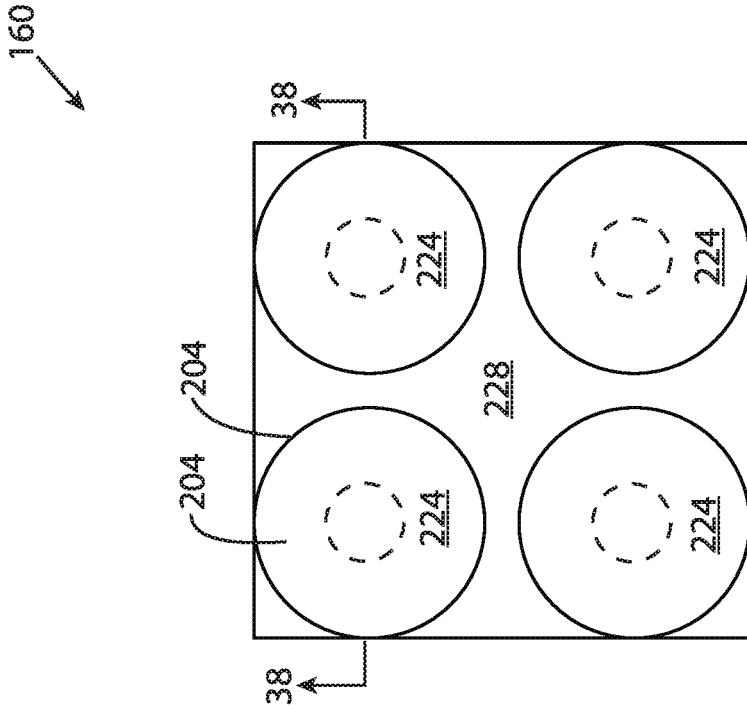


FIG. 37

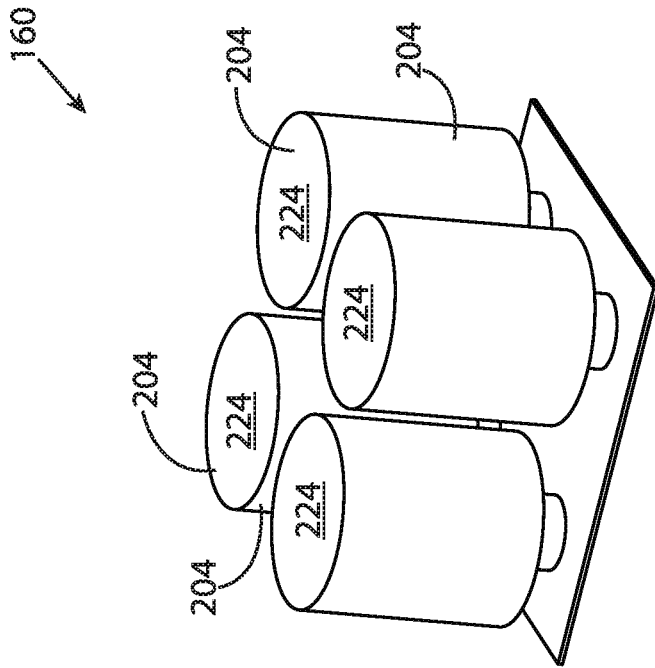


FIG. 36

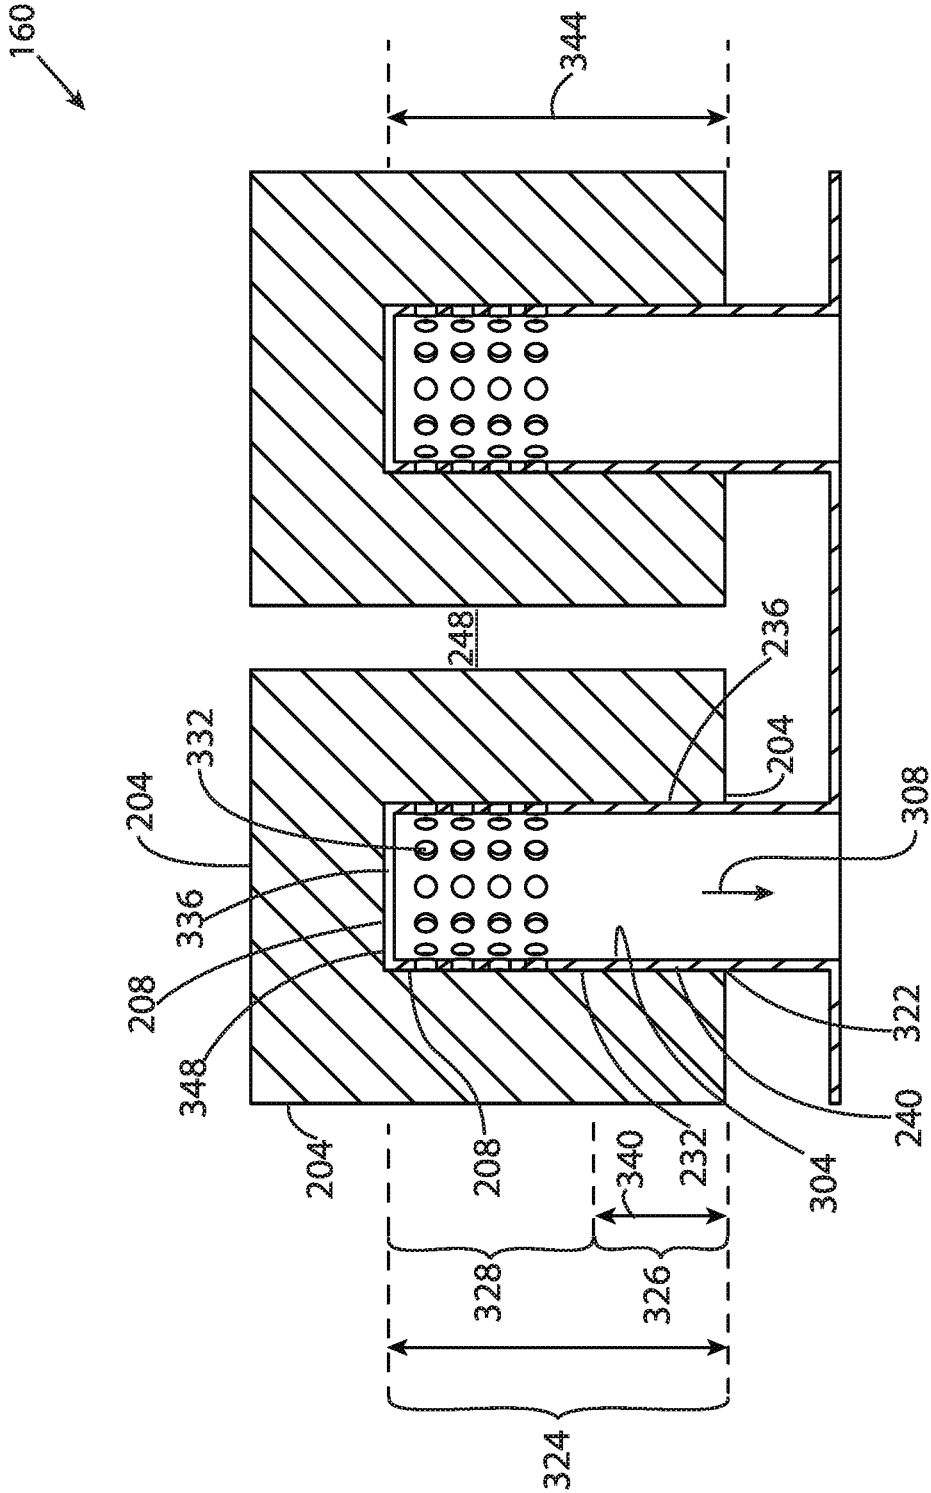


FIG. 38

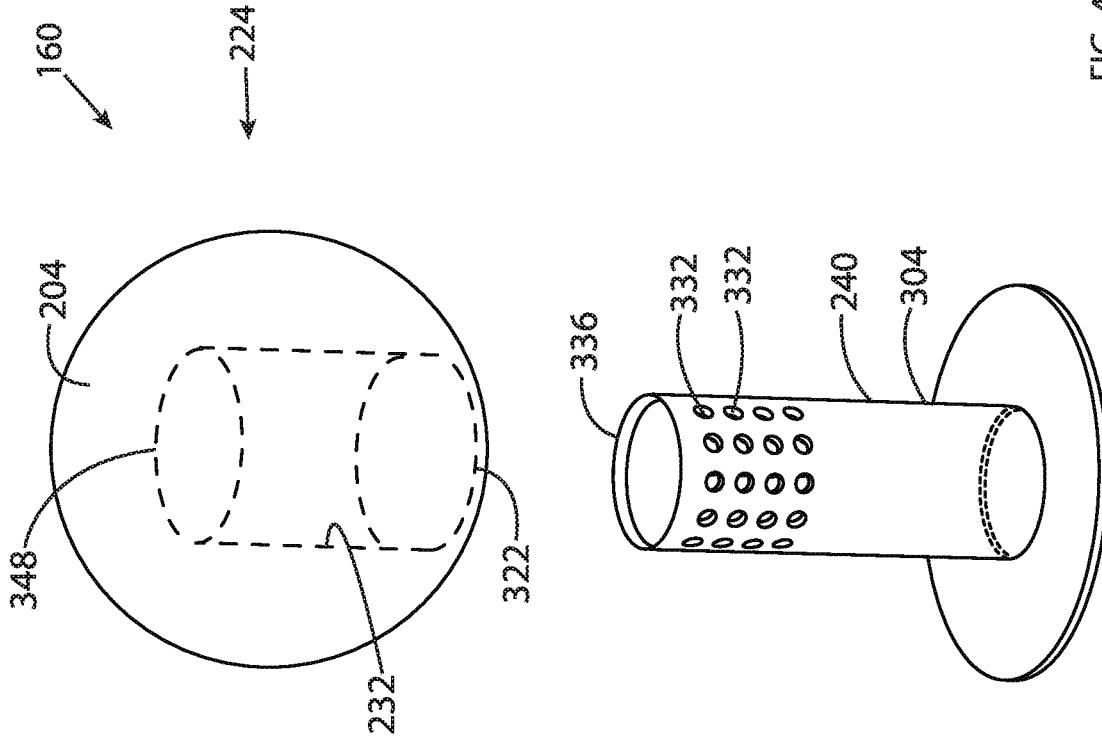


FIG. 39

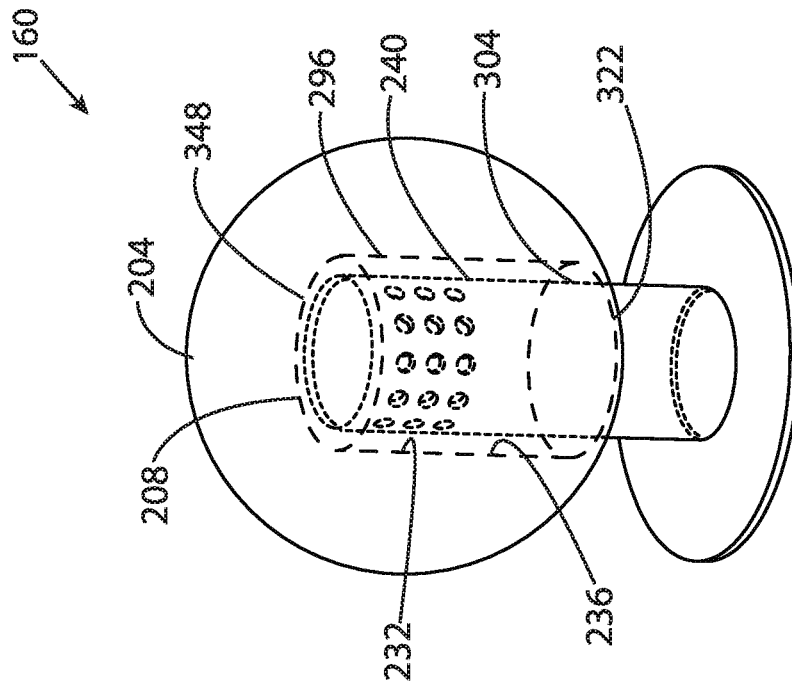


FIG. 40

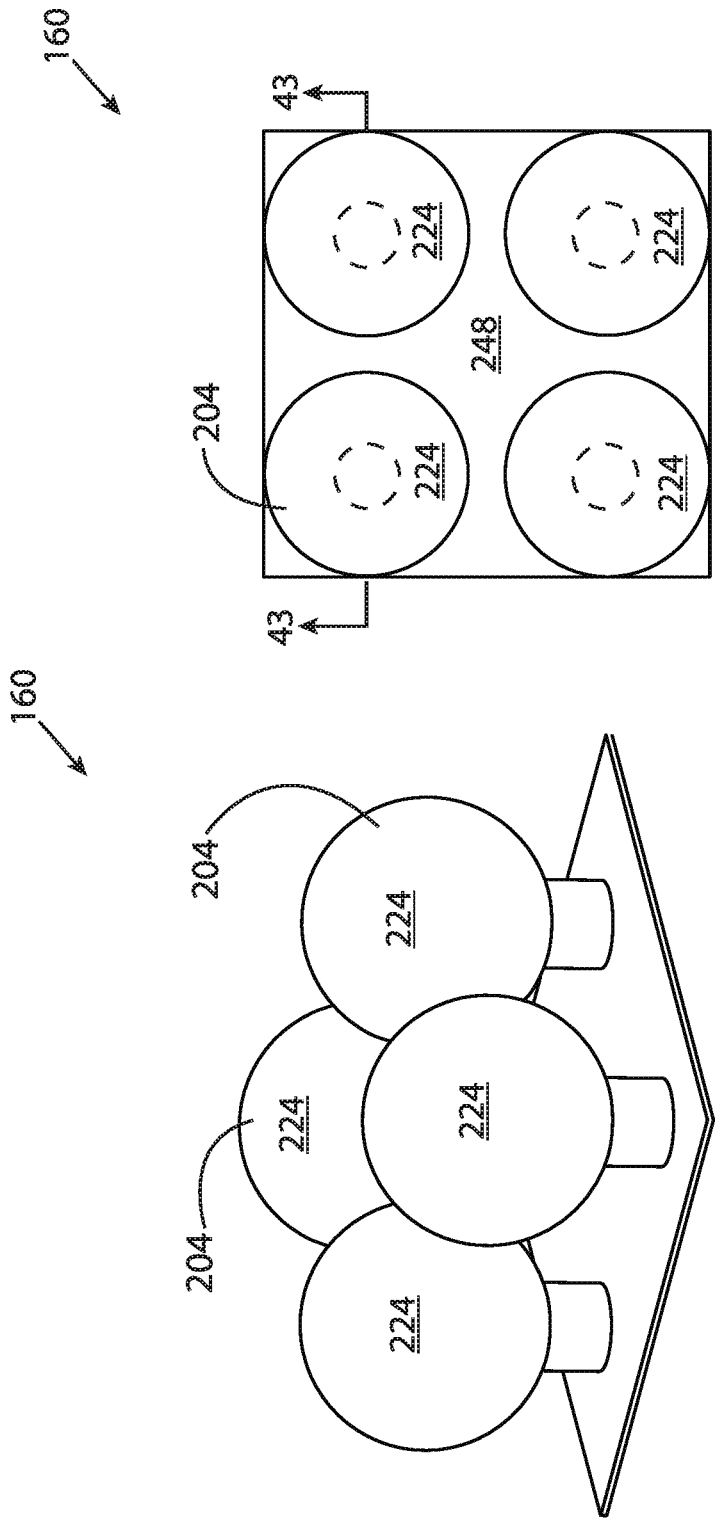


FIG. 42

FIG. 41

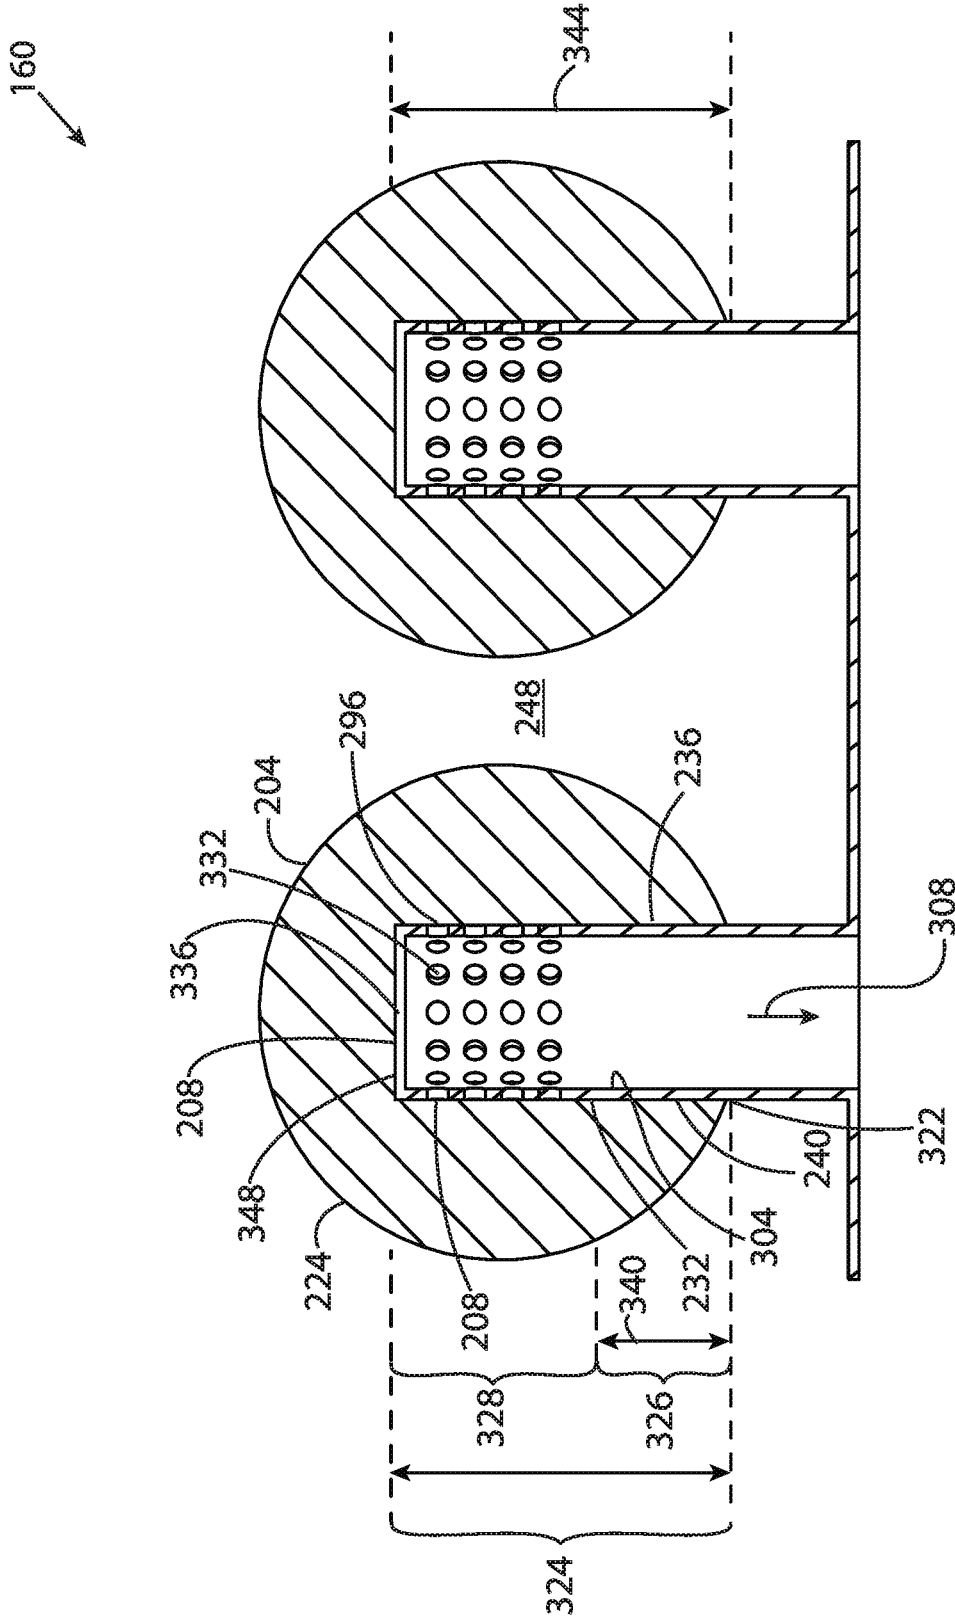


FIG. 43



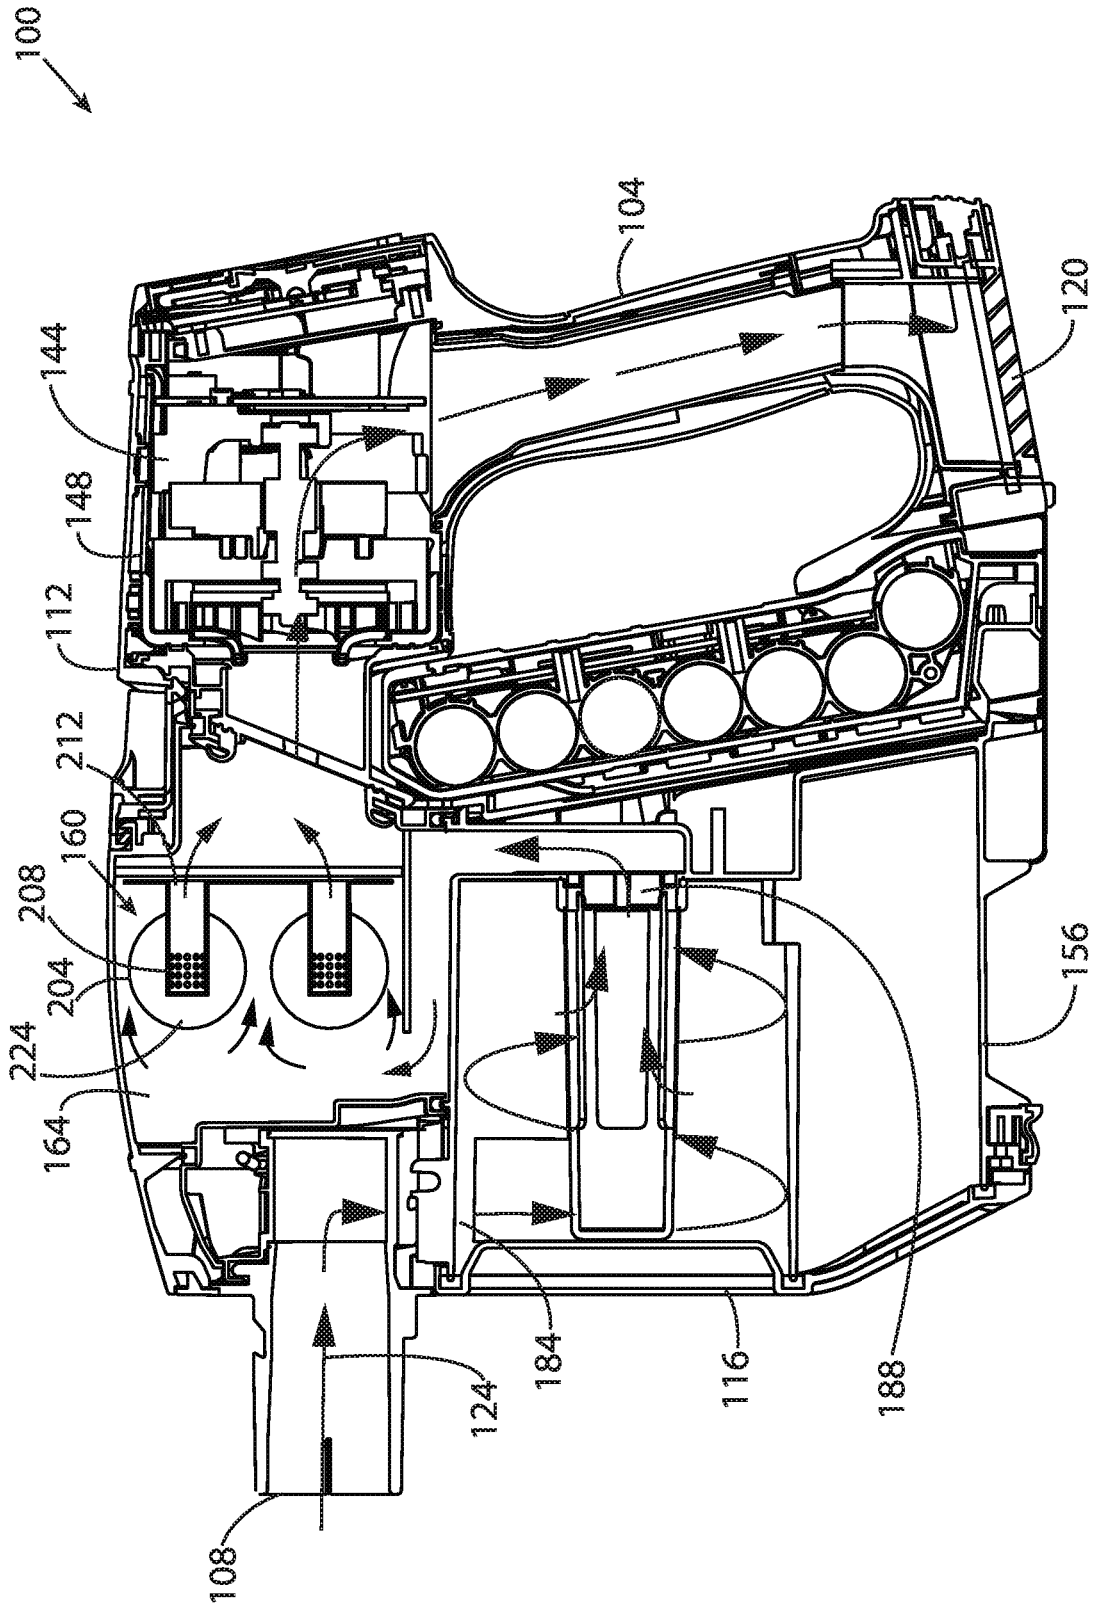


FIG. 44

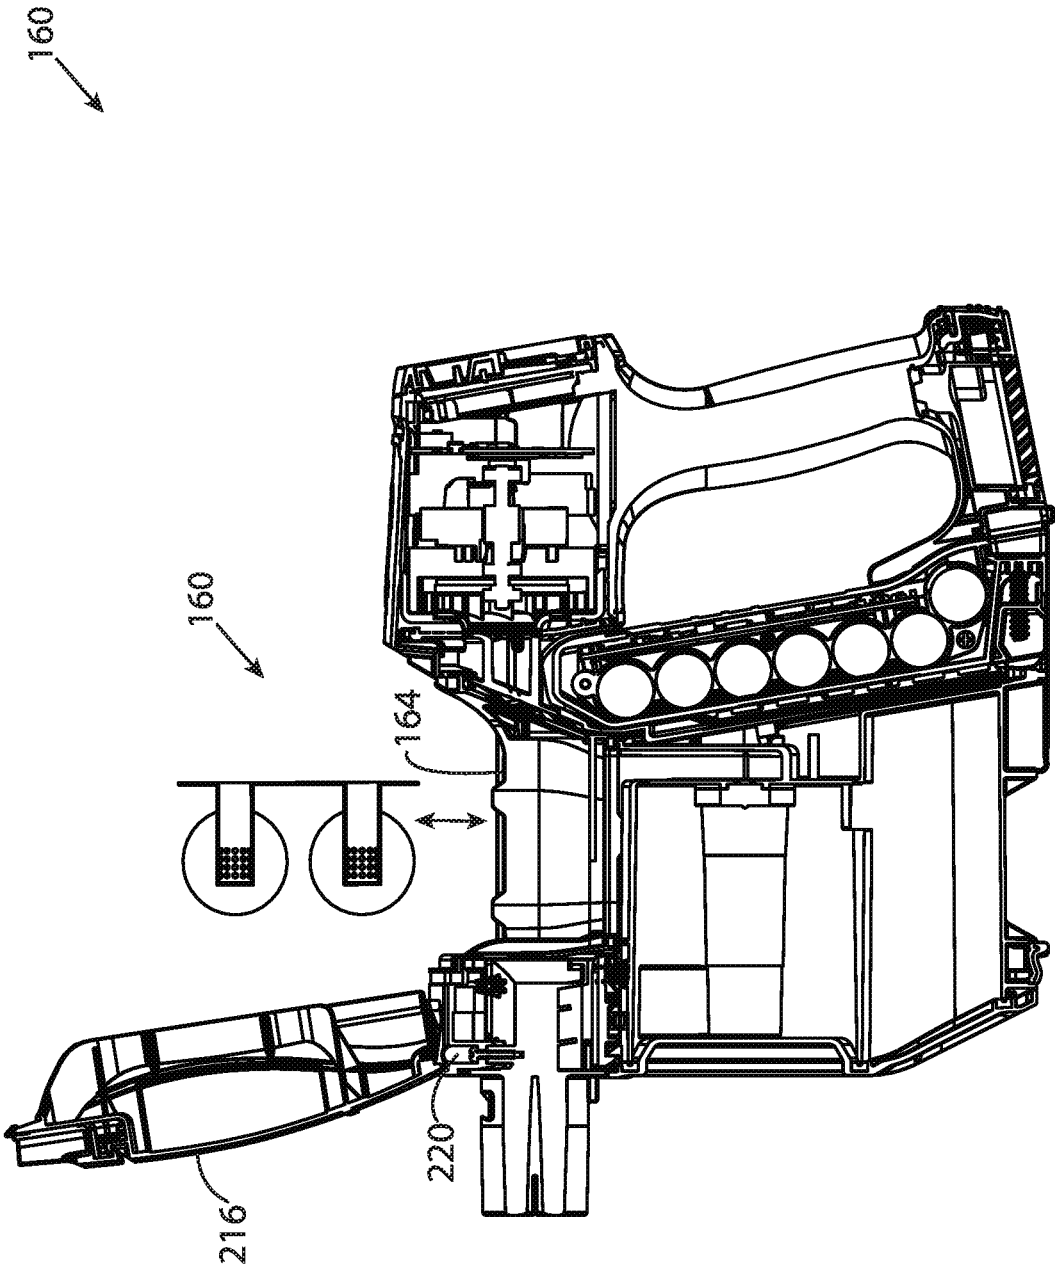


FIG. 45

1

## SURFACE CLEANING APPARATUS

## FIELD

This disclosure relates generally to surface cleaning apparatus.

## INTRODUCTION

The following is not an admission that anything discussed below is part of the prior art or part of the common general knowledge of a person skilled in the art.

Various types of surface cleaning apparatus are known. Such surface cleaning apparatus include vacuum cleaners, including upright vacuum cleaners, hand carryable vacuum cleaners, canister-type vacuum cleaners, extractors and wet/dry type vacuum cleaners (e.g. Shop-Vac™). Some vacuum cleaners include a cyclonic separator (also referred to as a cyclone bin assembly) having a cyclone chamber and a dirt collection chamber. A motor is used to draw air through the surface cleaning apparatus. A filter, such as a pre-motor filter, may be provided in the air flow path through the surface cleaning apparatus.

## SUMMARY

This summary is intended to introduce the reader to the more detailed description that follows and not to limit or define any claimed or as yet unclaimed invention. One or more inventions may reside in any combination or sub-combination of the elements or process steps disclosed in any part of this document including its claims and figures.

In one aspect, a surface cleaning apparatus is provided wherein a filter assembly, which may be a pre-motor filter is provided. The filter assembly comprises a plurality of individual or discrete filter elements, which may be mounted on a common support member. The plurality of individual filter elements are spaced apart such that the side face of at least one individual filter element faces a side face of another individual filter element. The side faces are upstream faces of the filter assembly. An advantage of this design is that the upstream surface area of the filter assembly may be increased without increasing or substantially increasing the volume of the filter assembly.

In accordance with this aspect, there is provided a surface cleaning apparatus having an air flow path, a filter housing, and a filter member. The air flow path extends from a dirty air inlet to a clean air outlet, and an air treatment member and a suction motor are positioned in the air flow path. The filter housing is provided in the air flow path. The filter member is provided in the filter housing. The filter member comprises a plurality of individual filter elements arranged in parallel, each of the individual filter elements comprising porous filter material having at least one upstream face and at least one portion defining a porous filter media air outlet. The at least one upstream face has a larger surface area than the at least one portion. An outside gap is provided between at least some of the upstream faces and opposed facing walls of the filter housing and an inside gap is provided between opposed upstream faces. A cross-sectional area of the outside gaps and the inside gaps, in a plane transverse to a direction of air flow through the outside and inside gaps, is at least as large as a cross-sectional area of an air inlet to the air treatment member in a plane transverse to a direction of air flow through the air inlet to the air treatment member.

In some embodiments, the at least one portion may be provided on a single downstream face.

2

In some embodiments, only a portion of the single downstream face may be porous.

In some embodiments, an air impermeable material may be provided on a portion of the single downstream face.

In some embodiments, the at least one portion may be provided on the interior of the porous filter media and the porous filter media may have an air outlet passage extending in an air flow direction, the air outlet passage having a sidewall extending in the air flow direction and at least a portion of the air outlet passage being air impermeable.

In some embodiments, an air impermeable material may be provided on at least a portion of the sidewall of the air outlet passage.

In some embodiments, the air impermeable material may include a conduit inserted into the air outlet passage.

In some embodiments, an air impermeable material may be provided on a part of the porous filter media surrounding the porous filter media air outlet.

In some embodiments, at least some of the filter elements may have a plurality of upstream faces.

In some embodiments, at least some of the individual filter elements may be generally polyhedron in shape.

In some embodiments, at least some of the individual filter elements may be generally annular in transverse section and may be at least partially nested inside each other.

In accordance with this aspect, there is also provided a surface cleaning apparatus. The surface cleaning apparatus includes an air flow path and an individual filter element. The air flow path extends from a dirty air inlet to a clean air outlet. An air treatment member and a suction motor are positioned in the air flow path. The individual filter element includes a porous filter material having at a plurality of upstream faces and at least one portion defining a porous filter media air outlet. The at least one upstream face has a larger surface area than the at least one portion.

In some embodiments, the at least one portion may be provided on a single downstream face.

In some embodiments, only a portion of the single downstream face may be porous.

In some embodiments, an air impermeable material may be provided on a portion of the single downstream face.

In some embodiments, the at least one portion may be provided on the interior of the porous filter media and the porous filter media may have an air outlet passage extending in an air flow direction, the air outlet passage having a sidewall extending in the air flow direction and at least a portion of the air outlet passage being air impermeable.

In some embodiments, an air impermeable material may be provided on at least a portion of the sidewall of the air outlet passage.

In some embodiments, the air impermeable material may include a conduit inserted into the air outlet passage.

In accordance with another aspect, a filter for a surface cleaning apparatus, such as a pre-motor filter, may be subdivided into two or more sub-assemblies wherein each sub assembly comprises a plurality of individual or discrete filter elements, which may be mounted on a common support member.

In accordance with this aspect, there is provided a surface cleaning apparatus having an air flow path, a first filter part, and a second filter part. The air flow path extends from a dirty air inlet to a clean air outlet. An air treatment member and a suction motor are positioned in the air flow path. The first filter part includes a first plurality of individual filter elements in parallel and is located at a first location in the surface cleaning apparatus. The second filter part includes a second plurality of individual filter elements in parallel and

3

is located at a second location in the surface cleaning apparatus. Each of the individual filter elements includes porous filter material having at least one upstream face and at least one portion defining a porous filter media air outlet. The at least one upstream face has a larger surface area than the at least one portion.

In some embodiments, at least some of the individual filter elements may be generally polyhedron in shape.

## DRAWINGS

FIG. 1 is a perspective view of a surface cleaning apparatus in accordance with an embodiment;

FIG. 2 is a cross-sectional view taken along line 2-2 in FIG. 1;

FIG. 3 is the cross-sectional view of FIG. 2, with a filter housing opened and a filter member, which comprises a plurality of individual filter elements, removed, in accordance with an embodiment;

FIG. 4 is a top perspective view of a filtration assembly including a filter member in a filter housing;

FIG. 5A is a bottom perspective view of a filter element of the filter member of FIG. 4;

FIG. 5B is an exploded view of the filter element of FIG. 5A;

FIG. 6 is a top plan view of the filtration assembly of FIG. 4;

FIG. 7 is a cross-sectional view taken along line 7-7 in FIG. 4, in accordance with an embodiment;

FIG. 8 is a cross-sectional view of a filtration assembly in accordance with another embodiment;

FIG. 9 is a cross-sectional view of a filtration assembly in accordance with another embodiment;

FIG. 10 is a cross-sectional view of a filtration assembly in accordance with another embodiment;

FIG. 11 is an exploded view of the filtration assembly of FIG. 8;

FIG. 12 is a cross-sectional view of the filtration assembly of FIG. 8 and a plunger, with the filtration assembly inverted;

FIG. 13 is a cross-sectional perspective view of the filtration assembly and plunger of FIG. 12;

FIG. 14 is the cross-sectional perspective view of FIG. 13 showing a filter member compressed by the plunger;

FIG. 15 is a cross-sectional view of a filtration assembly having a screen, and a plunger, with the filtration assembly inverted, in accordance with another embodiment;

FIGS. 16-22 are top plan views of filtration assemblies in accordance with various embodiments;

FIG. 23 is a perspective view of a cross-section taken along line 23-23 in FIG. 22,

FIG. 24 is a cross-sectional view of a filtration assembly in accordance with another embodiment;

FIG. 25 is an exploded view of a filter element of the filtration assembly of FIG. 24;

FIG. 26 is a cross-sectional view of a surface cleaning apparatus in accordance with another embodiment;

FIG. 27 is a perspective view of a filter member in accordance with another embodiment;

FIG. 28 is an exploded view of the filter member of FIG. 27;

FIG. 29 is a perspective view of a filter member in accordance with another embodiment;

FIG. 30 is a top plan view of the filter member of FIG. 29;

FIG. 31 is a cross-sectional view taken along line 31-31 in FIG. 30;

4

FIG. 32 is a cross-sectional view of a surface cleaning apparatus including the filter member of FIG. 29;

FIG. 33 is a cross-sectional view of the surface cleaning apparatus of FIG. 32, with a filter housing opened and the filter member removed, in accordance with an embodiment;

FIG. 34 is a perspective view of a filter member in accordance with another embodiment;

FIG. 35 is an exploded view of the filter member of FIG. 34;

FIG. 36 is a perspective view of a filter member in accordance with another embodiment;

FIG. 37 is a top plan view of the filter member of FIG. 36;

FIG. 38 is a cross-sectional view taken along line 38-38 in FIG. 37;

FIG. 39 is a perspective view of a filter member in accordance with another embodiment;

FIG. 40 is an exploded view of the filter member of FIG. 39;

FIG. 41 is a perspective view of a filter member in accordance with another embodiment;

FIG. 42 is a top plan view of the filter member of FIG. 41;

FIG. 43 is a cross-sectional view taken along line 43-43 in FIG. 42;

FIG. 44 is a cross-sectional view of a surface cleaning apparatus including the filter member of FIG. 41; and

FIG. 45 is a cross-sectional view of the surface cleaning apparatus of FIG. 44, with a filter housing opened and the filter member removed, in accordance with an embodiment.

## DESCRIPTION OF VARIOUS EMBODIMENTS

Various apparatuses, methods and compositions are described below to provide an example of an embodiment of each claimed invention. No embodiment described below limits any claimed invention and any claimed invention may cover apparatuses and methods that differ from those described below. The claimed inventions are not limited to apparatuses, methods and compositions having all of the features of any one apparatus, method or composition described below or to features common to multiple or all of the apparatuses, methods or compositions described below. It is possible that an apparatus, method or composition described below is not an embodiment of any claimed invention. Any invention disclosed in an apparatus, method or composition described below that is not claimed in this document may be the subject matter of another protective instrument, for example, a continuing patent application, and the applicant(s), inventor(s) and/or owner(s) do not intend to abandon, disclaim, or dedicate to the public any such invention by its disclosure in this document.

The terms “an embodiment,” “embodiment,” “embodiments,” “the embodiment,” “the embodiments,” “one or more embodiments,” “some embodiments,” and “one embodiment” mean “one or more (but not all) embodiments of the present invention(s),” unless expressly specified otherwise.

The terms “including,” “comprising” and variations thereof mean “including but not limited to,” unless expressly specified otherwise. A listing of items does not imply that any or all of the items are mutually exclusive, unless expressly specified otherwise. The terms “a,” “an” and “the” mean “one or more,” unless expressly specified otherwise.

As used herein and in the claims, two or more parts are said to be “coupled,” “connected,” “attached,” “joined,” “affixed,” or “fastened” where the parts are joined or operate together either directly or indirectly (i.e., through one or more intermediate parts), so long as a link occurs. As used

herein and in the claims, two or more parts are said to be “directly coupled”, “directly connected”, “directly attached”, “directly joined”, “directly affixed”, or “directly fastened” where the parts are connected in physical contact with each other. As used herein, two or more parts are said to be “rigidly coupled”, “rigidly connected”, “rigidly attached”, “rigidly joined”, “rigidly affixed”, or “rigidly fastened” where the parts are coupled so as to move as one while maintaining a constant orientation relative to each other. None of the terms “coupled”, “connected”, “attached”, “joined”, “affixed”, and “fastened” distinguish the manner in which two or more parts are joined together.

Furthermore, it will be appreciated that for simplicity and clarity of illustration, where considered appropriate, reference numerals may be repeated among the figures to indicate corresponding or analogous elements. In addition, numerous specific details are set forth in order to provide a thorough understanding of the example embodiments described herein. However, it will be understood by those of ordinary skill in the art that the example embodiments described herein may be practiced without these specific details. In other instances, well-known methods, procedures, and components have not been described in detail so as not to obscure the example embodiments described herein. Also, the description is not to be considered as limiting the scope of the example embodiments described herein.

#### General Description of a Vacuum Cleaner

Referring to FIGS. 1-2, an exemplary embodiment of a surface cleaning apparatus is shown generally as **100**. The following is a general discussion of apparatus **100** which provides a basis for understanding several of the features which are discussed herein. As discussed subsequently, each of the features may be used individually or in any particular combination or sub-combination in this or in other embodiments disclosed herein.

Embodiments described herein include an improved filter member **160**, and a surface cleaning apparatus **100** including the same. Surface cleaning apparatus **100** may be any type of surface cleaning apparatus, including for example a hand vacuum cleaner as shown, a stick vacuum cleaner, an upright vacuum cleaner, a canister vacuum cleaner, an extractor or a wet/dry type vacuum cleaner. Optionally, the surface cleaning apparatus may use one or more cyclones and may therefore be a cyclonic surface cleaning apparatus.

In FIGS. 1-2, surface cleaning apparatus **100** is illustrated as a hand vacuum cleaner, which may also be referred to also as a “handvac” or “hand-held vacuum cleaner”. As used herein, a hand vacuum cleaner is a vacuum cleaner that can be operated to clean a surface generally one-handedly. That is, the entire weight of the vacuum may be held by the same one hand used to direct a dirty air inlet of the vacuum cleaner with respect to a surface to be cleaned. For example, handle **104** and dirty air inlet **108** may be rigidly coupled to each other (directly or indirectly), such as being integrally formed or separately molded and then non-removably secured together such as by an adhesive or welding, so as to move as one while maintaining a constant orientation relative to each other. This is to be contrasted with canister and upright vacuum cleaners, whose weight is typically supported by a surface (e.g. a floor) during use, and when a canister vacuum cleaner is operated or when an upright vacuum cleaner is operated in a ‘lift-away’ configuration, a second hand is typically required to direct the dirty air inlet at the end of a flexible hose.

Still referring to FIGS. 1-2, surface cleaning apparatus **100** includes a main body or a hand vac body **112** having an air treatment member **116** (which may be permanently

affixed to the main body or may be removable therefrom for emptying), a dirty air inlet **108**, a clean air outlet **120**, and an air flow path **124** extending between the dirty air inlet **108** and the clean air outlet **120**.

Surface cleaning apparatus **100** has a front end **128**, a rear end **132**, an upper end (also referred to as the top) **136**, and a lower end (also referred to as the bottom) **140**. In the embodiment shown, dirty air inlet **108** is at an upper portion of apparatus front end **128** and clean air outlet **120** is at a rearward portion of apparatus **100** at apparatus rear end **132**. It will be appreciated that dirty air inlet **108** and clean air outlet **120** may be positioned in different locations of apparatus **100**.

A suction motor **144** is provided to generate vacuum suction through air flow path **124**, and is positioned within a motor housing **148**. Suction motor **144** may be a fan-motor assembly including an electric motor and impeller blade(s). In the illustrated embodiment, suction motor **144** is positioned in the air flow path **124** downstream of air treatment member **116**. In this configuration, suction motor **144** may be referred to as a “clean air motor”. Alternatively, suction motor **144** may be positioned upstream of air treatment member **116**, and referred to as a “dirty air motor”.

Air treatment member **116** is configured to remove particles of dirt and other debris from the air flow. In the illustrated example, air treatment member **116** includes a cyclone assembly (also referred to as a “cyclone bin assembly”) having a single cyclonic cleaning stage with a single cyclone **152** and a dirt collection chamber **156** (also referred to as a “dirt collection region”, “dirt collection bin”, “dirt bin”, or “dirt chamber”). Cyclone **152** has a cyclone chamber **154**. Dirt collection chamber **156** may be external to the cyclone chamber **154** (i.e. dirt collection chamber **156** may have a discrete volume from that of cyclone chamber **154**). Cyclone **152** and dirt collection chamber **156** may be of any configuration suitable for separating dirt from an air stream and collecting the separated dirt respectively and may be in communication by a dirt outlet of the cyclone chamber.

In alternate embodiments, air treatment member **116** may include a cyclone assembly having two or more cyclonic cleaning stages arranged in series with each other. Each cyclonic cleaning stage may include one or more cyclones arranged in parallel with each other and one or more dirt collection chambers, of any suitable configuration. The dirt collection chamber(s) may be external to the cyclone chambers of the cyclones. Alternatively, one or more (or all) of the dirt collection chamber(s) may be internal to one or more (or all) of the cyclone chambers. For example, the internal dirt collection chamber(s) may be configured as a dirt collection area within the cyclone chamber.

In other alternative embodiments, air treatment member **116** may not include a cyclonic cleaning stage. For example, air treatment member **116** may include a bag, a porous physical filter media (such as, for example foam or felt), one or more screen or other air treating means.

Referring to FIG. 2, hand vacuum cleaner **100** may include a pre-motor filter **160** provided in the air flow path **124** downstream of air treatment member **116** and upstream of suction motor **144**. Pre-motor filter **160** may be formed from any suitable physical, porous filter media (also referred to as “porous filter material”). For example, pre-motor filter **160** may be one or more of a foam filter, felt filter, HEPA filter, or other physical filter media. In some embodiments, pre-motor filter **160** may include an electrostatic filter, or the like. As shown, pre-motor filter **160** may be located in a pre-motor filter housing **164** that is external to the air treatment member **116**.

In the illustrated embodiment, dirty air inlet **108** is the inlet end **168** of an air inlet conduit **172**. Optionally, inlet end **168** of air inlet conduit **172** can be used as a nozzle to directly clean a surface. Alternatively, or in addition to functioning as a nozzle, air inlet conduit **172** may be connected (e.g. directly connected) to the downstream end of any suitable accessory tool such as a rigid air flow conduit (e.g., an above floor cleaning wand), a crevice tool, a mini brush, and the like. As shown, dirty air inlet **108** may be positioned forward of air treatment member **116**, although this need not be the case.

In the embodiment of FIG. 2, the air treatment member comprises a cyclone **152**, the air treatment air inlet is a cyclone air inlet **184**, and the air treatment member air outlet is a cyclone air outlet **188**. Accordingly, in operation, after activating suction motor **144**, dirty air enters apparatus **100** through dirty air inlet **108** and is directed along air inlet conduit **172** to the cyclone air inlet **184**. As shown, cyclone air inlet **184** may direct the dirty air flow to enter cyclone chamber **154** in a tangential direction so as to promote cyclonic action. Dirt particles and other debris may be disentrained (i.e. separated) from the dirty air flow as the dirty air flow travels from cyclone air inlet **184** to cyclone air outlet **188**. The disentrained dirt particles and debris may discharge from cyclone chamber **154** through a dirt outlet **190** into dirt collection chamber **156** external to the cyclone chamber **154**, where the dirt particles and debris may be collected and stored until dirt collection chamber **156** is emptied.

Air exiting cyclone chamber **154** may pass through an outlet passage **192** located upstream of cyclone air outlet **188**. Cyclone chamber outlet passage **192** may also act as a vortex finder to promote cyclonic flow within cyclone chamber **154**. In some embodiments, cyclone outlet passage **192** may include a screen or shroud **196** (e.g. a fine mesh screen) in the air flow path **124** to remove large dirt particles and debris, such as hair, remaining in the exiting air flow.

From cyclone air outlet **188**, the air flow may be directed into pre-motor filter housing **164** at an upstream side **204** of pre-motor filter **160**. The air flow may pass through pre-motor filter **160** to porous filter media air outlet **208**, and then exit through pre-motor filter chamber air outlet **212** into motor housing **148**. At motor housing **148**, the clean air flow may be drawn into suction motor **144** and then discharged from apparatus **100** through clean air outlet **120**. Prior to exiting the clean air outlet **120**, the treated air may pass through a post-motor filter, which may be one or more layers of filter media.

#### Filter Member

Embodiments herein relate to an improved filter member. Examples illustrated in the figures show a pre-motor filter member (also referred to more simply as a 'pre-motor filter') positioned upstream of the suction motor. It will be appreciated that embodiments of the filter member disclosed herein may be used as a post-motor filter member (also referred to more simply as a 'post-motor filter') positioned downstream of the suction motor.

When air flows through a filter member of porous filter media, most of the dirt particles removed from the air flow collect on upstream surfaces of the filter member (also referred to as 'inlet surfaces' of the filter member). An advantage of collecting dirt on exposed surfaces of the filter member is that the dirt can be more easily cleaned off of the filter member (e.g. by brushing, agitating, or washing the filter member) as compared with dirt that is trapped within the porous filter media of the filter member.

Over time, the upstream surfaces can become clogged upon collecting a threshold amount of dirt from the air flow passing through the filter media. When the upstream surfaces are clogged, the collected dirt may create substantial impedance to air flow entering the filter member through the upstream surfaces. That is, the clogged filter member may produce substantial backpressure in the air flow path. Moreover, a clogged filter member may experience greater dirt penetration into the porous filter media. Dirt that has penetrated into the inner volume of the porous filter media may be more difficult to clean. Occurrence of dirt penetration may increase because a filter member with clogged upstream surfaces has an air inlet with a much reduced effective cross-sectional area, which results in higher velocity air flow at the upstream surfaces, which drives the dirt deeper into the porous filter media. When too much dirt becomes trapped inside the porous filter media, the filter member may require replacement. Thus, dirt penetration reduces the working life of the filter member.

The disclosed filter member provides greater upstream surface area (also referred to as 'inlet surface area') as compared to prior filter designs of the same volume, all else being equal. Greater upstream surface area provides the filter member disclosed herein with more area for dirt to collect on the upstream surfaces of the filter member, and therefore the filter member can remove more dirt from an air flow before the upstream surfaces become clogged. In use, this allows the disclosed filter member to filter a greater volume of air before the filter member creates a substantial pressure drop in the air flow path or experiences substantial dirt penetration. Consequently, the disclosed filter member can be used for a longer period before cleaning or replacing the filter member. Alternately, the disclosed filter member would allow a filter having a smaller volume to be used to have the same performance as compared to prior filter designs of the same volume, all else being equal.

Referring to FIGS. 2-3, surface cleaning apparatus **100** may include a filter housing **164** that holds filter member **160**. Filter member **160** is preferably removable from filter housing **164** for cleaning or replacement. Alternatively, filter member **160** may be permanently connected to filter housing **164**, and user accessible for cleaning in-situ. In the example shown, filter housing **164** includes an openable door **216**. When filter housing door **216** is opened, filter member **160** may be user accessible to remove filter member **160** as shown for cleaning or replacement, or to clean (e.g. agitate or brush) filter member **160** in-situ. Alternately, filter housing **164** may be removed concurrently with filter member **160**.

Door **216** may be openable in any manner that provides user access to filter member **160** when opened. In the illustrated example, door **216** is rotatably (e.g. pivotably) openable by a hinge **220**. Alternatively or in addition, door **216** may be openable in translation (e.g. slide along a rail), or door **216** may be removable from apparatus **100**.

Alternatively or in addition to providing user access to filter member **160**, filter member **160** may be cleaned automatically by apparatus **100** (e.g. by a mechanical agitator). In such embodiments, filter housing **164** may optionally provide no user access to filter member **160**. For example, filter housing **164** may not include an openable door **216**.

Reference is now made to FIGS. 4, 5A, and 5B. Filter member **160** can include one or a plurality of individual filter elements **224** of porous filter media. In the illustrated embodiment, filter member **160** includes a plurality of filter element **224** positioned in parallel (i.e. as opposed to in

series) within the air flow path 124 (FIG. 2). Each filter element 224 has an outer surface 228 that bounds the volume of porous filter media inside. The filter element outer surface 228 includes at least one upstream face 204 (also referred to as an 'upstream surface', an 'upstream side', an 'inlet face', an 'inlet surface', or an 'inlet side') that provides an inlet for air entering the filter element 224. Filter element outer surface 228 also includes at least one portion 208 that defines an air outlet for air exiting the porous filter media. In use, air enters each filter element 224 through their respective upstream face(s) 204, travels downstream within each filter element 224, and exits each filter element 224 through their respective porous filter media air outlet(s) 208.

As shown, filter member 160 has filter elements 224, which collectively have filter element upstream faces 204 with a total surface area greater than the total surface area of the filter element portions 208 that define their porous filter media air outlets. Thus, filter member 160 has a relatively large filter element upstream surface area. As explained above, this provides filter member 160 with a greater capacity to collect dirt on the filter element upstream faces 204, whereby the filter member 160 may operate longer between cleanings, and enjoy a longer working life before requiring replacement. Preferably, the total surface area of upstream faces 204 is at least twice the total surface area of the porous filter media air outlets 208. In the illustrated example, the total surface area of upstream faces 204 is greater than six times the total surface area of the porous filter media air outlets 208.

Referring to FIGS. 5A-5B, filter element 224 may have any number of upstream faces 204, and can have filter media outlet portion(s) 208 on any number of downstream faces 232. For example, filter element 224 may have a greater number of upstream faces 204 than downstream faces 232, which may promote a greater total inlet cross-sectional area than the total outlet cross-sectional area, depending on the size and configuration of the faces. In some embodiments, filter element 224 may be polyhedral. In the illustrated embodiment, filter element 224 is shown having a hexahedral (e.g. cubic) shape, with five upstream faces 204 and an outlet portion 208 provided on a single downstream face 232. In this example, the total surface area of upstream faces 204 is greater than five times the total surface area of the porous filter media air outlets 208.

Outlet portion 208 may include the entirety of filter element downstream face(s) 232 or a lesser portion thereof. In the illustrated embodiment, outlet portion 208 is less than the entire filter element downstream face 232, and is spaced apart from the immediately adjacent upstream faces 204. An advantage of this design is that it can require air that enters an upstream face 204 at a location nearest outlet portion 208 to travel at least a minimum distance (through the porous filter media) effective to filter dirt from the air flow. This may be referred to as preventing the airflow from 'effectively bypassing' the porous filter media. In this way, the dirt separation efficiency of the filter element 224 (i.e. the percentage of dirt removed from the filtered air) may be improved.

The outlet portion(s) 208 may together include any portion of filter element downstream face(s) 232. For example, outlet portion(s) 208 may have a total surface area of less than 75% of the total surface area of the filter element downstream face(s) 232. In the illustrated embodiment, outlet portion 208 is less than 50% of the surface area of the filter element downstream face 232. As shown, outlet portion 208 may be spaced apart from the upstream faces 204, which are connected to the downstream face 232. In the

illustrated example, outlet portion 208 is substantially centered on upstream face 204. This may provide relatively even spacing between outlet portion 208 and the adjacent downstream faces 232.

Still referring to FIGS. 5A-5B, downstream face 232 may include portion 208 that defines the porous filter media air outlet, and a portion 236 that is made air impermeable by an air impermeable material 240 (also referred to as an 'air impermeable member 240'). As shown, air impermeable material 240 may be directly and rigidly attached to downstream face 232 to inhibit air from exiting from downstream face 232 except through outlet portion 208. In this way, air impermeable material 240 may function as an 'outlet mask' that defines (e.g. borders or circumscribes) outlet portion 208. In the illustrated example, air impermeable material 240 surrounds outlet portion 208 in order to space outlet portion 208 from all of the upstream faces 204 that border downstream face 232.

Air impermeable material 240 can be any discrete, air impermeable member that is applied to the porous filter media. In some embodiments, air impermeable material 240 has the form of a coating that is, for example sprayed, stamped, or rolled onto downstream face 232 of filter element 224. In some embodiments, air impermeable material 240 may take the form of a rigid or flexible web or substrate, such as for example a paper, plastic, metal, or silicon sheet or plate, that is rigidly and directly attached to downstream face 232 of filter element 224, such as by adhesive, a fastener, and/or fusing the air impermeable material to the filter element 224 for example. In some embodiments, air impermeable material 240 includes a combination of a coating and a web. In combination, the coating and the web may be air impermeable, even if one or both of the coating and web are air permeable individually.

As used herein, air impermeable material 240 is considered "air impermeable" where air impermeable material 240 reduces the air permeability per unit area of the surface to which it is applied by at least 75%, 80%, 85%, 90%, 95% or more than 95%.

Air impermeable material 240 may be positively connected to filter element 224 by other than, or more than, a friction fit or containment in filter housing 164 (FIG. 2). This may help ensure that the connection between air impermeable material 240 and filter element 224 is properly formed and allows air impermeable material 240 to render the portion 236 of downstream filter face 232 air impermeable.

In some embodiments, air impermeable material 240 is permanently connected to filter element 224. That is, air impermeable material 240 cannot be removed from filter element 224 without damaging one or both of air impermeable material 240 or filter element 224, and without having to reapply bonding agent 238 to restore the connection between air impermeable material 240 and filter element 224. The permanent connection allows air impermeable material 240 and filter housing 164 (FIG. 4) to be user manipulated as a unitary object that can be removed and replaced as one article, for example. The permanent connection may also prevent a loss of filter performance resulting from user error in reconnecting air impermeable material 240 to filter element 224. The permanent connection may be provided by, for example permanent adhesive, welding, coating, or melt bonding the air impermeable material 240 to filter element 224.

In other embodiments, air impermeable material 240 may be removably connected (e.g. semi-permanently connected) to filter element 224. Air impermeable material 240 and filter element 224 may remain connected until a deliberate user

action is taken to separate them. This may permit air impermeable material **240** to remain attached to filter element **224** throughout the lifespan of filter element **224**, and then deliberately disconnected from filter element **224** for use with a subsequent replacement filter element **224**. For example, air impermeable material **240** may be connected to filter element **224** by releasable adhesive, or a fastener (e.g. screw or nail). Reusing the air impermeable material **240** may help reduce the cost and environment impact of replacement filter elements **224**.

Filter member **160** can have filter elements **224** of any shape and positional arrangement. For example, filter member **160** can have filter elements **224** that are hexahedral (e.g. cubic) as seen in FIGS. **4** and **5A-5B**, cylindrical, spherical, pyramidal, or another regular or irregular shape. All filter elements **224** may have the same shape or filter member **160** may have filter elements **224** of two or more shapes. Further, each filter element **224** may have one filter media air outlet **208**, or several spaced apart porous filter media air outlets **208**.

FIG. **16** shows an example of filter elements **224** having a rectangular cross-section with lengths **288** that are greater than their widths **292**. As shown, filter member **160** may include two, side-by-side, spaced apart filter elements **224**. Each filter element **224** is shown including three porous filter media air outlets **208** distributed along the length **288** of each filter element **224**.

FIG. **17** shows an example of filter elements **224** each having a hexagonal cross-sectional shape. As shown, hexagonal filter elements **224** are distributed in a spaced apart manner within a hexagonal filter housing **164**, and each filter element **224** is shown including one porous filter media air outlet **208**.

FIG. **18** shows an example of filter elements **224** each having an arcuate cross-sectional shape. As shown, arcuate filter elements **224** are distributed in a spaced apart manner within an arcuate filter housing **164**, and each filter element **224** is shown including one porous filter media air outlet **208**.

FIGS. **19-21** show examples of filter members **160** having filter elements **224**, each having square cross-sectional shapes that are arranged in a 3×3, 4×4, and 5×3 grid pattern respectively.

FIGS. **22-23** show an example of a filter member **160** having filter elements **224**<sub>1</sub> and **224**<sub>2</sub> that have different cross-sectional sizes and shapes. As shown, filter element **224**<sub>1</sub> has an annular shape (e.g. hollow cylindrical shape), and filter element **224**<sub>2</sub> has a circular cross-sectional shape. Also, filter element **224**<sub>2</sub> is smaller than filter element **224**<sub>1</sub>. The illustration also exemplifies that filter member **160** can have nested filter elements. In the example shown, filter element **224**<sub>2</sub> is nested within filter element **224**<sub>1</sub>. Further, the illustration exemplifies that filter member **160** can have filter elements with different numbers of porous filter media air outlets. As shown, filter element **224**<sub>1</sub> has 16 porous filter media air outlets **208**, circularly distributed in spaced apart relation, and filter element **224**<sub>2</sub> has one filter media air outlet **208**<sub>2</sub>.

Reference is now made to FIGS. **24-25**. In some embodiments, outlet portion **208** may be positioned in a recess **296** of filter element **224**. Recess **296** may provide an air outlet passage **304** which extends in an air flow direction **308**. As shown, air outlet passage **304** may be lined with a sidewall **312**. Some or all of sidewall **312** may be air impermeable. For example, air impermeable member **240** may extend from filter element downstream face **232** into air outlet passage **304**. As illustrated, air impermeable member **240**

may form a pipe that defines passage sidewall **312**. An advantage of this design is that the porous filter media air outlet **208** is offset from filter element downstream face **232** inwards to a position that is more evenly spaced from upstream faces **204**. This may provide each upstream face **204** with a more similar path length to porous filter media air outlet **208**, and therefore a more similar flow resistance to porous filter media air outlet **208**. In turn, this may promote a more even distribution of air flow across upstream faces **204**, which may avoid premature clogging of certain upstream faces **204** that have at least initially the lowest flow resistance to porous filter media air outlet **208** and therefore admit the most air flow.

Reference is now made to FIGS. **27-33**. In some embodiments, recess **296** defines an air outlet passage **304** extending from an upstream face **204**. As compared with the embodiment illustrated in FIGS. **24-25**, in which air outlet passage **304** extends from a downstream face **232** (some or all of which may be made air impermeable by an air impermeable member **240**), upstream face **204** may provide additional upstream surface area to filter element **224**. As discussed above, additional upstream surface area may provide the filter member **160** with more area for dirt to collect on the upstream faces **204** of the filter member **160**, and therefore the filter member **160** can remove more dirt from an air flow before the upstream faces **204** become clogged, all else being equal. In use, this allows the filter member **160** to filter a greater volume of air before the filter member **160** creates a substantial pressure drop in the air flow path or experiences substantial dirt penetration.

In the illustrated example of FIG. **27**, all exterior faces of filter element **224** may be upstream faces **204**. As shown, downstream face **232** may be defined by the interior surface(s) of recess **296**. Air impermeable member **240** may extend into recess **296**, and overlie portion(s) **236** of downstream face **232** to make portion(s) **236** air impermeable. The remaining portion(s) **208** of downstream face **232** may define a porous filter media air outlet.

FIG. **27** may appear to illustrate air impermeable member **240** as being spaced apart from the interior surfaces of recess **296**. This spacing is only shown for clarity to provide air impermeable member **240** and recess **296** with distinguishable lines in the illustration. It will be understood that air impermeable member **240** is in fact positioned as having flush contact with the interior surfaces of recess **296** as exemplified in FIG. **31**.

As shown, air impermeable portion **236** may extend from an upstream face **204** inwardly. That is, portion(s) **208** that defines the porous filter media air outlet may be spaced apart from recess opening **322** at the upstream face **204**. As discussed above, this may position porous filter media air outlet **208** more centrally within filter element **224**, whereby each upstream face **204** may have a more similar path length to porous filter media air outlet **208**, and therefore a more similar flow resistance to porous filter media air outlet **208**, all else being equal.

As exemplified in FIG. **31**, air impermeable member **240** includes a portion **324** within recess **296**, and recess portion **324** includes an outer portion **326** extending inwardly from upstream face **204** and an inner portion **328** extending inwardly from outer portion **326**. As shown, inner portion **328** may border (e.g. surround or circumscribe) the portion(s) **208** defining the porous filter media air outlet. Portions **208** may be bordered by openings **332** formed in inner portion **328**, an open inner end **336** of inner portion **328**, or both as shown. Outer portion **326** may not border any air outlet portion(s) **208**. For example, outer portion **326**



may provide contiguous coverage (free of openings) over a length **340** of recess **296** extending from recess opening **322**. In some embodiments, and as shown, outer portion length **340** (measured in airflow direction **308**) may be at least  $\frac{1}{4}$  of recess length **344** (measured in airflow direction **308**). Depending on the shape of filter element **224**, such length **340** may permit outer portion **326** to effectively offset porous filter media air outlet **208** inwardly from recess opening **322** at upstream face **204**. As discussed above, such an offset may provide numerous advantages.

The illustrated example shows air impermeable recess portion **324** formed as a pipe which extends to an inner end **348** of filter element recess **296**. An advantage of this design is that it simplifies installing filter element **224** onto air impermeable member **240** (i.e. filter element **224** is inserted as far as possible into recess **296**). In alternative embodiments, air impermeable recess portion **324** may be spaced apart from recess inner end **348**. For example, outer portion may be secured in position, such as by an adhesive, so that no inner portion **328** is required (e.g., in FIG. **31**, inner portion may be removed and outer portion may be secured in the position shown). In such a case, outlet portion **208** comprises a contiguous (e.g. cylindrical) section of recess **296** extending from recess inner end **348**. An advantage of this design is that it may permit porous filter media air outlet **208** to have a greater surface area.

FIGS. **34-38** illustrate examples in which filter element **224** is cylindrically shaped.

FIGS. **39-45** illustrate examples in which filter element **224** has a round shape (e.g. substantially ovoid or spherical shape).

#### Filter Housing Having a Filter Member

Embodiments herein relate to an improved filter housing, which may hold the filter member disclosed herein.

Reference is now made to FIGS. **2**, **6**, and **7**. Filter member **160** may be configured (e.g. sized, shaped, and arranged) within filter housing **164** to mitigate backpressure. This allows apparatus **100** to draw greater air flow with same size of suction motor **144**, or to draw the same air flow with a smaller, lighter, less expensive suction motor **144**, all else being equal. In some embodiments, filter member **160** may be configured to provide an air flow path within filter housing **164** having a cross-sectional area that is equal to or greater than a cross-sectional area of the air flow path **124** at one or many critical positions upstream of filter housing **164**.

As shown, within filter housing **164**, a filter element **224** may be positioned with their upstream faces **204** spaced apart from opposing filter housing walls **242** by an outside gap **244**. Outside gap **244** may provide an unobstructed path for air to access and enter upstream faces **204**, which are opposed to housing walls **242**. In embodiments of filter member **160** that have more than one filter element **224**, the filter upstream faces **204** may be spaced apart from opposing upstream faces **204** of adjacent filter elements **224** by an inside gap **248**. Inside gap **248** may provide an unobstructed path for air to access and enter upstream faces **204**, which are opposed to another upstream face **204**.

Outside gaps **244** and inside gaps **248** together have a gap cross-sectional area in a plane **250** transverse to a direction of air flow through the gaps **244** and **248**. The gap cross-sectional area may be equal to or greater than the cross-sectional area of the air treatment member air inlet **184** (in a plane transverse to the direction of air flow through inlet **184**) and/or equal to or greater than the cross-sectional area of the air treatment member air outlet **188** (in a plane transverse to the direction of air flow through air outlet **188**), or both. This may mitigate backpressure that might result

from a flow restriction created by the sizing of gaps **244** and **248**. As discussed above, this may permit apparatus **100** to draw greater air flow with the same size of suction motor **144**, or to draw the same air flow with a smaller, lighter, less expensive suction motor **144** that consumes less power, all else being equal. Without being limited by theory, creating backpressure expends energy, and therefore reducing backpressure may conserve energy. By conserving energy, a battery operated hand vacuum **100** may run for a longer duration on the same size of battery **252**, or run for the same duration on a smaller, lighter, and less expensive battery **252**, all else being equal.

Reference is now made to FIG. **8**, which shows a filter housing **164** holding a filter member **160**, in accordance with an embodiment. Filter housing **164** may be permanently connected to or integrally formed with apparatus **100** (FIG. **1**). Alternatively, filter housing **164** may be removable positionable in a corresponding cavity of apparatus **100** (FIG. **1**) in the manner of a cartridge. As shown, filter housing **164** may include housing sidewalls **242** that connect an upstream wall **254** to a downstream wall **256**. Upstream wall **254** may include a filter housing air inlet **260**. Downstream wall **256** may include a filter housing air outlet **212**. In use, air travels from filter housing air inlet **260** through filter element upstream faces **204**, to porous filter media air outlet **208**, and then exits filter housing **164** through filter housing air outlet **212**. It will be appreciated that housing air inlet **260** and air outlet **212** do not need to be provided in opposing upstream and downstream walls **254** and **256**, so long as they are situated in the air flow path upstream and downstream of filter member **160** respectively. For example, filter housing **164** may be configured so that one or both of housing air inlet **260** and air outlet **212** are provided in a housing sidewall **242**.

Optionally, the cross-sectional area of housing air inlet **260** in a direction transverse to the direction of air flow therethrough is equal to or substantially equal to the cross-sectional area of housing air outlet **212** in a direction transverse to the direction of air flow therethrough and/or equal to or substantially equal to the cross-sectional area of outside gap **244** and inside gap **248** in a direction transverse to the direction of air flow therethrough. In other embodiments, the cross-sectional area of outside gap **244** and inside gap **248** in a direction transverse to the direction of air flow therethrough may be 100%, 200%, 300%, 400%, 500% or more of the cross-sectional area of housing air inlet **260** in a direction transverse to the direction of air flow therethrough and/or the cross-sectional area of housing air outlet **212** in a direction transverse to the direction of air flow therethrough. An advantage of this design is that, as the filter elements accumulate dirt filtered from the air stream, an increase in back pressure produced by the air flow through the filter housing will tend to be limited and may not occur.

Turning to FIG. **9**, in some embodiments a filter element **224** may include an air impermeable material **240** that extends over a portion **264** of one or more upstream faces **204** that border downstream face **232**. In the illustrated example, air impermeable material **240** includes side portions **268** that extend away from downstream face **232** over a portion **264** of every upstream face **204** that borders downstream face **232**. As shown, side portions **268** sit flush against upstream face portions **264** whereby upstream face portions **264** are rendered air impermeable. This may help further mitigate air from effectively bypassing the porous filter media, by inhibiting air from entering upstream face **204** at locations which most closely border porous filter media air outlet **208**. As noted above, mitigating bypass may

improve the dirt separation efficiency of filter element 224 by forcing the air flow to travel at least a minimum distance through the porous filter media.

Still referring to FIG. 9, filter member 160 may be positioned within filter housing 164 with filter element(s) 224 positioned spaced apart from filter housing upstream wall 254. This may define an upstream header 272 that allows air to freely diffuse across the filter element upstream faces 204.

Alternatively or in addition, filter member 160 may be positioned within filter housing 164 with filter element(s) 224 spaced apart from filter housing downstream wall 256 to define a downstream header 276. Downstream header 276 may permit air exiting filter element(s) 224 to consolidate (i.e. rejoin, merge) and exit as a singular air flow. Filter element(s) 224 may be supported in spaced apart relation from filter housing downstream wall 256 in any manner. In the illustrated example, filter housing 164 includes sidewall supports 280 that hold filter elements 224 spaced apart from filter housing downstream wall 256. As shown, filter elements 224 may rest upon sidewall supports 280 with air impermeable material 240 in contact with the sidewall supports 280. Sidewall supports 282 may be integrally formed or permanently connected to air impermeable material 240 as shown, or filter housing downstream wall 256, or neither.

FIG. 10 shows another example in which spacers 280 hold filter elements 224 spaced apart from filter housing downstream wall 256. As shown, spacers 282 may extend from air impermeable material 240 away from filter element downstream face 232. Spacers 282 may be integrally formed or permanently connected to air impermeable material 240 as shown, or filter housing downstream wall 256, or neither.

Referring to FIGS. 5A-B, each filter element 224 may include a discrete air impermeable member 240. An advantage of this design is that it may permit each filter element 224 to be removed for cleaning or replacement on an individual basis as required. Alternatively, two or more (or all) of filter elements 224 may share a common air impermeable member 240. FIG. 8 shows an example in which all of filter elements 224 share a common air impermeable member 240, which extends over the air impermeable portion 236 of each filter element downstream face 232 (see also FIG. 11). An advantage of this design is that it allows air impermeable member 240 to connect the plurality of filter elements 224 in a fixed relative positional arrangement that provides the intended outside and inside gaps 244 and 248 (FIG. 6). This may mitigate a loss of separation efficiency or an increase in backpressure as a result of user error in positionally arranging filter elements 224 with the requisite spacing.

Referring to FIG. 11, filter housing 164 may be openable to provide access to filter member 160 inside. As shown, a wall of filter housing 164 (e.g. upstream wall 254 as shown, a sidewall 242, and/or downstream wall 256) may be movable (e.g. rotatably, slideably, or removably) from a closed position (FIG. 8) to an open position (FIG. 11). In the open position, user access to inspect, clean, and/or remove filter member 160 may be provided.

In alternative embodiments, filter housing 164 may be permanently closed. For example, filter housing 164 may form a disposable filter cartridge that is to be removed and replaced when needed. This may avoid user exposure to the dirt collect by the filter member 160 that is inside filter housing 164.

Alternatively or in addition to being disposable, filter member 160 may be cleaned without opening filter housing

164. FIGS. 12-14 illustrate an exemplary method of cleaning a filter member 160 within filter housing 164. Beginning with FIGS. 12-13, filter housing 164 may be oriented with filter housing air outlet 212 face-up. A cleaning fluid 320 (e.g. water) may be poured into filter housing air outlet 212. The cleaning fluid will flow through filter elements 224 in reverse from filter element outlets 208 to upstream faces 204. The cleaning fluid may entrain dirt that is within the porous filter media, and on upstream faces 204, and carry the dirt out of filter housing 164 through filter housing air inlet 260.

Turning to FIG. 14, a plunger (e.g. a rod) 284 may be inserted through filter housing air outlet 212 and used to push filter elements 224 so that filter elements 224 become compressed against filter housing downstream wall 256. This may be done to agitate the cleaning fluid within the filter elements 224 (e.g. to dislodge additional dirt), and/or to squeeze out cleaning fluid from the filter elements 224 (e.g. to expedite drying). In the illustrated example, filter elements 224 are connected by a common air impermeable member 240, and the plunger 284 presses on the air impermeable member 240 to compress filter elements 224 as a group. Alternatively, filter elements 224 may have individual air impermeable members 240, and may be compressed individually. Alternately, a rigid member may be provided inside the filter housing and moved by a plunger to compress the filter elements.

As shown in FIG. 15, a screen 286 may be provided for filter elements 224 to be compressed against. As compared with a liquid impermeable wall, screen 286 may permit cleaning fluid to expel from filter element 224 through the faces in contact with screen 286. In turn, screen 286 may permit the cleaning fluid to better clean the end faces of filter elements 224.

It will be appreciated that, in alternate embodiments, a cleaning fluid may be introduced through the air inlet port and a plunger may be inserted through the air inlet port. Distributed Filter Elements

As demonstrated by the examples illustrated in FIGS. 16-23, there is great flexibility of design in the shape and size of filter member 160, and the number and arrangement of filter elements 224 therein. Turning to FIG. 26, this design flexibility may permit surface cleaning apparatus 100 to accommodate two or more filter members 160 positioned in parallel in the air flow path 124. For example, apparatus 100 may include two or more pre-motor filter members 160 positioned in parallel in the air flow path 124 between air treatment member air outlet 188 and suction motor air inlet 316. In some embodiments, filter members 160 may be sized and shaped to occupy locations in apparatus 100 that may have otherwise been unused void space. An advantage of occupying otherwise unused space with additional filter member(s) 160 is that it may provide greater dirt separation efficiency and less backpressure, all else being equal.

As exemplified in FIG. 26, two filter members 160 are provided, one above air treatment member 116 and one above handle 104. As shown, air exiting air treatment member 116 may divide into two parallel air flow paths 124<sub>1</sub> and 124<sub>2</sub>. Air flow path 124<sub>1</sub> is shown extending across pre-motor filter member 160<sub>1</sub> from air treatment member air outlet 188 to suction motor air inlet 316, and air flow path 124<sub>2</sub> is shown extending across pre-motor filter member 160<sub>2</sub> from air treatment member air outlet 188 to suction motor air inlet 316.

While the above description provides examples of the embodiments, it will be appreciated that some features and/or functions of the described embodiments are suscep-

tible to modification without departing from the spirit and principles of operation of the described embodiments. Accordingly, what has been described above has been intended to be illustrative of the invention and non-limiting and it will be understood by persons skilled in the art that other variants and modifications may be made without departing from the scope of the invention as defined in the claims appended hereto. The scope of the claims should not be limited by the preferred embodiments and examples, but should be given the broadest interpretation consistent with the description as a whole.

The invention claimed is:

1. A surface cleaning apparatus comprising:

- (a) an air flow path extending from a dirty air inlet to a clean air outlet with an air treatment member and a suction motor positioned in the air flow path;
- (b) a filter housing provided in the air flow path; and,
- (c) a filter member provided in the filter housing, the filter member comprising a plurality of individual filter elements arranged in parallel, each of the individual filter elements comprising porous filter material having at least one upstream face and at least one portion defining a porous filter media air outlet, wherein the at least one upstream face has a larger surface area than the at least one portion,

wherein an outside gap is provided between at least some of the upstream faces and opposed facing walls of the filter housing and an inside gap is provided between opposed upstream faces, and

wherein a cross-sectional area of the outside gaps and the inside gaps, in a plane transverse to a direction of air flow through the outside and inside gaps, is at least as large as a cross-sectional area of an air inlet to the air treatment member in a plane transverse to a direction of air flow through the air inlet to the air treatment member.

2. The surface cleaning apparatus of claim 1 wherein the at least one portion is provided on a single downstream face.

3. The surface cleaning apparatus of claim 2 wherein only a portion of the single downstream face is porous.

4. The surface cleaning apparatus of claim 3 wherein an air impermeable material is provided on a portion of the single downstream face.

5. The surface cleaning apparatus of claim 1 wherein the at least one portion is provided on the interior of the porous filter media and the porous filter media has an air outlet passage extending in an air flow direction, the air outlet passage having a sidewall extending in the air flow direction and at least a portion of the air outlet passage is air impermeable.

6. The surface cleaning apparatus of claim 5 wherein an air impermeable material is provided on at least a portion of the sidewall of the air outlet passage.

7. The surface cleaning apparatus of claim 6 wherein the air impermeable material comprises a conduit inserted into the air outlet passage.

8. The surface cleaning apparatus of claim 1 wherein an air impermeable material is provided on a part of the porous filter media surrounding the porous filter media air outlet.

9. The surface cleaning apparatus of claim 1 wherein at least some of the filter elements have a plurality of upstream faces.

10. The surface cleaning apparatus of claim 1 wherein at least some of the individual filter elements are generally polyhedron in shape.

11. The surface cleaning apparatus of claim 1 wherein at least some of the individual filter elements are generally annular in transverse section and are at least partially nested inside each other.

12. A surface cleaning apparatus comprising:

- (a) an air flow path extending from a dirty air inlet to a clean air outlet with an air treatment member and a suction motor positioned in the air flow path; and,
- (b) an individual filter element comprising a porous filter material having a plurality of upstream faces and at least one portion defining a porous filter media air outlet, wherein an air impermeable material is provided on a portion of a single downstream face.

13. The surface cleaning apparatus of claim 12 wherein the at least one portion is provided on a single downstream face.

14. The surface cleaning apparatus of claim 13 wherein only a portion of the single downstream face is porous.

15. The surface cleaning apparatus of claim 12 wherein the at least one portion is provided on the interior of the porous filter media and the porous filter media has an air outlet passage extending in an air flow direction, the air outlet passage having a sidewall extending in the air flow direction and at least a portion of the air outlet passage is air impermeable.

16. The surface cleaning apparatus of claim 15 wherein an air impermeable material is provided on at least a portion of the sidewall of the air outlet passage.

17. The surface cleaning apparatus of claim 16 wherein the air impermeable material comprises a conduit inserted into the air outlet passage.

18. A surface cleaning apparatus comprising:

- (a) an air flow path extending from a dirty air inlet to a clean air outlet with an air treatment member and a suction motor positioned in the air flow path; and,
- (b) a first pre-motor filter part comprising a first plurality of individual filter elements in parallel and located at a first location in the surface cleaning apparatus;
- (c) a second pre-motor filter part comprising a second plurality of individual filter elements in parallel and located at a second location in the surface cleaning apparatus;

wherein each of the individual filter elements comprises porous filter material having at least one upstream face and at least one portion defining a porous filter media air outlet, wherein the at least one upstream face has a larger surface area than the at least one portion.

19. The surface cleaning apparatus of claim 18 wherein at least some of the individual filter elements are generally polyhedron in shape.

\* \* \* \* \*