



US010159393B2

(12) **United States Patent**
Conrad

(10) **Patent No.:** **US 10,159,393 B2**
(45) **Date of Patent:** **Dec. 25, 2018**

- (54) **SURFACE CLEANING APPARATUS** 7,774,894 B2* 8/2010 Rippl A47L 11/34
15/118
- (71) Applicant: **Omachron Intellectual Property Inc.,** 7,811,022 B2 10/2010 Bobrosky et al.
Hampton (CA) 7,891,047 B2* 2/2011 Milanese A47L 11/34
15/319
- (72) Inventor: **Wayne Ernest Conrad, Hampton (CA)** 8,205,293 B2 6/2012 Rosenzweig et al.
8,245,351 B2 8/2012 Rosenzweig et al.
8,261,402 B2 9/2012 Rosenzweig et al.
- (73) Assignee: **Omachron Intellectual Property Inc.,** 8,353,074 B2 1/2013 Krebs
Hampton, Ontario (CA) 8,458,850 B2 6/2013 Kasper et al.
8,534,301 B2 9/2013 Nottingham et al.
- (*) Notice: Subject to any disclaimer, the term of this 2002/0096201 A1 7/2002 Shaw
patent is extended or adjusted under 35 2005/0115014 A1 6/2005 Worwag
U.S.C. 154(b) by 765 days. 2007/0209138 A1* 9/2007 Tran A47L 5/225
15/320
- (21) Appl. No.: **13/840,729** 2008/0034514 A1 2/2008 Rosenzweig et al.
2008/0066789 A1 3/2008 Rosenzweig et al.
2008/0236635 A1 10/2008 Rosenzweig et al.

(Continued)

(22) Filed: **Mar. 15, 2013**

(65) **Prior Publication Data**
US 2014/0259478 A1 Sep. 18, 2014

FOREIGN PATENT DOCUMENTS

- WO WO 2013/029040 A1 2/2013
- WO WO2013/029040 A1 2/2013

- (51) **Int. Cl.**
A47L 11/40 (2006.01)
- (52) **U.S. Cl.**
CPC *A47L 11/4083* (2013.01); *A47L 11/4011*
(2013.01); *A47L 11/4088* (2013.01)
- (58) **Field of Classification Search**
CPC A47L 11/4083; A47L 11/4086; A47L
11/4011; A47L 11/4008; A47L 13/225
See application file for complete search history.

OTHER PUBLICATIONS


US 8,082,621, 12/2011, Rosenzweig et al. (withdrawn)
Primary Examiner — Dung Van Nguyen
(74) *Attorney, Agent, or Firm* — Philip C. Mendes da
Costa; Bareskin & Parr LLP/S.E.N.C.R.L., s.r.l.

(56) **References Cited**
U.S. PATENT DOCUMENTS

- 6,131,237 A 10/2000 Kasper et al.
- 6,253,414 B1 7/2001 Bradd et al.
- 6,584,990 B2* 7/2003 Shaw A47L 13/225
134/105
- 6,898,820 B2 5/2005 Kasper et al.
- 7,650,667 B2 1/2010 Rosenzweig et al.

(57) **ABSTRACT**
A surface cleaning apparatus may include a surface cleaning head including a cleaning pad mount that is configured to receive a cleaning pad and a water distribution system including a first heating unit in fluid communication with a water reservoir and having a water outlet in communication with the cleaning pad mount. The water distribution system may be configured to deliver water to the water outlet as liquid water.

26 Claims, 8 Drawing Sheets

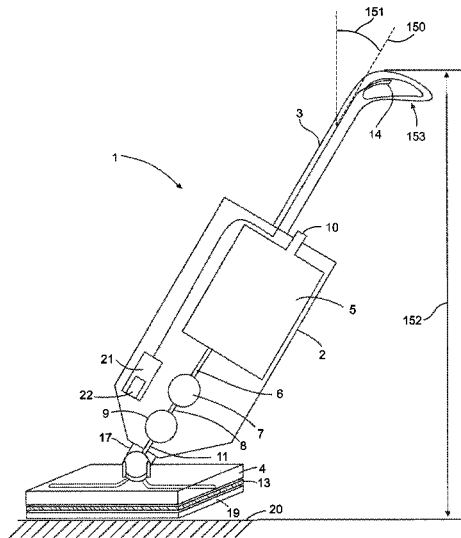

(56)

References Cited

U.S. PATENT DOCUMENTS

2009/0000051	A1	1/2009	Rosenzweig et al.	
2009/0223540	A1	9/2009	Rosenzweig et al.	
2009/0320231	A1	12/2009	Rosenzweig et al.	
2010/0024146	A1	2/2010	Rosenzweig et al.	
2010/0037495	A1	2/2010	Rosenzweig et al.	
2010/0126533	A1	5/2010	Nottingham et al.	
2010/0287716	A1	11/2010	Kasper et al.	
2011/0131753	A1	6/2011	Krebs	
2012/0137465	A1	6/2012	Nolan et al.	
2012/0145189	A1*	6/2012	Knopow	A47L 13/16 134/6
2012/0145191	A1	6/2012	Williams et al.	
2012/0151703	A1	6/2012	Chow	
2012/0222227	A1*	9/2012	Johnson	A47L 11/4002 15/105
2013/0091647	A1	4/2013	Yuan	
2013/0167319	A1	7/2013	Tang	
2013/0209075	A1	8/2013	Ma	
2014/0041147	A1	2/2014	Pagoria et al.	

* cited by examiner

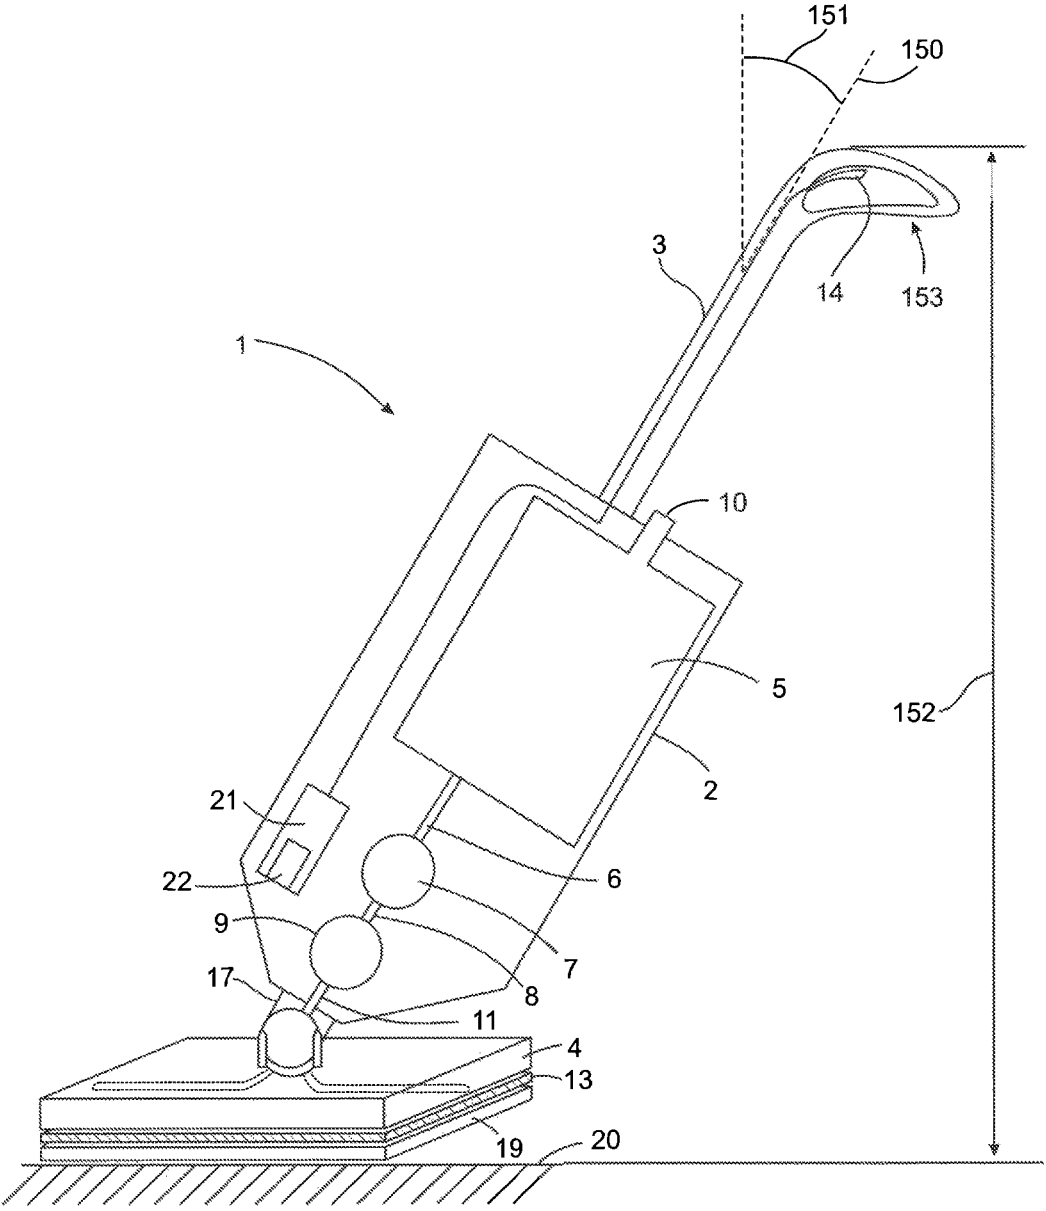


Fig. 1

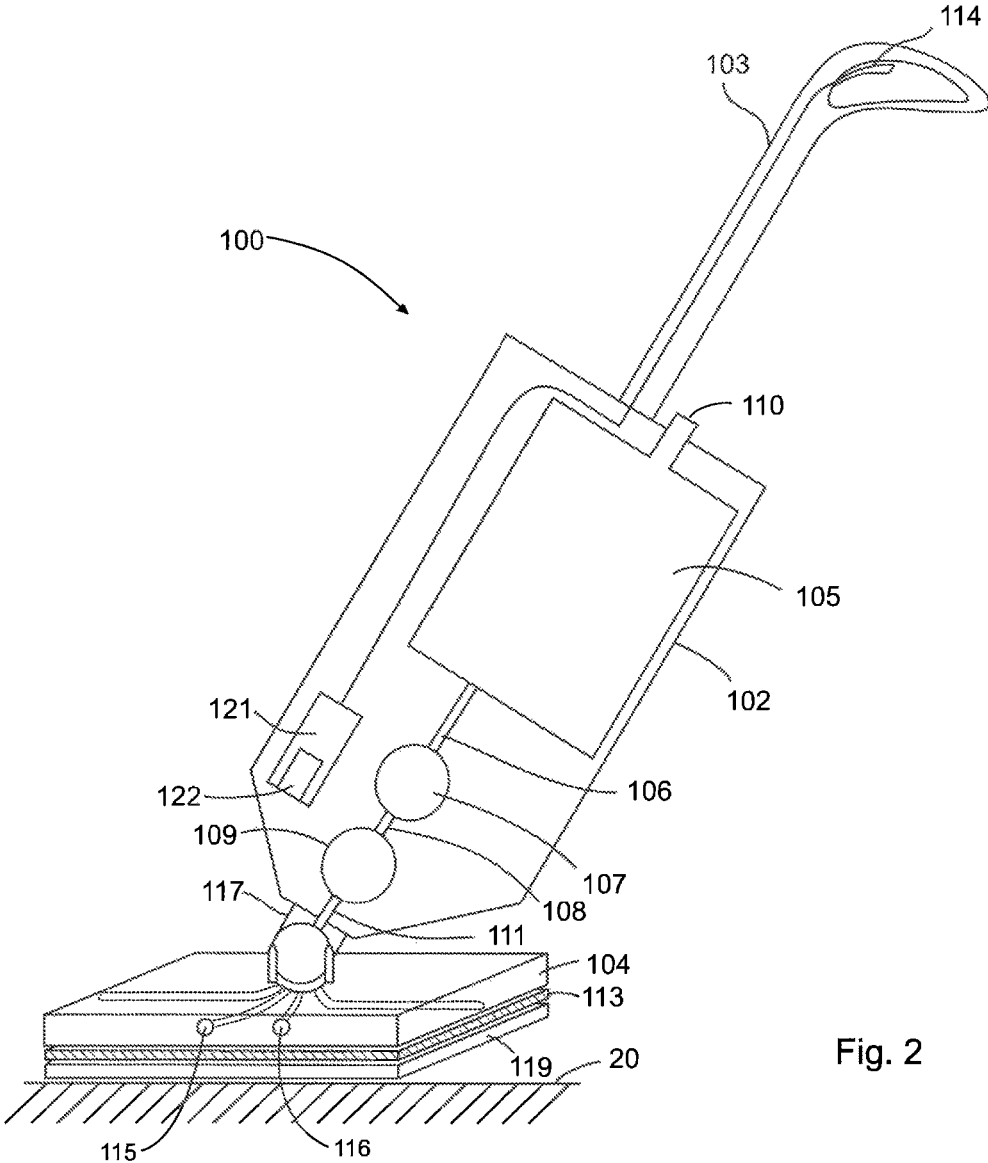


Fig. 2

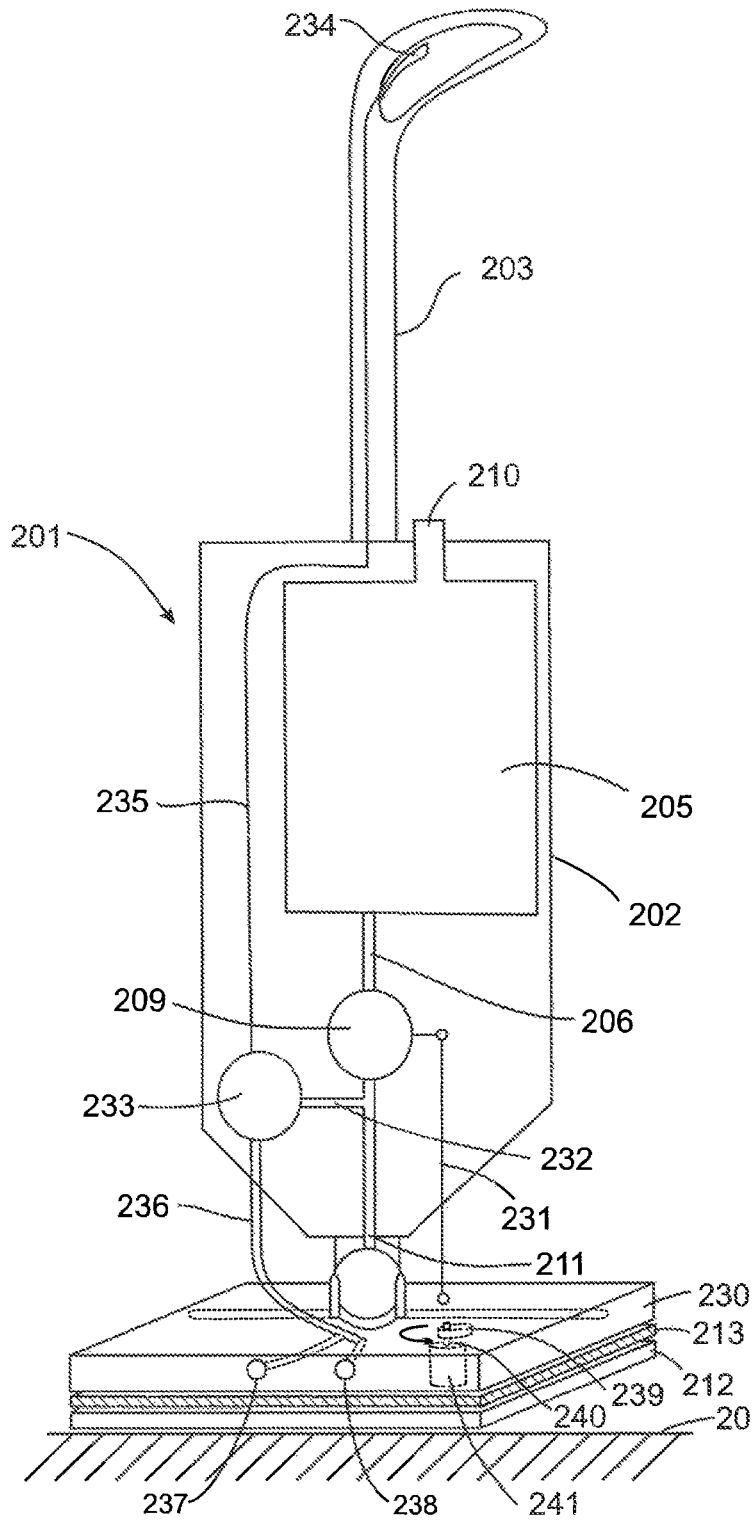


Fig. 3

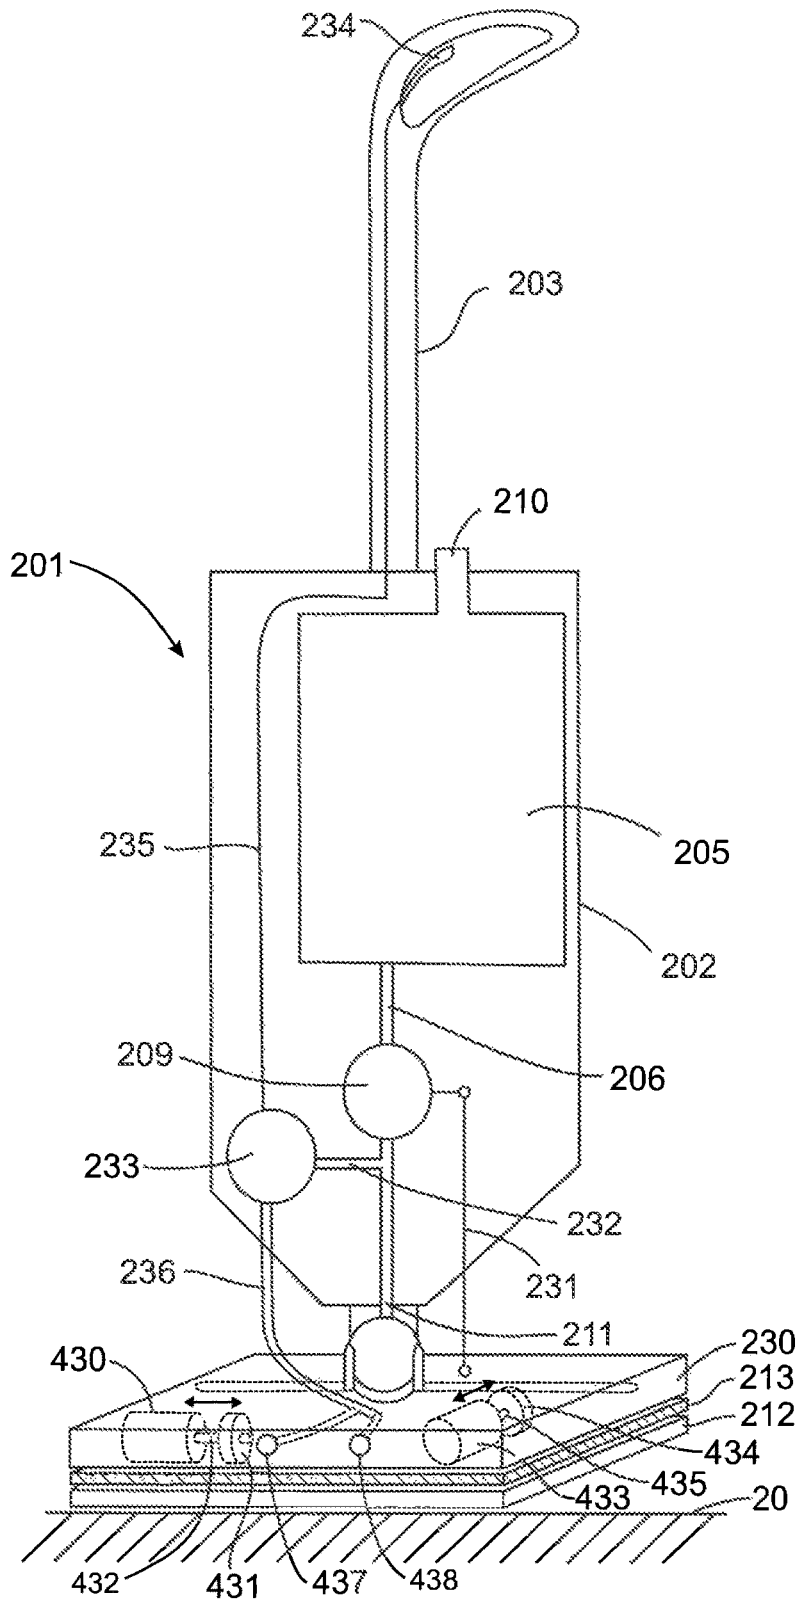


Fig. 4

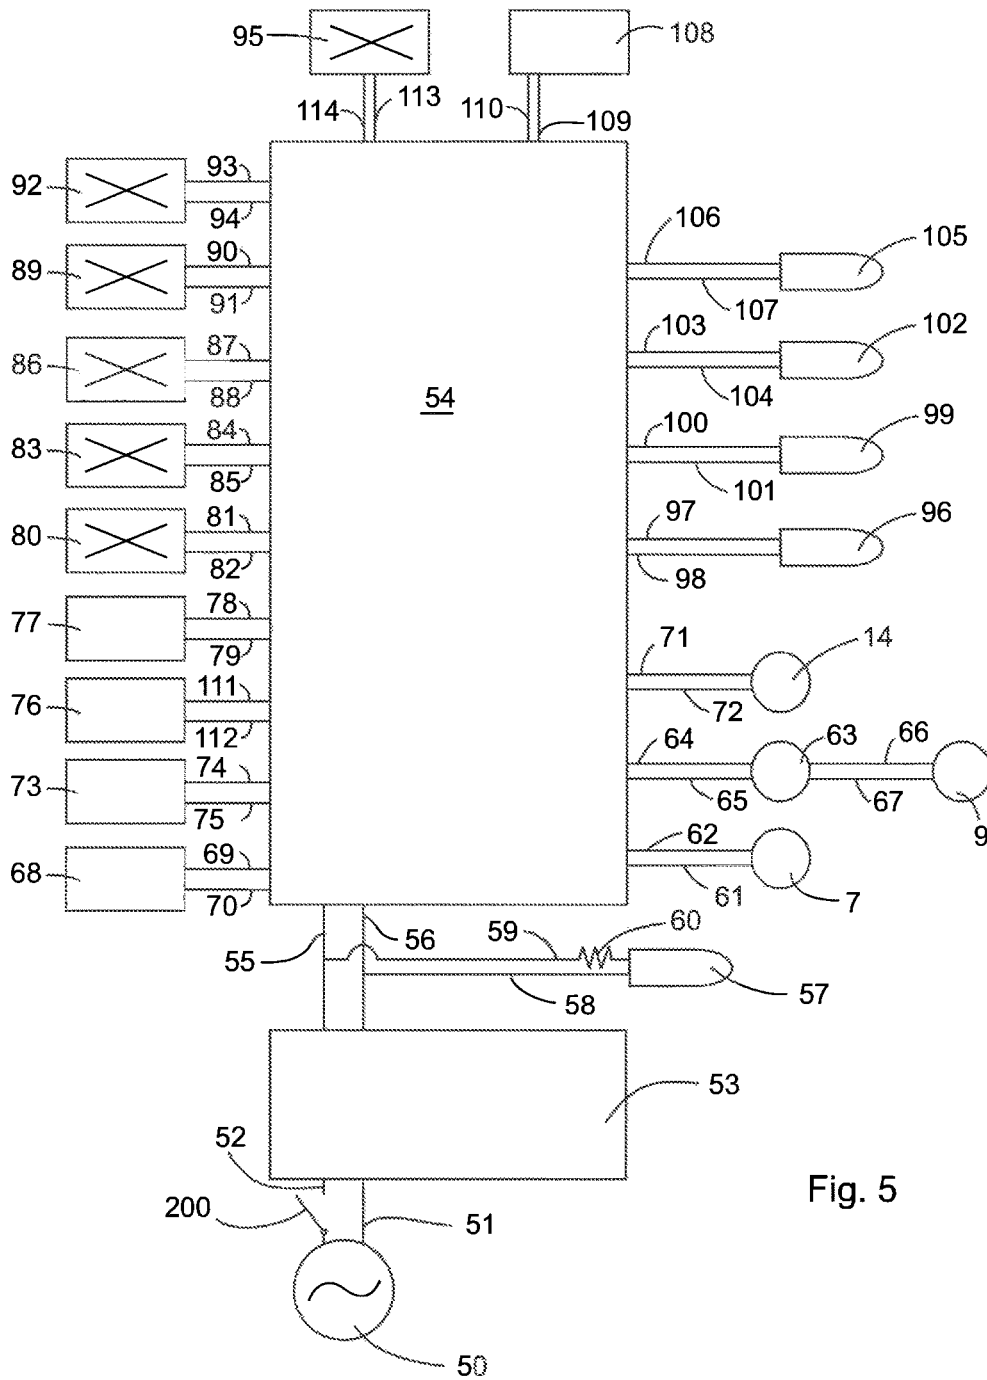


Fig. 5

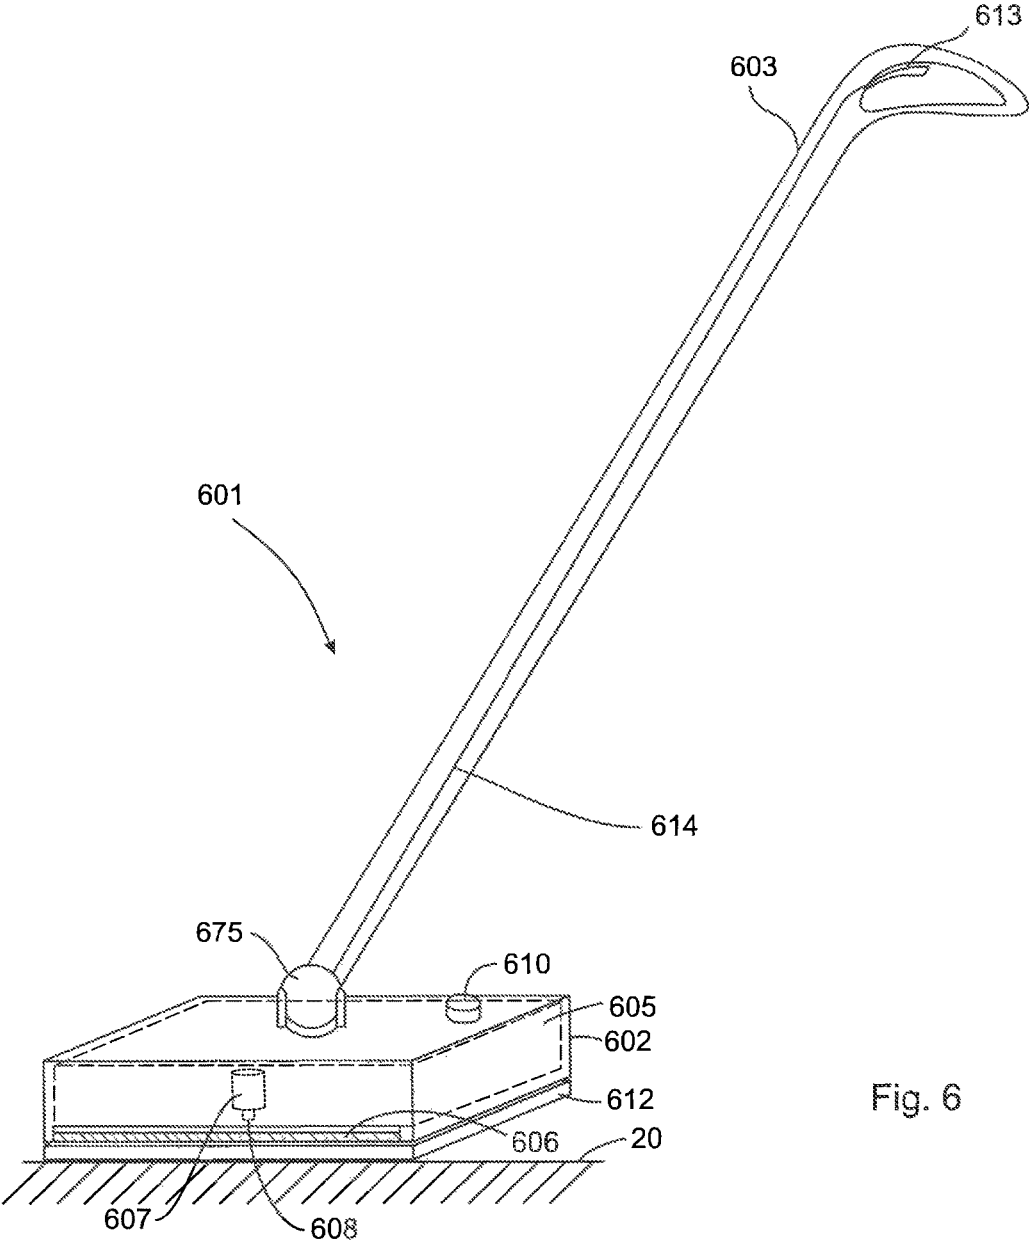


Fig. 6

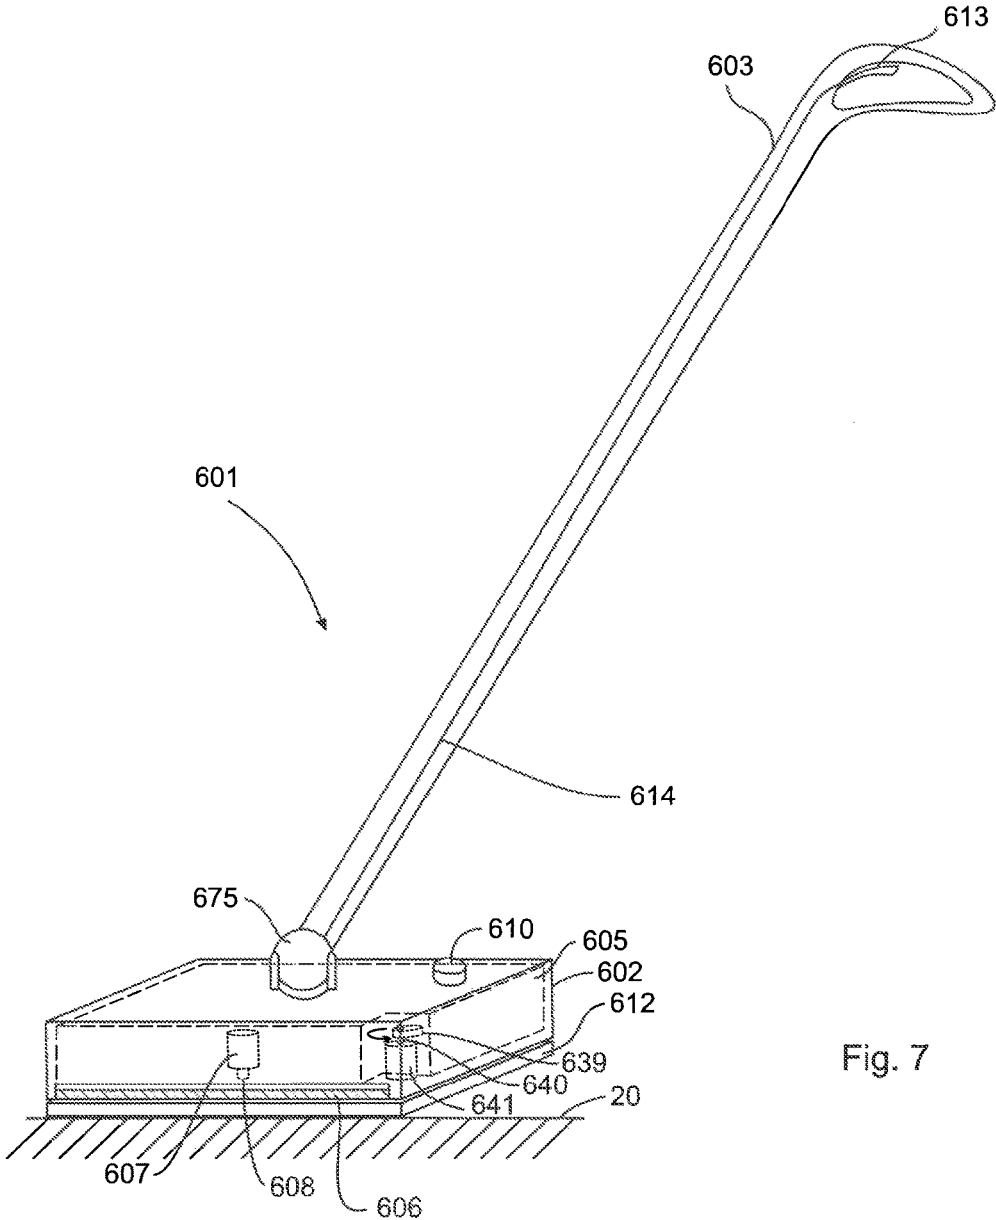


Fig. 7

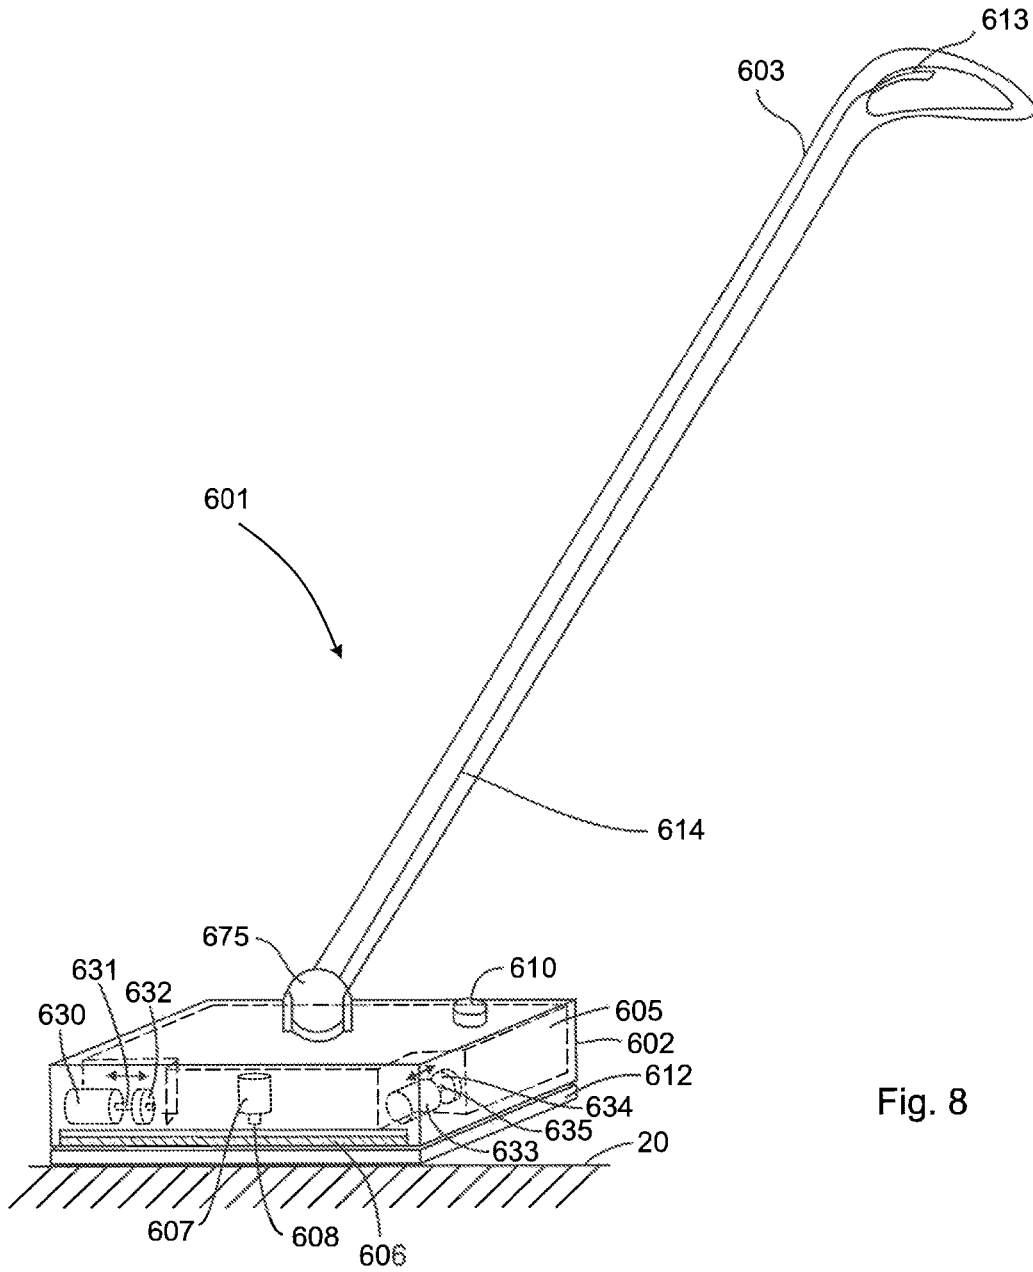


Fig. 8

1

SURFACE CLEANING APPARATUS

FIELD

The invention relates generally to a surface cleaning apparatus. An embodiment described herein relates to a heated towel cleaning appliance which is optimized for cleaning smooth floor surfaces, such as linoleum, wood and tile.

BACKGROUND

Throughout the world many homes include smooth flooring surfaces such as linoleum, vinyl, wood and ceramic tile and less carpeting and soft floor coverings. As such, there is an increased requirement for improved methods of cleaning such surfaces. Many steam cleaning appliances have been designed for floor cleaning but their shortcomings in terms of size, weight, reliability and cleaning performance have limited their use.

One problem associated with current steam mops is that the steam alone may be insufficient to provide viable disinfection as the cleaning pad temperature adjacent to the surface being cleaned, and the surface being cleaned do not exceed 85° C. and that such temperatures are only maintained for short periods of time. Furthermore, many stains on floor consist at least partially of organic materials which are therefore not readily dissolved or broken down by water and/or steam. There remains a need for a floor cleaning appliance which can effectively clean and disinfect. A further problem with the use of current steam mops is that many back and forth strokes are required to remove many types of stains.

A further problem with current steam mops is that the rate of steam delivery is fixed while different flooring surfaces and different usage patterns such as the number of cleaning strokes per minute would change the amount of steam and/or cleaning chemicals required to create optimal cleaning.

SUMMARY

This summary is intended to introduce the reader to the more detailed description that follows and not to limit or define any claimed or as yet unclaimed invention. One or more inventions may reside in any combination or sub-combination of the elements or process steps disclosed in any part of this document including its claims and figures.

Surface cleaning apparatuses can be used to clean floors and other surfaces. In some embodiments, a surface cleaning apparatus can be configured to produce steam and/or heated water and to use the steam and/or heated water to help clean the surface. For example, a surface cleaning apparatus may be configured as a steam cleaning apparatus or mop that includes a reservoir for storing water, a heater or boiler for heating the water and converting at least a portion of the water into steam, and a surface cleaning member (such as a cleaning pad) for contacting the surface. The mop may include a nozzle for directing or spraying the steam and/or water directly onto the surface to be cleaned (for example in front of the surface cleaning member) so that the surface is pre-wetted before being contacted with the surface cleaning member. Alternatively, or in addition, a mop may be configured so that the steam and/or water is supplied to the surface cleaning member, and/or sprayed through the surface cleaning member. In such a configuration, the surface cleaning member can be wetted and/or heated while it is in use, and can be the means by which the surface is wetted.

2

In accordance with one broad aspect of the teachings described herein, which may be used in combination with any other aspects, a surface cleaning apparatus may include a surface cleaning head including a cleaning pad mount that is configured to receive a cleaning pad and a water distribution system including a first heating unit in fluid communication with a water reservoir and having a water outlet in communication with the cleaning pad mount. The water distribution system may be configured to deliver water to the water outlet as liquid water. Accordingly, instead of providing steam, hot water may be delivered to the cleaning pad. Providing hot water, even water 95-99° C. requires less energy than producing steam. Therefore, if the unit is operated by an on board power source (e.g., batteries), it may operate longer without recharging the on board power source.

Optionally or in addition, the cleaning pad itself may be heated (e.g., the cleaning pad mount may have a heating element therein). An advantage of this design is that, instead of heating the water, which then heats the cleaning pad, the cleaning pad may itself be heated and water, e.g., at room temperature from a reservoir, may be applied to the cleaning pad.

The water distribution system may output water or water and a cleaning agent comprising quaternary ammonium compounds, colloidal silver, thyme oil, cinnamon oil, rosemary oil, sage oil, acetic acid, hydrogen peroxide, tea tree oil, or a combination thereof. The water distribution system outlet may provide fluid to the cleaning pad and/or to the floor.

Similarly, a cleaning agent distribution system may include a cleaning agent outlet directed at least in front of or behind the surface cleaning head. Accordingly, an additional outlet may be configured to provide the cleaning solution to a cleaning pad on the cleaning pad mount and/or the floor.

A controller may be configured to dispense a cleaning agent from the cleaning agent outlet that is at a leading side of the surface cleaning head based on a direction of travel of the surface cleaning head.

The water distribution system may include an outlet directed at least in front of or behind the surface cleaning head and a controller configured to dispense water from the outlet that is at a leading side of the surface cleaning head based on a direction of travel of the surface cleaning head.

The water and/or the cleaning agent distribution system may be configured to deliver a predetermined amount of water for each stroke of the surface cleaning head.

The surface cleaning apparatus may include a detector that receives a signal indicative of the usage of a cleaning pad provided on the cleaning pad mount and a controller may be configured to adjust the amount of water delivered based on a signal from the detector.

The detector may include at least one of a detector to determine the inclination of a handle of the surface cleaning apparatus, the rate of change of the inclination of the handle, the velocity of the surface cleaning head, the rate of acceleration of the surface cleaning head and the conductivity of a cleaning pad.

The surface cleaning apparatus may also include a manually controllable actuator operatively connected to the water distribution system.

The surface cleaning apparatus may also include an automatic dispensing system operatively connected to the water distribution system and a manually controllable dispensing system operatively connected to the water distribution system.

The surface cleaning apparatus may include a cleaning agent distribution system having a cleaning agent outlet and a manually controllable actuator.

The cleaning pad mount may be moveably mounted to the surface cleaning head and the surface cleaning head further may include a drive unit drivingly connected to the cleaning pad mount.

The drive unit may be drivingly connected to the cleaning pad mount to move the cleaning pad mount in a plane that is essentially parallel to a surface to be cleaned.

The drive unit may include at least one motor and at least one offset weight.

The drive unit may include at least one of a solenoid, a sonic transducer, an ultrasonic transducer and a loudspeaker.

At least one of the water reservoir and the heating unit, and preferably both, may be provided in the surface cleaning head.

The surface cleaning head may have a height less than about 4 inches.

At least a portion of the water reservoir, and preferably all, may be transparent.

At least one light to illuminate the water reservoir or to illuminate an area in front of the surface cleaning head, and preferably both, may be provided.

The surface cleaning apparatus may include at least one light to illuminate the water reservoir and a control system to vary the illumination when the water reservoir reaches a low fluid level.

The surface cleaning apparatus may include a low water level detection circuit, the low water level detection circuit comprising a detector monitoring the work performed by the heating unit and an signal member providing a signal when the level of work performed by the heating unit drops below a threshold limit.

The detector may monitor the temperature of the heating unit.

The cleaning pad comprises a hydrophobic material and/or a hydrophilic material.

The surface cleaning apparatus may include a second heating unit thermally connected to the cleaning pad mount.

The first heating unit may be thermally connected to the cleaning pad mount.

In accordance with another broad aspect of the teachings described herein, which may be used in combination with any other aspect, a surface cleaning apparatus may include a surface cleaning head including a cleaning pad mount that is configured to receive a cleaning pad and a water distribution system including a water reservoir and having a water outlet in communication with the cleaning pad mount. The water distribution system may be configured to deliver water to the water outlet as liquid water and a heating unit may be thermally connected to the cleaning pad mount.

The water distribution system may include the heating unit.

The water distribution system may include an additional heating unit.

In accordance with another aspect of the teachings described herein, which may be used in combination with any other aspects, optionally, instead of providing functional components in the housing on the upper portion or other upper portions of the mop, the housing containing the functional components (including, for example, the reservoir, heating apparatus, controllers, etc.) may all be incorporated within the floor nozzle or surface cleaning head. In this configuration, the size of the upper portion may be reduced, and it may lower the center of gravity of the mop. Lowering the center of gravity may make it easier for a user

to maneuver the mop. This configuration may also simplify the relationship between the functional components.

It will be appreciated by a person skilled in the art that a mop may embody any one or more of the features contained herein and that the features may be used in any particular combination or sub-combination.

DRAWINGS

The drawings included herewith are for illustrating various examples of articles, methods, and apparatuses of the teaching of the present specification and are not intended to limit the scope of what is taught in any way.

FIG. 1 is a schematic representation of one embodiment of a mop;

FIG. 2 is a schematic representation an alternative embodiment of a mop;

FIG. 3 is a schematic representation of a further alternative embodiment of a mop;

FIG. 4 is a schematic representation of a further embodiment of a mop;

FIG. 5 is a block diagram of one embodiment of control electronics for a mop;

FIG. 6 is a schematic representation of a further embodiment of a mop;

FIG. 7 is an alternative configuration of the mop of FIG. 6; and,

FIG. 8 is another alternative configuration of the mop of FIG. 6.

DETAILED DESCRIPTION

Various apparatuses or processes will be described below to provide an example of an embodiment of each claimed invention. No embodiment described below limits any claimed invention and any claimed invention may cover processes or apparatuses that differ from those described below. The claimed inventions are not limited to apparatuses or processes having all of the features of any one apparatus or process described below or to features common to multiple or all of the apparatuses described below. It is possible that an apparatus or process described below is not an embodiment of any claimed invention. Any invention disclosed in an apparatus or process described below that is not claimed in this document may be the subject matter of another protective instrument, for example, a continuing patent application, and the applicants, inventors or owners do not intend to abandon, disclaim or dedicate to the public any such invention by its disclosure in this document.

Surface cleaning apparatuses can be used to clean floors and other surfaces. In some embodiments, the surface cleaning apparatus is configured to produce heated water and to use the heated water to help clean the surface. For example, a surface cleaning apparatus may be configured as a cleaning apparatus or mop that includes a reservoir for storing water, a heater or boiler for heating the water and/or the cleaning pad, and a surface cleaning member (such as a cleaning pad) for contacting the surface. The mop may include a nozzle for directing or spraying water directly onto the surface to be cleaned (for example in front of the surface cleaning member) so that the surface is pre-wetted before being contacted with the surface cleaning member. Alternatively, or in addition, a mop may be configured so that water is supplied to the surface cleaning member, and/or sprayed through the surface cleaning member. In such a configuration, the sur-

5

face cleaning member can be wetted and/or heated while it is in use, and can be the means by which the surface is wetted.

In some embodiments, the surface cleaning apparatus may also be configured to produce steam in addition to hot water or a heated cleaning pad. Accordingly, a heater or boiler may be used to heat the water and convert at least a portion of the water into steam.

In accordance with one embodiment of a surface cleaning apparatus, the surface cleaning apparatus may be configured as a mop that includes an upper portion that is pivotally and drivably connected to a surface cleaning head. Referring to FIG. 1, a mop 1 is shown. In the illustrated embodiment, the upper portion is provided in the form of a housing 2 and a handle 3 extending upwardly from the housing 2. The upper portion generally extends along an upper axis 150. The housing 2 is pivotally coupled to a surface cleaning head in the form of floor nozzle 4. The housing 2 may be pivotable between a storage position (in which it is positioned generally above the floor nozzle 4) and a use position (FIG. 1) in which the upper axis 2a is inclined at an angle 151 relative to a vertical plane. The pivot connection between the housing 2 and floor nozzle 4 can be provided by any suitable mechanism, including, for example a pin joint.

The handle 3 extends generally upwardly from the housing. The length of the handle, and resulting overall height of the mop 1, may be any suitable length and preferably is provided to be long enough to permit a user of the mop 1 to maneuver the floor nozzle 4 on a floor surface 20 which it is desired to clean from a standing position. For example, the combined length of the handle 3 and housing 2 may be selected so that when the mop 1 is in use (as illustrated in FIG. 1) the hand grip portion 153 of the handle 3 is spaced above the surface 20 by an operating height 152 that may be between about 36 inches and about 48 inches or more, and preferably may be between about 40 and about 48 inches. Optionally, the floor nozzle 4 can have a height that is between about 1 inch and about 8 inches, and may be between 2 inches and 6 inches and may be less than about 4 inches. Providing a relatively short floor nozzle 4 may allow the nozzle 4 to fit beneath furniture or other obstacles.

The housing 2 may be configured to house or at least partially contain one or more fluid tanks or reservoirs and optionally may contain one or more boilers, heaters, heat exchangers and other steam producing elements. While illustrated schematically in FIG. 1, the housing 2 may be of any suitable shape, size and configuration and may be made from any suitable materials, including, for example, metal and/or plastic.

In the illustrated embodiment, the housing 2 contains a water distribution system comprising a water reservoir 5 in which water or any suitable aqueous cleaning solution or fluid can be stored. From the reservoir 5, the fluid passes through tube member 6 into an electromechanical fluid pump or electromechanical fluid valve 7 through tube member 8 and into a water boiler 9. The tubes may be of any suitable configuration, and may be flexible or rigid tube members formed from any suitable material (e.g. plastic, metal, etc.). The tubes may be sized to provide a desired flow rate of cleaning fluid to satisfy the demands of the mop 1.

The reservoir 5 may be of any suitable configuration, and may be formed from any suitable material, including, for example metal, plastic and glass. Optionally, the reservoir 5 may be removable from the housing 2. Providing a removable reservoir 5 may allow a user to separate the reservoir from the housing 2 to fill, empty, clean or otherwise handle or manipulate the reservoir 5. If the reservoir 5 is removable,

6

preferably a valve or other flow limiting device may be provided at the interface between reservoir 5 and tube 8 (or anywhere else in the flow path) to prevent cleaning fluid from leaking out of the reservoir when it is detached. An inlet port 10 may be provided toward the top of reservoir 5 for filling the reservoir 5 with a cleaning fluid (water or a cleaning solution). In the illustrated example, the fluid reservoir 5 is filled by means of port 10 with any suitable cleaning fluid.

Optionally, if a cleaning solution is used, the cleaning solution can be selected so that it is preferably an environmentally friendly and safe cleaning and/or disinfecting agent which is not readily denatured by the application of heat. Examples of suitable environmentally friendly and safe cleaning and disinfecting agents include quaternary ammonium compounds, colloidal silver, thyme oil, cinnamon oil, rosemary oil, sage oil, acetic acid, hydrogen peroxide, tea tree oil, or a combination thereof.

If a cleaning solution is used, the cleaning solution may be provided in a separate tank. An advantage of such a design is that the cleaning solution may only be applied when desired by a user. Accordingly, a separate cleaning fluid distribution system may be provided comprising a cleaning fluid reservoir, and suitable piping, valving and outlet (which may be any of those disclosed herein). In some embodiments, the cleaning solution distribution system may use some of the components of the water distribution system.

The electromechanical fluid valve 7 may be any suitable valve and may be configured to supply water to the fluid heating chamber 9 at a prescribed delivery rate. Optionally, the electromechanical fluid valve 7 may be controlled by any suitable controller (for example microprocessor 21) and may be operable to supply the fluid to the fluid heating chamber 9 at a variety of different delivery rates. Alternatively, the fluid from reservoir 5 may be dispensed into the fluid heating chamber 9 at a substantially steady rate under the influence of gravity or by other means as known in the art, without the need for a separate flow regulating or pressurizing means, such as electromechanical fluid valve 7.

In the illustrated embodiment the reservoir 5 is not provided with an internal heating element as is done in some other steam generating systems in mops in the art. Instead, in the illustrated embodiment, the heating means for heating the fluid is provided in the form of a fluid heating chamber 9 that is provided within the housing 2 but is separate from and outside the reservoir 5. The fluid heating chamber 9 may include an electric heating element or heating plate, or any other suitable heating unit. Optionally, the mop may include two or more heating units. In this configuration, the reservoir 5 is not directly heated by the fluid heating chamber 9. Instead, only the volume of fluid that is dispensed from the reservoir 5, for example via electromechanical fluid valve 7, is heated by the fluid heating chamber 9. As the volume of fluid dispensed from the reservoir 5 is generally smaller than the volume of fluid held in reservoir 5 (except when the reservoir 5 is nearly empty), the fluid heating chamber 9 need only heat a relatively small volume of water and is therefore able to bring this fluid to a desired temperature relatively quickly as compared to the time required to heat the entire standing volume of the reservoir 5. One advantage of this strategy may be the fact that controlling of the delivery rate water from the reservoir 5 to the fluid heating chamber 9 may provide substantially direct and relatively immediate control of the heating of the fluid within the fluid heating chamber 9. This may allow a user to selectably generate more or less hot water and/or steam on demand by

7

varying the flow rate of electromechanical fluid valve 7. For example, the flow rate may be selected so that a mixture of heated water and steam is provided downstream from the fluid heating chamber 9. In this configuration, heated water heated water and steam may be dispensed onto the cleaning pad or directly onto the floor.

From the reservoir 5, the fluid flows through a tube member 6, through valve 7 and then through tube member 8 and into the fluid heating chamber 9. From the fluid heating chamber 9, the fluid can flow onto the cleaning pad 12 via tube 11. The fluid heating chamber 9 can be configured to heat the fluid to any desired temperature. Optionally, the fluid heating chamber 9 may include a boiler and may be operable to boil the fluid to produce steam, which may be routed to the pad 12 or directly to the surface 20 being cleaned. Alternatively, the fluid heating chamber 9 need not boil the fluid, and may be configured instead to heat the fluid to provide relatively hot fluid to the pad 12, or directly to the surface 20 being cleaned. Heating the cleaning fluid may help enhance its efficacy. The fluid may be heated to any suitable temperature, and may be heated to temperatures between about 70° C. to about 99° C., between about 75° C. to about 95° C. and preferably to between about 80° C. to about 90° C. In embodiments where steam is not desired, the fluid heating chamber 9 may be configured to heat the cleaning fluid to a temperature that is below the boiling point of the fluid, for example less than 100° C. when using water as the cleaning fluid.

Alternately, or in addition, to heating the fluid in fluid heating chamber 9, an electric heating element plate 13 may be provided in the floor nozzle 4. The heating plate 13 may be positioned adjacent the cleaning pad 12 and is configured to directly heat the pad 12 to a desired temperature. Optionally, the plate 13 can be used to heat the pad 12 to a temperature between about 60° C. and about 99° C., between about 70° C. and about 95° C. and preferably to between about 75° C. and about 85° C.

The cleaning pad 12 may be any suitable type of mop pad or cleaning pad, including, for example a cloth or fabric pad, a sponge, a microfiber pad, a foam or other type of pad member. Optionally, the pad 12 may be formed from natural or synthetic fibres, or a combination thereof. In some embodiments, the cleaning pad 12 may be made from a hydrophobic and/or a hydrophilic material and/or may be treated to provide a desired level of hydrophobicity or hydrophilicity. The cleaning pad 12 may be of any suitable shape, including, for example rectangular, triangular, round, curved or any other shape. The cleaning pad 19 may be of any suitable size. In the illustrated embodiment, the pad 19 is generally rectangular and may be about 5.5 inches by about 10.5 inches. Optionally, the cleaning pad 12 may be removably affixed to the underside of the heating element plate 13 which is on the lower size of the nozzle 4.

The flow of cleaning fluid through valve 7 can be controlled by any suitable controller, like the flow of water described above. In the illustrated example, the microprocessor 21 controls the electromechanical fluid valve 7. Alternatively, a different controller may be used.

The valve 7 can be operated to dispense the cleaning fluid at a fixed rate throughout the operation of mop 1. Alternatively, the valve 7 can be operated to adjust the delivery rate of the cleaning based on the inclination of the mop (e.g. the magnitude of angle 151) or the rate of change of the inclination of the handle. The inclination angle 151 of the mop 1 can be between about 5 degrees to about 90 degrees from the vertical, and may be between about 15 to about 60 degrees from the vertical, and most typically may be

8

between about 20 to about 50 degrees from the vertical. For example, the microprocessor 21 may be configured to control the valve 7 to increase the delivery rate of the cleaning solution when the angle 151 increases. The increases in the rate of delivery of the cleaning solution (and/or steam or water) may be continuously variable and/or proportional to the angle 151. Alternatively, the valve 7 may be positionable in two or more discrete positions so that the delivery rate changes as a step function (between predetermined flow rates) instead of in a continuous manner.

To determine the angle 151 of the upper portion, the mop 1 may include any suitable type of sensor or transducer, including, for example, an accelerometer, an encoder or microswitch in the pivot joint between the housing 2 and the floor nozzle 4, an optical sensor or any other suitable mechanism that can be connected to the microprocessor 21. In the illustrated embodiment accelerometer 22 is provided in the housing 2, in communication with microprocessor 21, and can be used to determine the inclination of the upper portion.

Alternatively, or in addition to the microprocessor 21 can dispense fluid at a delivery rate that is proportional to, or based on, the rate of back and forth motion of the mop 1, which can be electronically sensed by any suitable sensor, including, for example, accelerometer 22.

Optionally, a switch 14 may be provided to enable the user to selectively dispense additional water and/or cleaning fluid (if a separate cleaning fluid distribution system is provided) in order to deal with specific stains or other cleaning issues. In the illustrated embodiment the switch 14 is connected to microcontroller 21, which is operable to dispense the cleaning fluid. Alternatively, or in addition, the switch 14 may be a mechanical trigger or dispensing mechanism that is operable to dispense cleaning fluid without engaging the microprocessor 21.

Optionally, the mop 1 may include a sensor for monitoring the conductivity or resistivity of the cleaning pad 12. The conductivity and/or resistivity of the cleaning pad 12 may vary with its moisture level or fluid saturation. The sensor can be connected to the microprocessor 21, which can be configured to dispense the cleaning fluid if the conductivity falls outside or within a predetermine range. This may allow the mop 1 to automatically dispense additional cleaning fluid when the pad 12 becomes relatively dry, and/or limit dispensing of fluid when the pad 12 is relatively wet.

The cleaning fluid may be delivered to the cleaning pad 12 or directly to surface 20. In the illustrated embodiment, the fluid drips from tube 11, through pivot joint and onto the pad 19. For the illustrated cleaning pad, which is about 5.5 inches×10.5 inches, a cleaning fluid flow rate may be between about 1 to and about 30 ml per minute, and may be between about 3 to 15 ml per minute or between about 6 to 12 ml per minute.

Optionally, in accordance with one aspect of the teachings herein that may be used in combination with any other aspect, a mop may be configured to dispense the cleaning fluid directly onto the surface 20 being cleaned, instead of, or in addition to, dispensing fluid onto the pad (See for example FIG. 2). In this configuration, the mop may include one or more fluid delivery members, such as a spray jet or other suitable mechanism, for directing cleaning fluid onto the surface 20. The fluid delivery members may be configured to dispense fluid in front of the pad (in the direct of movement of the mop), behind the pad (e.g. to provide fluid when the surface cleaning head is moved in the reverse direction at the end of a cleaning stroke), to the sides of the pad and any combination thereof. Providing fluid in front of

and behind the pad may pre-wet portions of the surface that the pad is going to be moved over top of when it is moved in a front-back type pattern. This may also allow a user to dispense fluid onto a target area and allow the fluid to soak or wet the area for a period of time before wiping the area with the cleaning pad.

Referring to FIG. 2, another embodiment of a mop **101** is shown. Mop **101** is generally similar to mop **1**, and analogous features are illustrated using like reference characters indexed by **100**. In the illustrated embodiment, the mop **101** includes a housing **102** and a handle **103** extending upwardly from the housing **102**. The housing **102** contains water or an aqueous cleaning solution in a fluid reservoir **105** from which fluid passes through tube member **106** into an electromechanical fluid pump **107** through tube member **108** and into a fluid heating chamber **109**. Preferably, the water or aqueous cleaning solution reservoir **105** is filled through an inlet **110**.

In this embodiment, the cleaning fluid passes from the cleaning fluid reservoir **105** through tube member **106** and into the electromechanical fluid pump **107** then through tube member **108** into the fluid heating chamber **109** through tube member **111** and is then sprayed in front of the floor nozzle **104** by means of the spray jets **115** and **116**.

The spray jets **115** and **116** may be any suitable fluid dispensing apparatus, and may be configured to eject the fluid as a mist, a stream or in any other suitable mode. Providing multiple jets **115** and **116** may be desirable for a number of reasons, including, for example, to help provide a wider spray pattern and to help provide a desired fluid flow rate.

The cleaning spray from the spray nozzles **115** and **116** may occur under a variety of different conditions, including, for example the spray may be generally continuous when the mop **101** is turned on, or the spray may be produced only when mop **101** is in the working inclination angle and/or in response to back and forth motion which is electronically or mechanically sensed (for example using microprocessor **121**), or any combination thereof.

It is understood that the spray means of dispensing water and/or a cleaning fluid as shown in FIG. 2 may be used in conjunction with the means of dispensing the cleaning fluid shown in FIG. 1. For example, additional supply conduits may be provided within the floor nozzle **104** to apply cleaning fluid to the pad **112**, independently from the supply of fluids to the spray jets **115** and **116**.

In this example, the fluid heating chamber **109** heats water/cleaning fluid to enhance its efficacy. An electric heating element plate **113** is provided to heat the pad **112** separately from the cleaning fluid, and may heat the pad to a temperature between about 60° C. and about 99° C., between about 70 and about 95° C. and preferably between about 75° C. and about 85° C.

The cleaning pad **112** is removably affixed to a cleaning pad mount provided on the underside of the heating element plate **113** which is on the lower size of the nozzle **104**. Preferably, the mount is moveable relative to the main body of the floor nozzle **104**. The flow of cleaning fluid through electromechanical fluid pump **107** can be controlled by means of a microprocessor **121** which dispenses fluid at a fixed rate in response to the inclination of the mop. Alternatively, the microprocessor **121** can dispense fluid at a rate proportional to the rate of back and forth motion which is electronically sensed by means such as an accelerometer **122**. A switch **114** may be provided to enable the user to selectively dispense additional cleaning fluid in order to deal with specific stains or other cleaning issues. Alternatively,

the microprocessor **121** can measure the conductivity of the mop pad and dispense fluid to maintain the conductivity within a range which is indicative of the desired moisture level.

Optionally, as exemplified in FIG. 3, the mop may include a drive unit mechanism for imparting vibrations or other motion to the mount supporting the cleaning pad. Vibrating or oscillating the cleaning pad may help scrub the surface **20** and may help reduce the amount of work required from the user when cleaning the surface **20**. Any suitable type of actuator may be used to impart the desired motion and/or vibration to the cleaning pad, or optionally to the entire surface nozzle. Examples of suitable actuators may include, rotating mechanisms, linear-type mechanisms, ultrasonic transducers, loudspeakers, electromechanical mechanisms, mechanical mechanisms, springs, counter weights and the like. This aspect of the teachings described herein may be used in combination with any other aspects.

Referring to FIG. 3, an alternative embodiment of a mop **201** is shown. Mop **201** is generally similar to mop **1**, and analogous elements are identified using like reference characters indexed by **200**.

In this embodiment, the mop **201** includes a housing **202** and a handle **203** extending upwardly from the housing **202**. The housing **202** contains water or an aqueous cleaning solution in a fluid reservoir **205** from which fluid passes through tube member **206** into a mechanical fluid valve **207** through tube member **208** and into a fluid heating chamber **209**. Preferably, the water or aqueous cleaning solution reservoir **205** is filled through an inlet **210**.

The cleaning fluid passes from the cleaning fluid reservoir **205** through tube member **206** and into the mechanical fluid valve **207** then through tube member **208** into the fluid heating chamber **209** through tube member **211**. The fluid can then flow through an opening in a nozzle cover **230** and through an opening in the electric heating element plate **213** and can be dripped onto the cleaning pad **212**.

In the illustrated embodiment, the mop includes a mechanical control mechanism for actuating the valve **207**. In this configuration, the mechanical fluid valve **207** is opened and the flow of cleaning fluid begins when a mechanical linkage **231** attached to the nozzle cover **230** is triggered. In the illustrated example, the linkage **231** is also connected within the housing **202** and is engaged when the housing **202** is tilted more than 10 degrees from its vertical axis relative to the floor **20**, which may represent the working angle for the product.

In addition to dripping cleaning fluid onto the cleaning pad **212**, the mop **201** includes spray jets **237** and **238** for spraying cleaning fluid onto the surface **20**. In this configuration, an alternative path for flowing cleaning fluid is provided by tube member **232** which leads to a mechanical pump **233** which is activated by means of a linkage **235** extending from trigger mechanism **234**. The activation of the mechanical pump **233** forces a volume of heated cleaning fluid through tube member **236** and through the spray jets **237** and **238** located on the front face of the nozzle cover **230**. This enables the user to provide additional cleaning fluid to assist in cleaning stains or disinfecting areas or both.

The trigger **234** can be any suitable mechanism, and optionally may be biased toward the off position. The linkage **235** may be a mechanical linkage mechanism, such as a connecting rod, or may be an electromechanical or electrical linkage mechanism (such as a wire or RF transceiver)

In the illustrated configuration, a electromechanical means is provided to induce short stroke mechanical motion

of an surface nozzle **204** and cleaning pad **212** in a horizontal or lateral plane that is, preferably, generally parallel to the floor **20**. The mechanism for creating planar motion of the nozzle **204** and pad **212** thereon may be any suitable mechanism, including, for example an electric motor. The mechanism may be selectively controlled via a microprocessor, may be controlled by a user or may be “always on” when the mop **201** is powered. Power may be supplied by an external source, or an on board source. Alternatively, instead of an electromechanical mechanism, a non-electric mechanism, such as a spring, movable weight, etc. may be used to impart motion to the pad **212**.

The short stroke motion distance may be any suitable distance, and in some embodiments may be between about 0.001 inches to about 2.000 inches, more about 0.005 to about 1.000 inches, and preferably may be between about 0.010 to about 0.250 inches and between about 0.025 to about 0.100 inches.

In the illustrated embodiment, the mechanism for imparting motion of the cleaning pad **212** includes a motor **241** having a shaft **240** and an offset weight **239** mounted on the shaft **240**. When the mop **201** is plugged in, or more preferably when the upper portion is tilted into its working position, a motor **241** is energized thereby creating a mechanical motion to assist the cleaning process. The motor **241** and its associated offset weight **239** are provided to induce short stroke mechanical motion of the cleaning pad **212** relative to the floor **20** in one or more axis essentially parallel to the floor **20**. Optionally, more than one motor with an offset weight attached may be used and they may operate at different rotational speeds to create a more complex oscillatory motion to optimize the cleaning process.

Optionally, instead of a rotating mechanism, the mop may be configured to include one or more linear-type mechanism to induce linear-type movements or vibrations of the cleaning pad **212**. Referring to FIG. 4, in another embodiment of the mop **201**, a solenoid **430** is mounted within the nozzle cover **230** and has a weight **431** attached to its moving member **432** such that when the solenoid is energized with an AC waveform signal, a linear oscillation is created. The frequency of the AC signal may be varied either periodically or continuously by means of a microcontroller to enhance the mechanical action. Optionally, a second solenoid **433** is mounted within the nozzle cover **230** has a weight **334** attached to its moving member **335** such that when the solenoid is energized with an AC waveform signal, a linear oscillation is created. More than 2 solenoids may also be employed.

The frequency of the AC signal applied to either or both solenoids **330**, **333** may be varied either periodically or continuously to enhance the mechanical action. The range of applied frequencies for the solenoids **330**, **333** can be any suitable range, including, for example from about 0.01 Hz to about 60 KHz, from about 1 Hz to about 20 KHz and preferably from about 10 Hz to about 30 Hz. Optionally, more than 2 solenoids may be employed.

Alternatively, or in addition any type of actuator may be used in combination with any of the embodiments herein to impart the desired vibration, including, for example a linear motor, a miniature acoustic or ultrasonic transducer, and a loudspeaker may be used in place of the solenoid to create the mechanical motion described.

Referring to FIG. 5, a schematic representation of one embodiment of a control system for controlling a mop is shown. The control system includes a power source **50**. The power source **50** may be any suitable source, including, for example, an alternating current source or a DC battery.

In the illustrated embodiment, wires **51** and **52** are connected to a power supply **53**, which in turn provides power to a microcontroller **54** via wires **55** and **56**. The microcontroller **54** may be any suitable microcontroller or other controller apparatus, including, for example, the microcontrollers positioned within the housings of the embodiments of the mops described herein. The microcontroller **54** is configured to receive signals from a plurality of sensors and/or transducers, and is operable to control a variety of output devices, including, for example user feedback and/or information display apparatuses.

In the illustrated embodiment, LED light **57** is connected to wires **55** and **56** by means of wires **58** and **59** which may optionally incorporate resistor **60** if the voltage required by the microcontroller **54** does not match the voltage required by the LED light **57**. The LED **57** may be used to indicate to the user that power is being supplied to the appliance. LED **57** may optionally be controlled and or powered by the microcontroller **54** directly.

An electromechanical valve or electromechanical fluid pump or electromechanical fluid valve **7** (see also FIG. 1) is connected to microcontroller **54** by means of wires **61** and **62** and provides the means to control the flow of cleaning fluid (water or cleaning solution) from the reservoir **5** to the fluid heating chamber **9** thereby controlling the rate of cleaning fluid flow.

Optionally, a power relay or field effect transistor **63** may be connected to the microcontroller **54** by means of wires **64** and **65**. This may provide a means of turning on and off the power to the fluid heating chamber **9** (FIG. 1) through wires **66** and **67**. The power to the fluid heating chamber **9** can be controlled using any suitable criteria, including, for example, being turned on and off based on an algorithm to maintain a specified temperature range as measured by a fluid heating chamber temperature sensor **68** which is connected to the microcontroller **54** by means of wires **69** and **70**.

Optionally, a thermo-mechanical relay device may be used to directly control the power to the fluid heating chamber **9** in response to the temperature of the boiler. One advantage of a microcontroller based control system may be that the temperature hysteresis exhibited by some typical thermo-mechanical devices may be avoided and more precise control may be achieved.

Optionally, an auxiliary electromechanical valve **14** (e.g., as a backup for the water distribution system or the optional cleaning solution distribution system) may be provided in some embodiments, and may be connected to microcontroller **54** by means of wires **71** and **72**.

In the illustrated embodiment, a mechanical switch to indicate that the mop is in the working position, for example a tilt switch or inclination sensor **73**, is optionally connected to the microcontroller **54** by means of wires **74** and **75**.

An accelerometer **76** is optionally connected to the microcontroller **54** by means of wires **111** and **112**.

Optionally, a software algorithm can be used to control the rate of flow of fluid through the electromechanical fluid pump or electromechanical fluid valves **7** and **14** in response to a input signal from one or more of the sensors, such as mechanical switch, a tilt switch or inclination sensor **73** or the accelerometer **76** to indicate that the mop is in the working position. When the mop is in the working position as indicated by sensors and/or the mop is being moved back and forth as indicated by sensor **76**, the microcontroller may cause the electromechanical fluid pump or electromechanical fluid valve **7** to dispense the cleaning fluid. The delivery rate may be any desired rate. For

example, a push/pull rate of about 45-60 strokes per minute for a the 5.5 inches×10.5 inches cleaning pad described with reference to FIG. 1, a cleaning fluid flow rate of between about 1 to 30 ml per minute may be preferred, and a flow rate of between about 3 to 15 ml per minute may be more preferred, and a flow rate of between about 6 to 12 ml per minute may be most preferred. Alternatively, if the push/pull rate is between 30-44 strokes per minute, the preferred cleaning fluid delivery rate may be reduced by an appropriate amount, such as by about 20-25%. If the push/pull rate is between 61 to 75 strokes per minute, the preferred cleaning fluid delivery rate may be increased by an appropriate amount, such as about 15-20%.

Referring again to FIG. 5, in the illustrated embodiment, a series of user controlled switches **80**, **83**, **86**, **89**, **92**, and **95** are connected to the microcontroller **54** by means of wires **81** and **82**, **84** and **85**, and **87** and **88**, **90** and **91**, and **93** and **94** respectively. The switches may be any suitable type of switch that can be incorporated onto the mop.

Switches **80** and **83** may provide the user with a means of increasing or decreasing the flow rate of fluid through the electromechanical fluid pump or electromechanical fluid valve **7** thereby increasing or decreasing the cleaning fluid flow. Switch **86** may provide a means of delivering a “burst of cleaning fluid” by delivering about 2-6 ml of fluid to the fluid heating chamber **9** (or any other suitable quantity) over 2-3 seconds in addition to the normal flow rate of cleaning fluid.

Switch **86** may provide the user with a means of delivering a bust of cleaning fluid by delivering 2-6 ml of cleaning fluid to either the cleaning pad or onto the surface adjacent the cleaning pad, or both.

Switches **89** and **92** enable a user to increase or decrease the oscillating frequency of the motor, solenoid, speaker, ultrasonic transducer or other such actuators provided to create a short mechanical stroke or vibrations in the cleaning pad to assist the cleaning process. Switch **95** enables the user to turn on and off the transducer that is used to create a snort mechanical stroke to assist the cleaning process.

Optionally, a series of lights, e.g., LED lights, **96**, **99**, **102**, and **105** may be connected to the microcontroller **54** by means of wires **97** and **98**, **100** and **101**, **103** and **104**, and **106** and **107** respectively.

LED light **96** may be a headlight for the mop, and may be provided on the floor nozzle or any other suitable location (e.g. the housing).

LED light **99** may be an auxiliary headlight to add additional brightness at the floor when cleaning fluid is sprayed to provide the user with visual feedback of an action.

LED **102** may provide the user with feedback when the water tank is empty which is sensed by the fluid heating chamber temperature sensor **68**. For example, if the fluid heating chamber temperature does not decrease in response to the microcontroller delivering cleaning fluid by activating the electromechanical fluid pump or electromechanical fluid valves **7** the temperature sensor **68** may indicate that cleaning fluid is not available. Alternatively, a float switch in the reservoir can act as the sensor for the status of the water level. Alternatively, the reservoir or a portion thereof can be made transparent so that the user can see the water fill level.

LED **105** may provide the user with feedback that short stroke actuator is on or off.

A master on/off switch **200** is provided in the wire **52** to cut power to the power supply **53**.

In accordance with another aspect of the teachings described herein, which may be used in combination with

any other aspects, optionally, instead of providing functional components in the housing on the upper portion or other upper portions of the mop, the housing containing some, and preferably all, of the functional components (including, for example, the reservoir, heating apparatus, controllers, etc.) may all be incorporated within the floor nozzle or surface cleaning head. In this configuration, the size of the upper portion may be reduced, and it may lower the centre of gravity of the mop. Lowering the centre of gravity may make it easier for a user to maneuver the mop. This configuration may also simplify the relationship between the functional components.

Referring to FIG. 6, a mop **601** is shown. The mop **601** includes a housing **602** and a push handle **603** which incorporates an angled rotating swivel connection **675**. The connection **675** may include any suitable mechanism, and preferably enables the nozzle **604** to be steered when the push handle **602** is rotated. Preferably, the push handle **603** is provided to be long enough to permit a user of the mop **601** to maneuver the housing **602** which, in this embodiment, is also the member to which the floor engaging member, e.g. the cleaning pad **612**, is attached. For example, the push handle **602** may extend at least about 3 feet above the floor surface, and preferably 40 to 48 inches above the floor surface.

In this embodiment, the housing **602** is provided within the floor nozzle **604** and houses a means for heating water or an aqueous cleaning solution and a means of controlling the dispensing of this cleaning solution to the floor. In the illustrated configuration, the housing **602** contains water or an aqueous cleaning solution in a fluid reservoir **605** which is comprised of an upper plastic housing and a lower metallic heating element plate **606**. The heating plate **606** may be any suitable type of heater, including, for example a calrod heating element, a thick film resistor, or another resistive heating means.

Optionally, the water or aqueous cleaning solution reservoir **605** may be filled by means of port **610** with any known cleaning solution, but preferably with an environmentally friendly and safe cleaning and disinfecting agent which is not readily denatured by the application of heat. Examples of such environmentally friendly and safe cleaning and disinfecting agents include quaternary ammonium compounds, colloidal silver, thyme oil, cinnamon oil, rosemary oil, sage oil, acetic acid, hydrogen peroxide, tea tree oil, or a combination thereof.

Flow from the reservoir **605** onto the pad **612** may be controlled by any suitable mechanism, including a valve and/or a regulator. In the illustrated embodiment, a mechanical or electromechanical valve **607** located within or adjacent to the fluid reservoir **605** provides a means of passing controlled volumes of heated aqueous cleaning fluid from within the fluid reservoir **605**, through a penetration **608** in the lower metallic heating plate **606**, and onto the cleaning pad **612**. It is understood that more than one penetration **608** and/or more than one valve **607** may be provided to achieve even wetting of the cleaning pad **612**.

Optionally, the mop **601** can be configured so that delivery of fluid from the reservoir **605** to the pad **612** can be automatically controlled based on the use of the mop **601**. For example, in the illustrated embodiment, a simple mechanical lever or an electrical switch **611** is mounted to the angled rotating swivel connection **675** provides a mechanical or electrical signal every time that the mop is pushed or pulled which opens the valve **607** so as to dispense a preset amount of fluid. In the illustrated embodiment of the mop **601**, in which wherein the cleaning pad is about 5.5

15

inches×10.5 inches, the valve **607** will preferably dispense 0.01 to 1 ml per push or pull cycle, more preferably dispense 0.03 to 0.3 ml per push or pull cycle, and most preferably dispense 0.04 to 0.08 ml per push or pull cycle. An optional trigger **613** connected by mechanism **614** to the simple mechanical lever or an electrical switch **611** is also shown. The trigger **613** allows as user to provide additional cleaning fluid on demand as required.

In the illustrated embodiment, the heating plate **606** heats all of the cleaning fluid contained in the reservoir **605**. Optionally, the heating plate **606** may be integral with and/or form one of the sidewalls of the reservoir **605**. Alternatively, the heating plate **606** may be separate from the sidewalls of the reservoir, and may be positioned inside the reservoir **605** or external the reservoir **605**.

Optionally, mop can include a thermostat or other control mechanism to control the operation of heating plate **606** and the temperature of the cleaning fluid in the reservoir **605**. Providing a temperature control mechanism may help prevent under or over heating of the cleaning fluid, and may help prevent unwanted boiling of the cleaning fluid. In the illustrated embodiment, a thermo-mechanical switch acts as a thermostat and maintains the temperature of the aqueous cleaning solution within the fluid reservoir between of 60 C to 99 C, more preferably 70 C to 97 C and most preferably 85 C to 95 C.

In accordance with another aspect of the teachings described herein, which may be used in combination with any other aspects, the reservoir **605** may be of any suitable shape and/or capacity. Increasing the capacity of the reservoir **605** may allow the mop **601** to be used longer between fill-ups. Alternatively, reducing the capacity of the reservoir **605** may reduce the overall size and weight of the mop **601**. Preferably, a capacity can be selected that provides a useful amount of cleaning time, without being too heavy or cumbersome. Also, the fluid in the reservoir **605** may act as a thermal storage device, which may retain its heat after the heating plate **606** has been turned off. This may allow the cleaning fluid to remain at a useful temperature when the heating plate **606** is turned off and/or when the mop is not plugged in to an external power source. Optionally, the reservoir **605**, and/or other portions of the surface nozzle **604**, may be insulated to help inhibit heat escaping from the cleaning fluid. Alternatively, a phase change material such as a paraffin wax or a low melting temperature metal may be incorporated into the fluid reservoir **605** as a means of storing heat. However, an aqueous solution of the cleaning fluid provides an acceptable energy storage density and a relatively low cost means of energy storage.

In the illustrated embodiment, the reservoir **605** is configured to have a volume of about 115 cubic inches, which is a weight of approximately 4.14 pounds of cleaning fluid. When in use, the pad **612**, which is about 5.5 inches×10.5 inches, may typically lose heat energy to the floor at a rate of 460 btu/hr at 85 C (176 F) for a wooden floor, and 690 btu/hr at 85 C (185 F) for a ceramic floor. If the fluid in the fluid reservoir remains above 80 C (176 F) the cleaning and disinfection efficacy of the cleaning mop is likely to remain desirable. In this configuration, if the reservoir **605** is filled with fluid, and plugged in for 3 to 5 minutes to heat the cleaning solution to about 95 C (203 F), the mop can then be unplugged and used in a cordless manner for between about 10 to about 15 minutes depending upon the type of flooring being cleaned. This configuration may allow a user to plug in the mop **601** in order to initially heat up the cleaning fluid, and then detach the electrical cord and use the mop without being tethered to the wall.

16

Optionally, in accordance with one aspect of the teachings herein that may be combined with any other aspects, the mop **601** may be configured to include an actuator for inducing vibrations and/or short stroke motion in the floor nozzle **604**. The actuators used may be generally similar to the actuators described herein. If actuators are included within the floor nozzle **604**, the reservoir **605** may be shaped to accommodate the placement of the actuators.

Referring to FIG. 7, a modified version of mop **601** is shown in which the reservoir **605** is shaped to accommodate an actuator including motor **641** with rotating shaft **640** and an off-set weight **639**. This rotating-type actuator can introduce vibrations within the floor nozzle **604**. In this embodiment, the reservoir **605** includes a notch or cut-out area to accommodate the actuator.

Referring to FIG. 8, in another modified version of mop **601**, the reservoir is shaped to accommodate two, linear type actuators for creating motion in the floor nozzle **604**. In this embodiment, a solenoid **630** is mounted within the nozzle **604** and has a weight **631** attached to its moving member **632** such that when the solenoid is energized with an AC waveform signal, a linear oscillation is created. The frequency of the AC signal may be varied either periodically or continuously by means of a microcontroller to enhance the mechanical action. Optionally, a second solenoid **633** is mounted within the nozzle **604** has a weight **634** attached to its moving member **635** such that when the solenoid is energized with an AC waveform signal, a linear oscillation is created. More than 2 solenoids may also be employed.

The frequency of the AC signal applied to either or both solenoids **630**, **633** may be varied either periodically or continuously to enhance the mechanical action. The range of applied frequencies for the solenoids **630**, **633** can be any suitable range, including, for example from about 0.01 Hz to about 60 KHz, from about 1 Hz to about 20 KHz and preferably from about 10 Hz to about 30 Hz. Optionally, more than 2 solenoids may be employed.

The terms and expressions which have been employed in the foregoing specification are used therein as terms of description and not of limitation, and there is no intention of the use of such terms and expressions of excluding equivalents of the features shown and described or portions thereof, it being recognized that the scope of the invention is defined and limited only by the claims which follow. What has been described above has been intended to be illustrative of the invention and non-limiting and it will be understood by persons skilled in the art that other variants and modifications may be made without departing from the scope of the invention as defined in the claims appended hereto. The scope of the claims should not be limited by the preferred embodiments and examples, but should be given the broadest interpretation consistent with the description as a whole.

What is claimed is:

1. A surface cleaning apparatus comprising:
 - a) a surface cleaning head including a cleaning pad mount that is configured to receive a cleaning pad;
 - b) a water distribution system including a first heating unit in fluid communication with a water reservoir, the water distribution system having a water outlet in communication with the cleaning pad mount, wherein the first heating unit is located along a fluid flow path from the water reservoir to the water outlet at a location upstream of the water outlet, and the water distribution system is configured to deliver water to the water outlet as liquid water; and,
 - c) a detector that receives a signal indicative of the usage of a cleaning pad provided on the cleaning pad mount

and a controller configured to adjust the amount of water delivered based on a signal from the detector.

2. The surface cleaning apparatus of claim 1 wherein the detector comprises at least one of a detector to determine the inclination of a handle of the surface cleaning apparatus, the rate of change of the inclination of the handle, the velocity of the surface cleaning head, the rate of acceleration of the surface cleaning head and the conductivity of a cleaning pad.

3. The surface cleaning apparatus of claim 1 further comprising a manually controllable actuator operatively connected to the water distribution system.

4. The surface cleaning apparatus of claim 1 further comprising an automatic dispensing system operatively connected to the water distribution system and a manually controllable dispensing system operatively connected to the water distribution system.

5. The surface cleaning apparatus of claim 4 further comprising a cleaning agent distribution system having a cleaning agent outlet and a manually controllable actuator.

6. A surface cleaning apparatus comprising:

- a) a surface cleaning head including a cleaning pad mount that is configured to receive a cleaning pad;
- b) a water distribution system including a first heating unit in fluid communication with a water reservoir, the water distribution system having a water outlet in communication with the cleaning pad mount, wherein the first heating unit is located along a fluid flow path from the water reservoir to the water outlet at a location upstream of the water outlet, and the water distribution system is configured to deliver water to the water outlet as liquid water; and,
- c) a low water level detection circuit, the low water level detection circuit comprising a detector monitoring the work performed by the heating unit and an signal member providing a signal when the level of work performed by the heating unit drops below a threshold limit.

7. The surface cleaning apparatus of claim 6 wherein the water distribution system outputs water and cleaning agent comprising quaternary ammonium compounds, colloidal silver, thyme oil, cinnamon oil, rosemary oil, sage oil, acetic acid, hydrogen peroxide, tea tree oil, or a combination thereof.

8. The surface cleaning apparatus of claim 6 wherein the dispensing outlet or an additional outlet is configured to provide the cleaning solution to a cleaning pad on the cleaning pad mount.

9. The surface cleaning apparatus of claim 6 further comprising a cleaning agent distribution system having a cleaning agent outlet directed at least in front of or behind the surface cleaning head.

10. The surface cleaning apparatus of claim 9 further comprising a controller configured to dispense a cleaning agent from the cleaning agent outlet that is at a leading side of the surface cleaning head based on a direction of travel of the surface cleaning head.

11. The surface cleaning apparatus of claim 6 wherein the water distribution system further comprises an outlet directed at least in front of or behind the surface cleaning head and a controller configured to dispense a water from the outlet that is at a leading side of the surface cleaning head based on a direction of travel of the surface cleaning head.

12. The surface cleaning apparatus of claim 6 wherein the water distribution system is configured to deliver a predetermined amount of water for each stroke of the surface cleaning head.

13. The surface cleaning apparatus of claim 6 wherein the cleaning pad mount is moveably mounted to the surface cleaning head and the surface cleaning head further comprises a drive unit drivingly connected to the cleaning pad mount.

14. The surface cleaning apparatus of claim 13 wherein the drive unit is drivingly connected to the cleaning pad mount to move the cleaning pad mount in a plane that is essentially parallel to a surface to be cleaned.

15. The surface cleaning apparatus of claim 13 wherein the drive unit comprises at least one motor and at least one offset weight.

16. The surface cleaning apparatus of claim 13 wherein the drive unit comprises at least one of a solenoid, a sonic transducer, an ultrasonic transducer and a loudspeaker.

17. The surface cleaning apparatus of claim 6 wherein at least one of the water reservoir, and the heating unit is provided in the surface cleaning head.

18. The surface cleaning apparatus of claim 17 wherein the surface cleaning head has a height less than about 4 inches.

19. The surface cleaning apparatus of claim 6 wherein at least a portion of the water reservoir is transparent.

20. The surface cleaning apparatus of claim 6 further comprising at least one light to illuminate the water reservoir or to illuminate an area in front of the surface cleaning head.

21. The surface cleaning apparatus of claim 6 further comprising at least one light to illuminate the water reservoir and a control system to vary the illumination when the water reservoir reaches a low fluid level.

22. The surface cleaning apparatus of claim 21 wherein the cleaning pad comprises a hydrophobic material and a hydrophilic material.

23. The surface cleaning apparatus of claim 6 wherein the detector monitors the temperature of the heating unit.

24. The surface cleaning apparatus of claim 6 further comprising a cleaning pad, wherein the cleaning pad comprises a hydrophobic material.

25. The surface cleaning apparatus of claim 6 further comprising a second heating unit thermally connected to the cleaning pad mount.

26. The surface cleaning apparatus of claim 6 wherein the first heating unit is thermally connected to the cleaning pad mount.

* * * * *